



Totally Focused. Totally Independent.

Technical Specification

NPE32 4 C



Dynamic Data Support

The world's largest
independent producer of
alternators 1 – 5,000kVA

Standards

Alternators are designed and produced within an ISO 9001 environment. The entire series is manufactured according to, and complies with, the most common specifications such as CEI 2-3, IEC 34-1, EN 60034-1, VDE 0530, BS 4999-5000, NF 51.111, NEMA MG 1-2011, ISO 8528-3. They also comply with other specific standards such as UL1446, UL 1004/4 and /B and CAN/CSA-C22.2 No14-95-No100-95.

Windings and Performances

All windings are 2/3rds pitch to eliminate triplen harmonics within the voltage waveform and to avoid excessive neutral currents in certain parallel operating conditions. A fully interconnected aluminium or copper damper cage is supplied on the rotor of all models (excluding the ECP3 series).


- ▶ 12 wire reconnectable:
50Hz – 380V to 440V and 220/110V to 240/120V (de-rates may apply at certain voltages)
60Hz – 380V to 480V and 220/110V to 240/120V (de-rates may apply at certain voltages)
- ▶ 6 wire reconnectable:
50Hz – 380V to 440V and 220V to 240V (de-rates may apply at certain voltages)
60Hz – 380V to 480V and 220V to 240V (de-rates may apply at certain voltages)

| Winding Configurations | Standard | | Special (dedicated) | | | |
|---------------------------------|---|-------------------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|
| | 12 wire Reconnectable | 6 wire Reconnectable | 380V and 600V 60Hz | 690V 50/60Hz | 220-240V 1ph 50Hz | 220-240V 1ph 60Hz |
| ECP3 to ECO38 | Std | Option | Option | Option | Option | Option |
| ECO40 to ECO46 | Std | Option | Option | Option | | |
| ECO47 | Std 4 wires | | Option | Option | Option (to ECO40) | |
| Insulation materials | Class H | Class H | Class H | Class H | Class H | Class H |
| High efficiency | Std | Std | Std | Std | Std | Std |
| High motor starting | >300% | >300% | >300% | >300% | >300% | >300% |
| THD (Total Harmonic Distortion) | Typically <3.5% full load L-L | Typically <3.0% full load L-L | Typically <3.5% full load L-L | Typically <3.5% full load L-L | Typically <4.5% full load L-N | Typically <4.5% full load L-N |
| Interference suppression | VDE 0875 G/N/K, EN61000-6-3, EN61000-6-2, others available on request | | | | | |

Winding Protection

There are various degrees of protection for the windings following the standard impregnation process, as can be seen here. The TOTAL+ butadienic black flexible coating is recommended for arduous applications.

| Winding Protection: | STANDARD | STANDARD+ | GREY | GREY+ | TOTAL+ |
|-----------------------|----------|-----------|--------|--------|--------|
| ECP3 | Std | Option | Option | Option | Option |
| ECP28 and ECP32 | - | Std | Option | Option | Option |
| NPE32, ECP34 to ECO47 | - | - | Std | Option | Option |

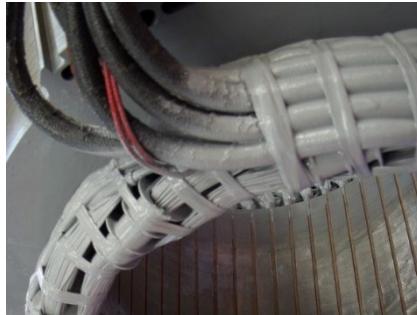

Grey treatment (marinization) on the left, TOTAL+ treatment shown on the right. The EG43 grey varnish, is an high temperature insulating enamel that forms a tough and flexible film, with excellent moisture and chemical protection. It is water and oil proof, and also protects windings from abrasion. It is applied spraying an over coating layer over the impregnated winding, or dipping the stator in a varnish barrel for superior treatments.

The TOTAL+ is a Mecc Alte protection system. It is the ultimate winding treatment that offers truly superior performances when the environment is really harsh, or the application very demanding. The TOTAL+ is also extremely resistant to the particle abrasion as it adsorbs the impacts.

Design


The robust mechanical structure withstands up to 5G in any direction and 9G vertically and its design permits easy access to the connections and components during routine maintenance check-ups. The mechanical design has used the most advanced FEM analisys. The materials used are: DD12 steel for the frame, C45 steel for the shaft and cast iron or aluminum pressure die cast for the end-brackets: fans are either aluminum die casted or nylon fiber glass loaded, UL compliant materials. Rotors are dynamically balanced according grades 6.3 (up to series 32) or 2.5 (from series 34 onwards) of ISO 1940-1.

Terminals and Terminal Box

Easy access to regulators is assured through a pull out drawer or a drop down panel to allow safer adjustment. Large terminal boxes allow easy access of power cables, in the ECO43 and ECO46 higher power ranges the terminal allow the convenient choice of power cable or busbar connection with versatility of entry and connection. Current transformers are available as an option on series ECO 40, 43, 46 and 47 with single or dual output.



On C type family has been installed a new AVR panel. Terminal boards have been redesigned into a special L configuration, specifically to ease customer wiring; with this kind of terminal board it is possible to place a second terminal board in order to get 12 available terminals. Current transformers are available as an option on series ECO38 with single or dual output.

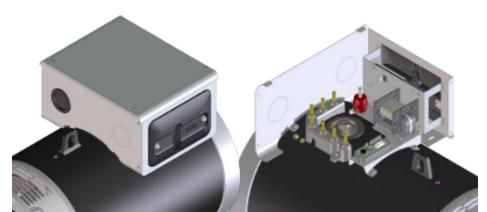

Ingress Protection

In addition to the protection on the windings themselves, alternators can increase the protection on the inlet side. Standard level is IP23 but the following solutions are also available: IP23 DP with inlet filters, IP23 with only terminal box in IP45, IP43 and IP45. Derates may be applied.



Info: https://www.meccalte.com/downloads/MA0605_Bulletin_IP.pdf

Excitation and Regulation Systems

All ECP/ECO series have MAUX auxiliary winding to power the digital regulator. Both DSR and the DER1 are available to connect to PC through the DxR2 USB interface and DxR TERMINAL software to interrogate/download alarms & settings for analysis or for cloning other regulators. DER2 has got an integrated USB connection and can be connected to the PC without any optional connection boards. More settings such as LAMS, digital RAM based synchronous external control and soft start are obtainable through the DxR connection. Simple analogue potentiometers are available for the more usual adjustments.

| Excitation Systems | DSR | DER1 | DER2 |
|--|-------|---------|---------|
| ECP3 to ECO38 | Std | Option | Option |
| ECO40 to ECO46 | - | Std | Option |
| ECO47 | - | - | Std |
| Parallel Operation | ✓ | ✓ | ✓ |
| Mains Parallel | ✓ | ✓ | ✓ |
| 3 Phase Sensing (rms) | - | ✓ | ✓ |
| Accuracy | +/-1% | +/-0.5% | +/-0.5% |
| Remote Voltage Control | ✓ | ✓ | ✓ |
| Alarm Log | ✓ | ✓ | ✓ |
| Analogue and Digital Configurable | ✓ | ✓ | ✓ |
| LAMS (Load Acceptance V/f) | ✓ | ✓ | ✓ |
| APO (Active Protection Output) | ✓ | ✓ | ✓ |
| Soft Start | ✓ | ✓ | ✓ |
| High dynamic response | - | - | ✓ |
| USB connection without external boards | - | - | ✓ |

For a given motor start duty a smaller generator may be selected – as it has lower subtransient reactance values for non-linear loads. The whole range from 6.5 to 3400kVA is capable of >300% sustained short circuit current for up to 20 seconds.

Optional PMG


The Mecc Alte PMG is available on ECP28, ECP30, ECP32, ECP34 and ECO38 as factory-fitted option; alternatively, only the predisposition for the retrofit, for subsequent assembly, is available on option.



On ECO 40, 43 and 46 series it is available as a factory-fitted or retro-fitted options.


For ECO47 PMG is standard.

The complete AVR range is fully compatible with both MAUX and PMG systems, this minimises spare part management and flexibility of stock as one AVR suits all applications. The PMG is delivering the same amount of kVA available with the MAUX.



Dew Heater

Our entire range can be equipped with anti-condensation resistors of adequate power and sized for the alternator. Voltage for heaters must be specified when ordering. New cylindrical cartridge style heaters are available on request and it can be retrofitted.

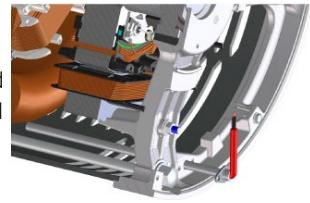

Accessories

Additional optionals can be fit on our alternator series, such as PTC thermistors or PT100 both on windings and bearings, dew heaters, high and low profile of terminal boxes (on most series), parallel devices, current and voltage transformers, air filters, IP43 and IP45 protections and many others.

For more info visit: <https://www.meccalte.com/en/products/alternators/accessories/c-type-accessories>

Deration coefficients

| Altitude (meters) | Ambient temperature (Celsius) | | | | | | | |
|-------------------|-------------------------------|------|------|------|------|------|------|------|
| | 25 | 40 | 45 | 50 | 55 | 60 | 65 | 70 |
| ≤ 1000 | 1.07 | 1 | 0.96 | 0.93 | 0.91 | 0.89 | 0.85 | 0.82 |
| > 1000 ≤ 1500 | 1.01 | 0.96 | 0.92 | 0.89 | 0.87 | 0.84 | 0.81 | 0.77 |
| > 1500 ≤ 2000 | 0.96 | 0.91 | 0.87 | 0.84 | 0.83 | 0.79 | 0.77 | 0.73 |
| > 2000 ≤ 3000 | 0.90 | 0.85 | 0.81 | 0.78 | 0.76 | 0.73 | 0.71 | 0.68 |
| > 3000 ≤ 4000 | 0.84 | 0.78 | 0.75 | 0.73 | 0.70 | 0.68 | 0.66 | 0.62 |
| > 4000 ≤ 5000 | 0.78 | 0.72 | 0.69 | 0.67 | 0.65 | 0.62 | 0.59 | 0.56 |
| > 5000 ≤ 6000 | 0.70 | 0.65 | 0.63 | 0.61 | 0.58 | 0.55 | 0.53 | 0.50 |

Notes on short circuit curves

The indicated coefficients have to be used to correct the three phase short circuit curves values as a function of the rated voltage. The indicated coefficient have to be used to correct the three phase short circuit curves values as a function of the type of short circuit voltage.

| 50 Hz | | 60 Hz | | <i>Istantaneous</i> | <i>3 phase</i> | <i>2 phase L-L</i> | <i>1 phase L-N</i> |
|---------|--------|---------|--------|---------------------|----------------|--------------------|--------------------|
| Voltage | Factor | Voltage | Factor | | | | |
| 380 | 0.93X | 415 | 0.85X | 1X | 0.87X | 1.30X | |
| 400 | 1X | 440 | 0.90X | 1X | 1.80X | 3.20X | |
| 415 | 1.04X | 460 | 0.95X | 1X | 1.50X | 2.50X | |
| 440 | 1.10X | 480 | 1X | 20 sec. | 10 sec. | 4 sec. | |

All the curves are shown for series or parallel star connection at 400V 50 Hz or 480V 60 Hz. If the unit is reconnected from series to parallel star, the additional coefficient is 2X. From series star to series delta, it is 1.72X. From series star to parallel delta, it is 3.44X.

General characteristics

| | | | |
|------------------------|-----------|-------------------|--------------|
| Pole number | 4 | Insulation class | H |
| Phase number | 3 | Protection class | IP23 |
| Number of wires | 12 | NDE Bearing type | 6305-2RS1 C3 |
| Execution | Brushless | DE Bearing type | - |
| Regulator type | DSR | Maximum Overspeed | 2250 |
| Winding pitch | 2/3 | Altitude | 0-1000 |
| Code voltage reference | T040553 | Balancing | ISO1940-1 |

Ratings 50Hz

| kVA / kW @ Temp. Rise / Ambient °C - 0.8 PF | | | | | | | | | | | | | | | | | | | | | |
|---|------------|-------------|-------------|-------------|-------------|-------------|----------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| STANDBY-163/27 | | | | | | | STANDBY-150/40 | | | H-125/40 | | | F-105/40 | | B-80/40 | | | | | | |
| Series Star Y | 380V | 400V | 415V | 440V | 380V | 400V | 415V | 440V | 380V | 400V | 415V | 440V | 380V | 400V | 415V | 440V | | | | | |
| Parallel Star YY | 190V | 200V | 208V | 220V | 190V | 200V | 208V | 220V | 190V | 200V | 208V | 220V | 190V | 200V | 208V | 220V | | | | | |
| Series Delta Δ | 220V | 230V | 240V | 254V | 220V | 230V | 240V | 254V | 220V | 230V | 240V | 254V | 220V | 230V | 240V | 254V | | | | | |
| Parallel Delta ΔΔ | 110V | 115V | 120V | 127V | 110V | 115V | 120V | 127V | 110V | 115V | 120V | 127V | 110V | 115V | 120V | 127V | | | | | |
| NPE32 1S4 C | kVA | 8,8 | 8,8 | 8,8 | 7 | 8,3 | 8,3 | 8,3 | 6,8 | 8 | 8 | 8 | 6,4 | 7,8 | 7,8 | 7,8 | 6,2 | 6,4 | 6,4 | 5,1 | |
| | kW | 7 | 7 | 7 | 5,6 | 6,6 | 6,6 | 6,6 | 5,4 | 6,4 | 6,4 | 6,4 | 5,1 | 6,2 | 6,2 | 6,2 | 5 | 5,1 | 5,1 | 4,1 | |
| NPE32 2S4 C | kVA | 12,1 | 12,1 | 12,1 | 9,7 | 11,6 | 11,6 | 11,6 | 9,3 | 11 | 11 | 11 | 8,8 | 10 | 10 | 10 | 8 | 8,8 | 8,8 | 8,8 | 7 |
| | kW | 9,7 | 9,7 | 9,7 | 7,8 | 9,3 | 9,3 | 9,3 | 7,4 | 8,8 | 8,8 | 8,8 | 7 | 8 | 8 | 8 | 6,4 | 7 | 7 | 7 | 5,6 |
| NPE32 1M4 C | kVA | 17,6 | 17,6 | 17,6 | 13,5 | 16,7 | 16,7 | 16,7 | 13,1 | 16 | 16 | 16 | 12,3 | 14,8 | 14,8 | 14,8 | 11,8 | 12,8 | 12,8 | 12,8 | 9,8 |
| | kW | 14,1 | 14,1 | 14,1 | 10,8 | 13,4 | 13,4 | 13,4 | 10,5 | 12,8 | 12,8 | 12,8 | 9,8 | 11,8 | 11,8 | 11,8 | 9,4 | 10,2 | 10,2 | 10,2 | 7,8 |
| NPE32 2M4 C | kVA | 22 | 22 | 22 | 18,2 | 20,9 | 20,9 | 20,9 | 16,7 | 20 | 20 | 20 | 16,5 | 18,2 | 18,2 | 18,2 | 14,6 | 16 | 16 | 16 | 13,2 |
| | kW | 17,6 | 17,6 | 17,6 | 14,6 | 16,7 | 16,7 | 16,7 | 13,4 | 16 | 16 | 16 | 13,2 | 14,6 | 14,6 | 14,6 | 11,7 | 12,8 | 12,8 | 12,8 | 10,6 |
| NPE32 L4 C | kVA | 27,5 | 27,5 | 27,5 | 22 | 26,2 | 26,2 | 26,2 | 21,3 | 25 | 25 | 25 | 20 | 23 | 23 | 23 | 18 | 20 | 20 | 20 | 16 |
| | kW | 22 | 22 | 22 | 17,6 | 21 | 21 | 21 | 17 | 20 | 20 | 20 | 16 | 18,4 | 18,4 | 18,4 | 14,4 | 16 | 16 | 16 | 12,8 |
| NPE32 VL4 C | kVA | 38,5 | 38,5 | 38,5 | 30,8 | 36,4 | 36,4 | 36,4 | 29,6 | 35 | 35 | 35 | 28 | 31,8 | 31,8 | 31,8 | 25,5 | 28 | 28 | 28 | 22,4 |
| | kW | 30,8 | 30,8 | 30,8 | 24,6 | 29,1 | 29,1 | 29,1 | 23,7 | 28 | 28 | 28 | 22,4 | 25,4 | 25,4 | 25,4 | 20,4 | 22,4 | 22,4 | 22,4 | 17,9 |

Ratings 60Hz

| kVA / kW @ Temp. Rise / Ambient °C - 0.8 PF | | | | | | | | | | | | | | | | | | | | | |
|---|------------|-------------|-------------|-------------|-------------|-------------|----------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| STANDBY-163/27 | | | | | | | STANDBY-150/40 | | | H-125/40 | | | F-105/40 | | B-80/40 | | | | | | |
| Series Star Y | 415V | 440V | 460V | 480V | 415V | 440V | 460V | 480V | 415V | 440V | 460V | 480V | 415V | 440V | 460V | 480V | | | | | |
| Parallel Star YY | 208V | 220V | 230V | 240V | 208V | 220V | 230V | 240V | 208V | 220V | 230V | 240V | 208V | 220V | 230V | 240V | | | | | |
| Series Delta Δ | 240V | 254V | 265V | 277V | 240V | 254V | 265V | 277V | 240V | 254V | 265V | 277V | 240V | 254V | 265V | 277V | | | | | |
| Parallel Delta ΔΔ | 120V | 127V | 133V | 138V | 120V | 127V | 133V | 138V | 120V | 127V | 133V | 138V | 120V | 127V | 133V | 138V | | | | | |
| NPE32 1S4 C | kVA | 8,6 | 11 | 11 | 11 | 8,4 | 10,6 | 10,6 | 10,6 | 8 | 10 | 10 | 10 | 7 | 9,3 | 9,3 | 9,3 | 6,2 | 8 | 8 | 8 |
| | kW | 6,9 | 8,8 | 8,8 | 8,8 | 6,7 | 8,5 | 8,5 | 8,5 | 6,4 | 8 | 8 | 8 | 5,6 | 7,4 | 7,4 | 7,4 | 5 | 6,4 | 6,4 | 6,4 |
| NPE32 2S4 C | kVA | 12,1 | 14,3 | 14,3 | 14,3 | 11,6 | 13,8 | 13,8 | 13,8 | 11 | 13 | 13 | 13 | 10,1 | 11,6 | 11,6 | 11,6 | 8,8 | 10,4 | 10,4 | 10,4 |
| | kW | 9,7 | 11,4 | 11,4 | 11,4 | 9,3 | 11 | 11 | 11 | 8,8 | 10,4 | 10,4 | 10,4 | 8,1 | 9,3 | 9,3 | 9,3 | 7 | 8,3 | 8,3 | 8,3 |
| NPE32 1M4 C | kVA | 16,9 | 20,9 | 20,9 | 20,9 | 16,7 | 19,9 | 19,9 | 19,9 | 15,4 | 19 | 19 | 19 | 14,2 | 17,2 | 17,2 | 17,2 | 12,3 | 15,2 | 15,2 | 15,2 |
| | kW | 13,5 | 16,7 | 16,7 | 16,7 | 13,4 | 15,9 | 15,9 | 15,9 | 12,3 | 15,2 | 15,2 | 15,2 | 11,4 | 13,8 | 13,8 | 13,8 | 9,8 | 12,2 | 12,2 | 12,2 |
| NPE32 2M4 C | kVA | 22,7 | 26,4 | 26,4 | 26,4 | 21,1 | 24,9 | 24,9 | 24,9 | 20,6 | 24 | 24 | 24 | 19,5 | 21,7 | 21,7 | 21,7 | 16,5 | 19,2 | 19,2 | 19,2 |
| | kW | 18,2 | 21,1 | 21,1 | 21,1 | 16,9 | 19,9 | 19,9 | 19,9 | 16,5 | 19,2 | 19,2 | 19,2 | 15,6 | 17,4 | 17,4 | 17,4 | 13,2 | 15,4 | 15,4 | 15,4 |
| NPE32 L4 C | kVA | 28,6 | 34,1 | 34,1 | 34,1 | 27,2 | 32,5 | 32,5 | 32,5 | 26 | 31 | 31 | 31 | 24 | 28,5 | 28,5 | 28,5 | 20,8 | 24,8 | 24,8 | 24,8 |
| | kW | 22,9 | 27,3 | 27,3 | 27,3 | 21,8 | 26 | 26 | 26 | 21 | 24,8 | 24,8 | 24,8 | 19,2 | 22,8 | 22,8 | 22,8 | 16,6 | 19,8 | 19,8 | 19,8 |
| NPE32 VL4 C | kVA | 39,4 | 46,2 | 46,2 | 46,2 | 37,1 | 43,7 | 43,7 | 43,7 | 35,8 | 42 | 42 | 42 | 33,3 | 38,3 | 38,3 | 38,3 | 28,6 | 33,6 | 33,6 | 33,6 |
| | kW | 31,5 | 37 | 37 | 37 | 29,7 | 35 | 35 | 35 | 28,6 | 33,6 | 33,6 | 33,6 | 26,6 | 30,6 | 30,6 | 30,6 | 22,9 | 26,9 | 26,9 | 26,9 |

Reactance & Time constants- Class H / 400V

| Unsaturated (ref. EN60034-4) | | NPE32 1S4 C | NPE32 2S4 C | NPE32 1M4 C | NPE32 2M4 C | NPE32 L4 C | NPE32 VL4 C |
|------------------------------|--|-------------|-------------|-------------|-------------|------------|-------------|
| X_d | Direct-axis synchronous reactance % | 418,9 | 387,9 | 374,7 | 389 | 448,6 | 402,8 |
| X'_d | Direct-axis transient reactance % | 20,6 | 19,1 | 18,4 | 19,1 | 22 | 19,8 |
| X"_d | Direct-axis subtransient reactance % | 14,7 | 13,6 | 13,1 | 13,7 | 15,8 | 14 |
| X_q | Quadrature-axis synchronous reactance % | 134,5 | 124,5 | 120,5 | 125,1 | 143,9 | 129,5 |
| X'_q | Quadrature-axis transient reactance % | 134,5 | 124,5 | 120,5 | 125,1 | 143,9 | 129,5 |
| X"_q | Quadrature-axis subtransient reactance % | 44,9 | 41,6 | 40,2 | 41,7 | 48,1 | 43,2 |
| X₂ | Negative-sequence reactance % | 29,2 | 27 | 26,1 | 27,1 | 31,3 | 28 |
| X₀ | Zero sequence reactance % | 3,83 | 3,54 | 3,42 | 3,55 | 4,1 | 3,68 |
| Saturated | | | | | | | |
| X_d | Direct-axis synchronous reactance % | 356,1 | 329,7 | 318,5 | 330,6 | 381,3 | 342,4 |
| X'_d | Direct-axis transient reactance % | 17,5 | 16,2 | 15,6 | 16,2 | 18,7 | 16,8 |
| X"_d | Direct-axis subtransient reactance % | 12,5 | 11,6 | 11,1 | 11,6 | 13,4 | 11,9 |
| X_q | Quadrature-axis synchronous reactance % | 114,3 | 105,8 | 102,4 | 106,3 | 122,3 | 110,1 |
| X'_q | Quadrature-axis transient reactance % | 114,3 | 105,8 | 102,4 | 106,3 | 122,3 | 110,1 |
| X"_q | Quadrature-axis subtransient reactance % | 38,2 | 35,4 | 34,2 | 35,4 | 40,9 | 36,7 |
| X₂ | Negative-sequence reactance % | 24,8 | 23 | 22,2 | 23 | 26,6 | 23,8 |
| X₀ | Zero sequence reactance % | 3,83 | 3,54 | 3,42 | 3,55 | 4,1 | 3,68 |
| K_{cc} | Short circuit ratio | 0,28 | 0,3 | 0,31 | 0,3 | 0,26 | 0,29 |
| T'_d | Transient time constant sec | 0,053 | 0,053 | 0,055 | 0,055 | 0,068 | 0,064 |
| T"_d | Subtransient time constant sec | 0,083 | 0,085 | 0,085 | 0,086 | 0,086 | 0,086 |
| T'do | Open circuit time constant sec | 1,08 | 1,08 | 1,11 | 1,11 | 1,39 | 1,3 |
| T_a | Armature time constant sec | 0,008 | 0,008 | 0,015 | 0,019 | 0,022 | 0,025 |

Additional information - Class H / 400V

| | | | | | | | |
|--|-----------------------------------|-----------|-----------|---------|-----------|-----------|-----------|
| I₀ | Excitation current at no load A | 0,5 | 0,5 | 0,7 | 0,8 | 0,9 | 1,1 |
| I_c | Excitation current at full load A | 3,0 | 3,1 | 3,2 | 3,0 | 2,5 | 3,3 |
| Overload | | | | | | | |
| Overload per 10 sec. % | | | | | | | |
| Heat dissipation | W | 1444 | 2091 | 2983 | 3488 | 4752 | 5776 |
| Telephone Harmonic Factor - THF | % | <2 | <2 | <2 | <2 | <2 | <2 |
| Waveform Distors.(THD) full load LL/LN | % | 4,5 / 4,5 | 4,5 / 4,5 | 4 / 4 | 3,8 / 3,8 | 3,5 / 3,5 | 3,5 / 3,5 |
| Waveform Distors.(THD) no load LL/LN | % | 6,5 / 6 | 6,5 / 6 | 5 / 4,5 | 4,5 / 4,5 | 3,8 / 3,8 | 3,8 / 3,8 |

Reactance & Time constants- Class H / 480V







| Unsaturated (ref. EN60034-4) | | NPE32 1S4 C | NPE32 2S4 C | NPE32 1M4 C | NPE32 2M4 C | NPE32 L4 C | NPE32 VL4 C |
|------------------------------|--|-------------|-------------|-------------|-------------|------------|-------------|
| X_d | Direct-axis synchronous reactance % | 436,4 | 382 | 370,8 | 389 | 463,6 | 402,8 |
| X'_d | Direct-axis transient reactance % | 21,5 | 18,8 | 18,2 | 19,1 | 22,7 | 19,8 |
| X"_d | Direct-axis subtransient reactance % | 15,3 | 13,4 | 13 | 13,7 | 16,3 | 14 |
| X_q | Quadrature-axis synchronous reactance % | 140,1 | 122,6 | 119,2 | 125,1 | 148,7 | 129,5 |
| X'_q | Quadrature-axis transient reactance % | 140,1 | 122,6 | 119,2 | 125,1 | 148,7 | 129,5 |
| X"_q | Quadrature-axis subtransient reactance % | 46,8 | 41 | 39,8 | 41,7 | 49,7 | 43,2 |
| X₂ | Negative-sequence reactance % | 30,4 | 26,6 | 25,8 | 27,1 | 32,3 | 28 |
| X₀ | Zero sequence reactance % | 3,99 | 3,49 | 3,38 | 3,55 | 4,24 | 3,68 |
| Saturated | | | | | | | |
| X_d | Direct-axis synchronous reactance % | 370,9 | 324,7 | 315,2 | 330,6 | 394,1 | 342,4 |
| X'_d | Direct-axis transient reactance % | 18,3 | 16 | 15,5 | 16,2 | 19,3 | 16,8 |
| X"_d | Direct-axis subtransient reactance % | 13 | 11,4 | 11 | 11,6 | 13,9 | 11,9 |
| X_q | Quadrature-axis synchronous reactance % | 119,1 | 104,2 | 101,3 | 106,3 | 126,4 | 110,1 |
| X'_q | Quadrature-axis transient reactance % | 119,1 | 104,2 | 101,3 | 106,3 | 126,4 | 110,1 |
| X"_q | Quadrature-axis subtransient reactance % | 39,8 | 34,8 | 33,8 | 35,4 | 42,2 | 36,7 |
| X₂ | Negative-sequence reactance % | 25,8 | 22,6 | 21,9 | 23 | 27,5 | 23,8 |
| X₀ | Zero sequence reactance % | 3,99 | 3,49 | 3,38 | 3,55 | 4,24 | 3,68 |
| K_{cc} | Short circuit ratio | 0,27 | 0,31 | 0,32 | 0,3 | 0,25 | 0,29 |
| T'_d | Transient time constant sec | 0,053 | 0,053 | 0,055 | 0,055 | 0,068 | 0,064 |
| T"_d | Subtransient time constant sec | 0,083 | 0,085 | 0,085 | 0,086 | 0,086 | 0,086 |
| T'do | Open circuit time constant sec | 1,08 | 1,08 | 1,11 | 1,11 | 1,39 | 1,3 |
| T_a | Armature time constant sec | 0,008 | 0,008 | 0,015 | 0,019 | 0,022 | 0,025 |

Additional information - Class H / 480V

| | | | | | | | |
|--|-----------------------------------|-----------|-----------|---------|-----------|-----------|-----------|
| I₀ | Excitation current at no load A | 0,5 | 0,5 | 0,7 | 0,8 | 0,9 | 1,1 |
| I_c | Excitation current at full load A | 3,0 | 3,1 | 3,2 | 3,0 | 2,5 | 3,3 |
| Overload | | | | | | | |
| Overload per 10 sec. % | | | | | | | |
| Heat dissipation | W | 1711 | 2487 | 3612 | 4272 | 6007 | 7068 |
| Telephone Interference Factor - TIF | | <50 | <50 | <50 | <50 | <50 | <50 |
| Waveform Distors.(THD) full load LL/LN | % | 4,5 / 4,5 | 4,5 / 4,5 | 4 / 4 | 3,8 / 3,8 | 3,5 / 3,5 | 3,5 / 3,5 |
| Waveform Distors.(THD) no load LL/LN | % | 6,5 / 6 | 6,5 / 6 | 5 / 4,5 | 4,5 / 4,5 | 3,8 / 3,8 | 3,8 / 3,8 |







Efficiencies @ 50Hz

| Models | | 380V 50Hz | | | | | 400V 50Hz | | | | | 415V 50Hz | | | | | 440V 50Hz | | | | |
|-------------|---|-----------|------|------|------|------|-----------|------|------|------|------|-----------|------|------|------|------|-----------|------|------|------|------|
| | | 0.25 | 0.5 | 0.75 | 1 | 1.1 | 0.25 | 0.5 | 0.75 | 1 | 1.1 | 0.25 | 0.5 | 0.75 | 1 | 1.1 | 0.25 | 0.5 | 0.75 | 1 | 1.1 |
| NPE32 1S4 C | % | 76,4 | 81,4 | 81,7 | 80,7 | 80,2 | 79,5 | 81,4 | 81,6 | 80,6 | 80,1 | 76,1 | 81,1 | 81,4 | 80,4 | 79,9 | 75,7 | 80,8 | 80,7 | 79,8 | 79,3 |
| NPE32 2S4 C | % | 79,5 | 81,6 | 81,8 | 80,9 | 80,4 | 79,6 | 81,6 | 81,7 | 80,8 | 80,3 | 79,2 | 81,3 | 81,5 | 80,6 | 80,0 | 78,8 | 80,9 | 80,8 | 80,0 | 79,5 |
| NPE32 1M4 C | % | 79,7 | 81,8 | 82,1 | 81,0 | 80,5 | 80,0 | 82,0 | 82,2 | 81,1 | 80,6 | 79,5 | 81,6 | 81,9 | 80,8 | 80,2 | 79,0 | 81,1 | 81,2 | 80,2 | 79,7 |
| NPE32 2M4 C | % | 80,3 | 83,6 | 83,2 | 82,0 | 81,4 | 80,6 | 83,8 | 83,3 | 82,1 | 81,5 | 80,1 | 83,4 | 83,0 | 81,8 | 81,1 | 79,7 | 83,0 | 82,3 | 81,2 | 80,6 |
| NPE32 L4 C | % | 79,5 | 81,6 | 81,8 | 80,9 | 80,4 | 79,6 | 81,6 | 81,7 | 80,8 | 80,3 | 79,2 | 81,3 | 81,4 | 80,5 | 79,9 | 78,8 | 80,9 | 80,8 | 80,0 | 79,5 |
| NPE32 VL4 C | % | 81,2 | 83,9 | 83,7 | 82,7 | 82,2 | 81,8 | 84,4 | 84,0 | 82,9 | 82,4 | 81,3 | 83,9 | 83,6 | 82,5 | 81,9 | 80,9 | 83,6 | 83,0 | 82,0 | 81,5 |

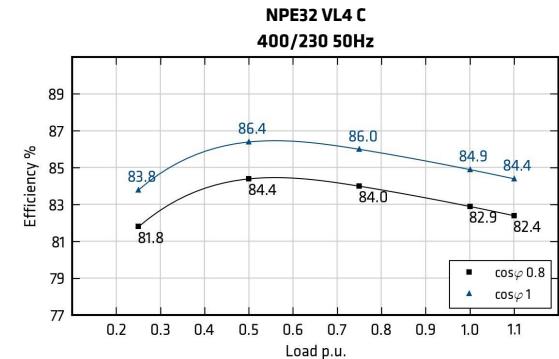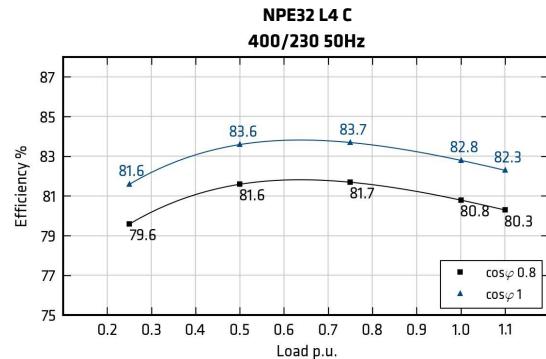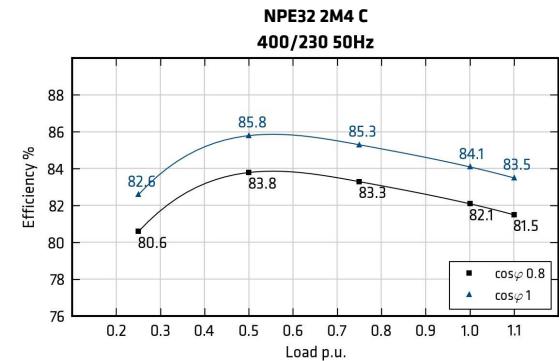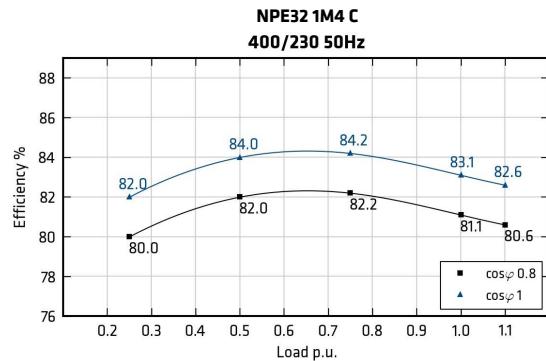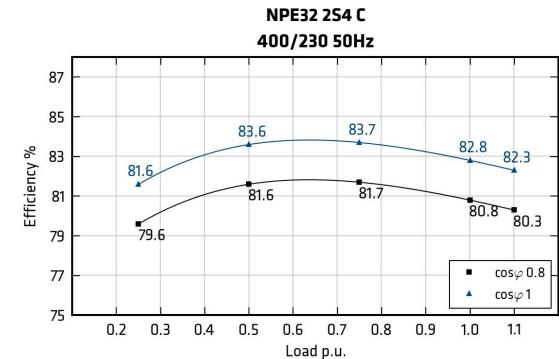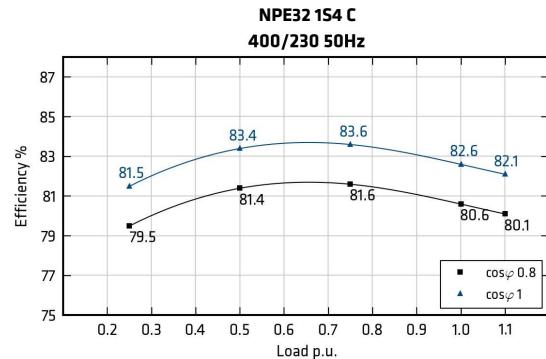


Efficiencies @ 60Hz

| Models | | 415V 60Hz | | | | | 440V 60Hz | | | | | 460V 60Hz | | | | | 480V 60Hz | | | | |
|-------------|---|-----------|------|------|------|------|-----------|------|------|------|------|-----------|------|------|------|------|-----------|------|------|------|------|
| | | 0.25 | 0.5 | 0.75 | 1 | 1.1 | 0.25 | 0.5 | 0.75 | 1 | 1.1 | 0.25 | 0.5 | 0.75 | 1 | 1.1 | 0.25 | 0.5 | 0.75 | 1 | 1.1 |
| NPE32 1S4 C | % | 76,2 | 81,3 | 81,4 | 80,5 | 80,1 | 76,5 | 81,4 | 81,4 | 80,5 | 80,0 | 76,8 | 81,7 | 81,8 | 80,9 | 80,5 | 76,8 | 81,7 | 81,7 | 80,8 | 80,4 |
| NPE32 2S4 C | % | 78,9 | 81,1 | 81,1 | 80,4 | 79,9 | 79,2 | 81,2 | 81,1 | 80,5 | 80,0 | 79,5 | 81,5 | 81,5 | 80,8 | 80,3 | 79,5 | 81,5 | 81,4 | 80,7 | 80,4 |
| NPE32 1M4 C | % | 79,2 | 81,4 | 81,5 | 80,4 | 80,0 | 79,4 | 81,5 | 81,5 | 80,4 | 80,0 | 79,6 | 81,7 | 81,8 | 80,7 | 80,2 | 79,8 | 81,9 | 81,9 | 80,8 | 80,4 |
| NPE32 2M4 C | % | 79,7 | 83,0 | 82,5 | 81,3 | 81,0 | 80,0 | 83,2 | 82,6 | 81,4 | 81,0 | 80,2 | 83,4 | 82,9 | 81,7 | 81,3 | 80,4 | 83,6 | 83,0 | 81,8 | 81,3 |
| NPE32 L4 C | % | 78,8 | 81,0 | 81,0 | 80,2 | 79,8 | 79,1 | 81,1 | 81,0 | 80,2 | 79,8 | 79,4 | 81,4 | 81,3 | 80,5 | 80,1 | 79,4 | 81,4 | 81,3 | 80,5 | 80,2 |
| NPE32 VL4 C | % | 81,0 | 83,7 | 83,3 | 82,2 | 81,8 | 81,2 | 83,8 | 83,3 | 82,2 | 81,9 | 81,4 | 84,0 | 83,6 | 82,5 | 82,1 | 81,6 | 84,2 | 83,7 | 82,6 | 82,2 |

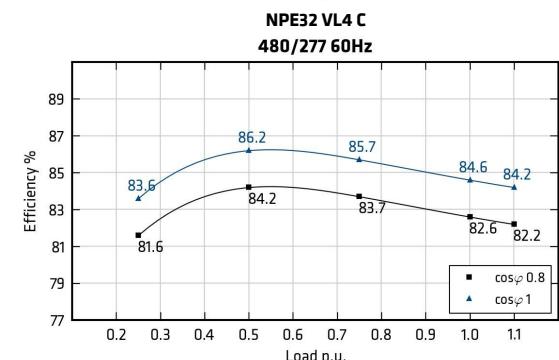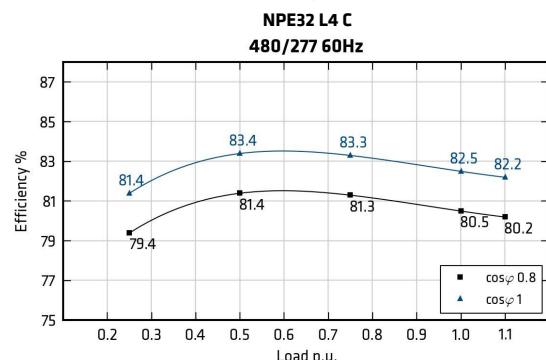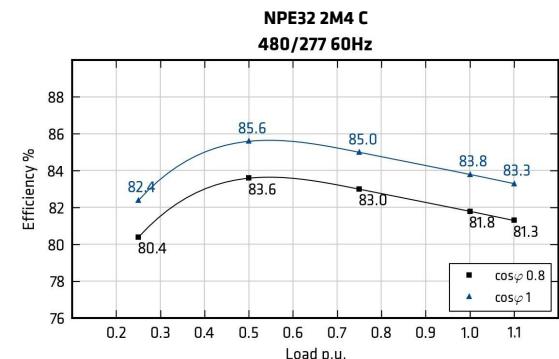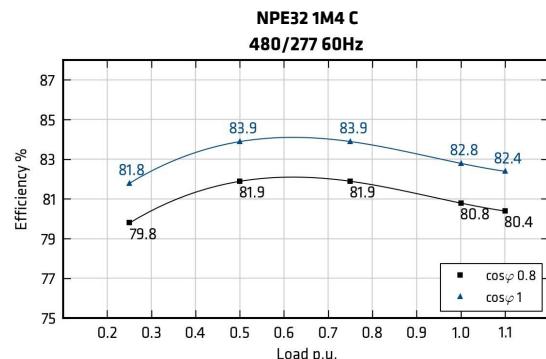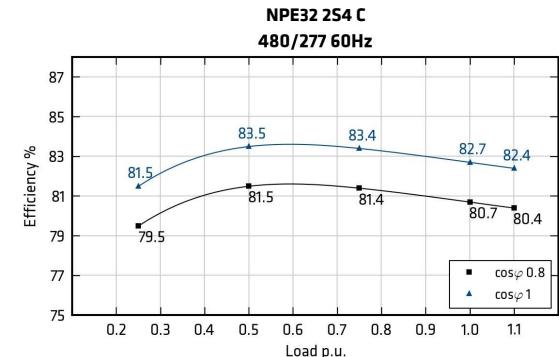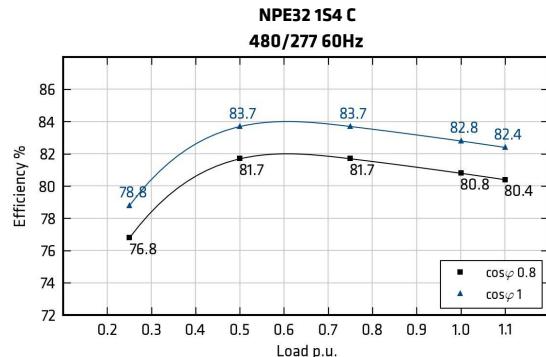

Transients voltage

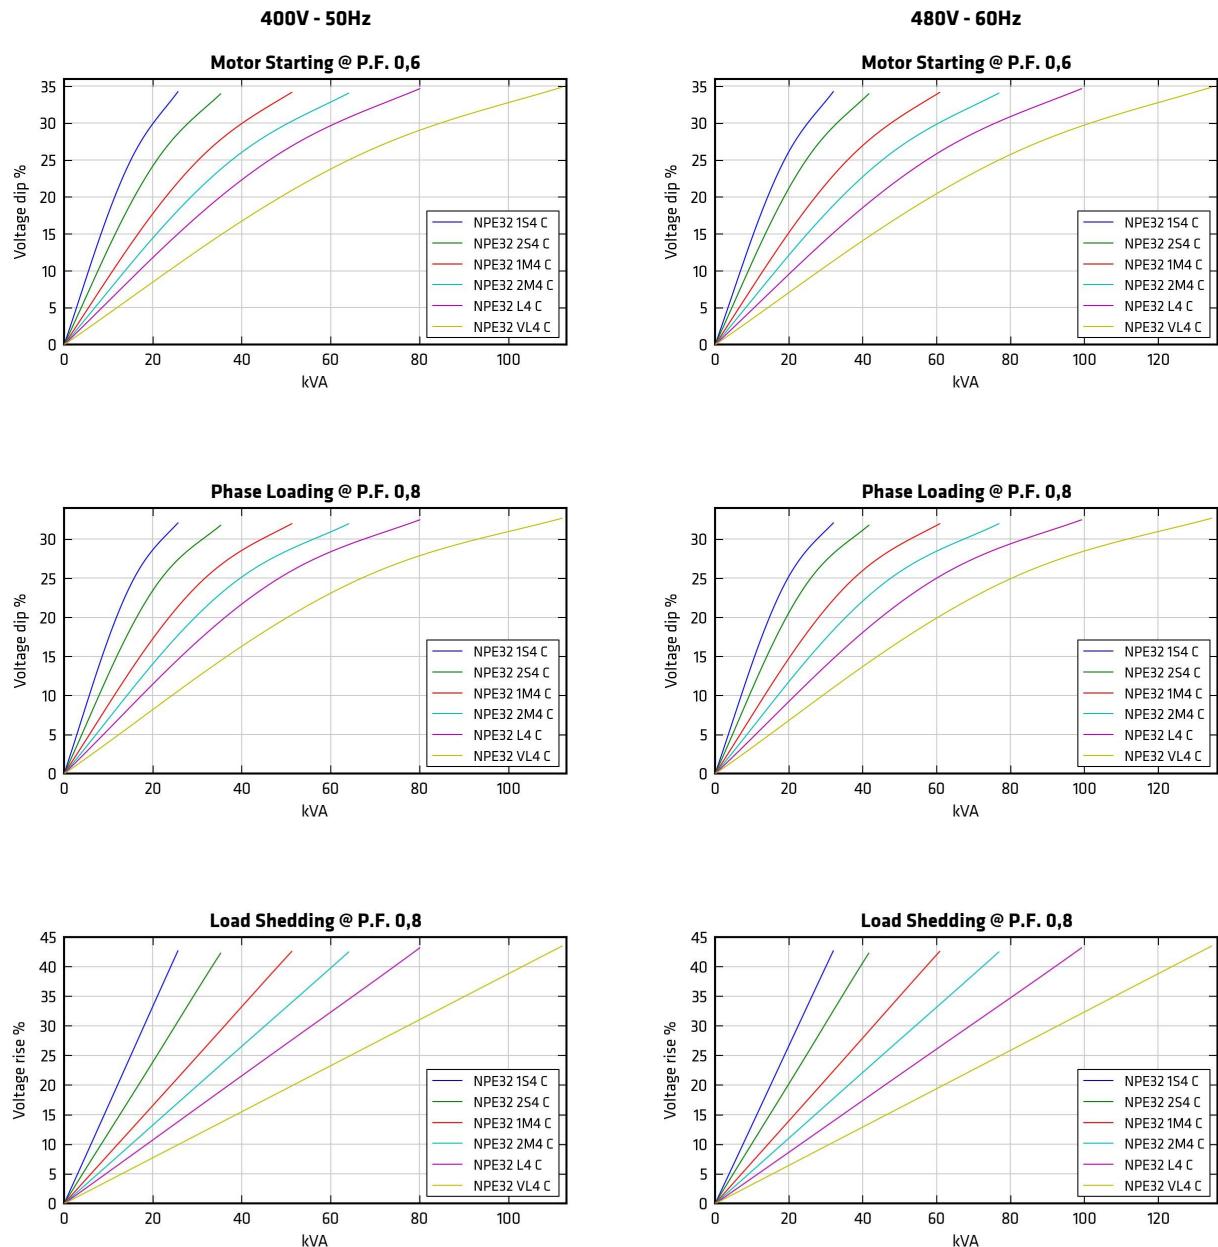

In order to scale transient curves as a function of a power factor or voltage if not indicated, please proceed as follows:

Power Factor coefficient corrector (PFCC), to be used on power factor 0.6 curves:

$$\text{PFCC} = \sin(\text{ARCcos(PFnew)})/0.8$$

Example. The PFCC at power factor 0.3 is 1.192 [$\text{PFCC} = \sin(\text{ARCcos}(0.3))/0.8$]. This means that the voltage fall at a given power at pf 0.3 is equivalent to the one that can be read on the pf 0.6 curve if the load is considered 1.192 times bigger (19% higher value.).

In this example, a 100 kVA load insertion at pf 0.3 is equivalent in voltage fall to a 119kVA load insertion at pf 0.6.

Voltage coefficient corrector (VCC):


$$\text{VCC} = (400/\text{Vnew})^2 \text{ if } 50 \text{ Hz; } \text{VCC} = (480/\text{Vnew})^2 \text{ if } 60 \text{ Hz}$$

Example. VCC at 415V 60 Hz is 1.338 [$\text{VCC} = (480/415)^2$]. This means that the voltage fall at a given power at 415V is equivalent to the one that can be read on the power factor 0.6 curve if the load is considered 1.338 times bigger (33% higher value.).


In this example, a 100 kVA load insertion at 415V is equivalent in voltage fall to a 133kVA load insertion at 480V.

50Hz Short circuit decrement curves - No load excitation at rated speed


NPE32 1S4 C

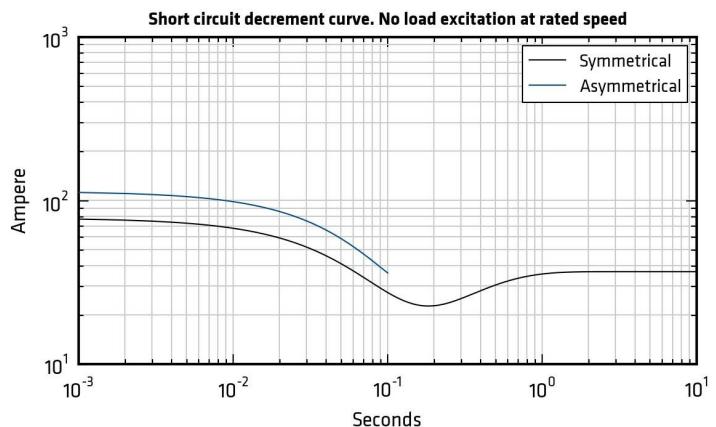


NPE32 2S4 C

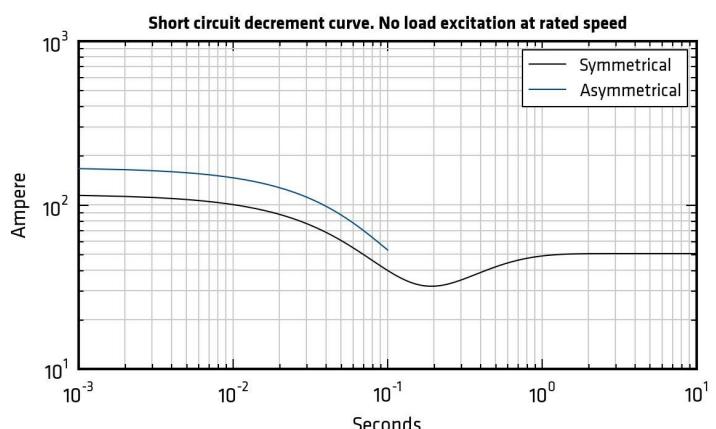

NPE32 1M4 C

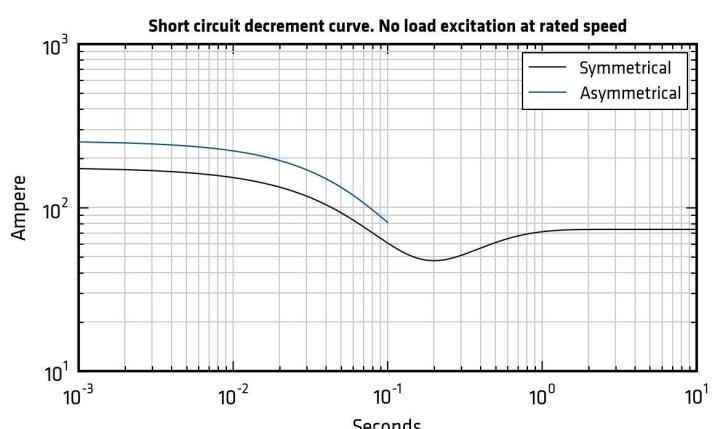


NPE32 2M4 C

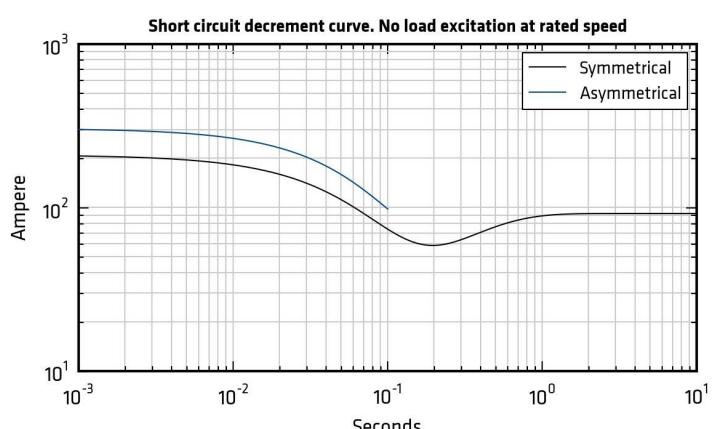


*Please refer to tables at page 6

50Hz Short circuit decrement curves - No load excitation at rated speed

NPE32 L4 C

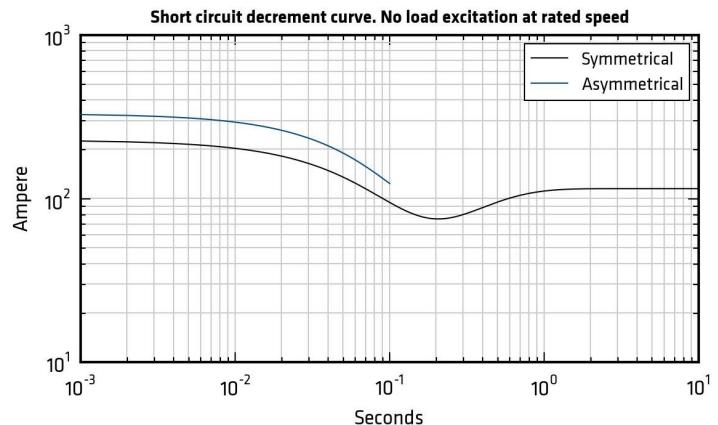


NPE32 VL4 C

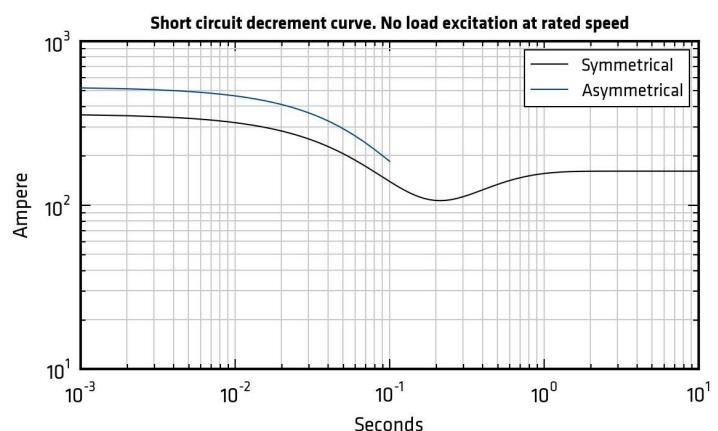


*Please refer to tables at page 6

60Hz Short circuit decrement curves - No load excitation at rated speed


NPE32 1S4 C

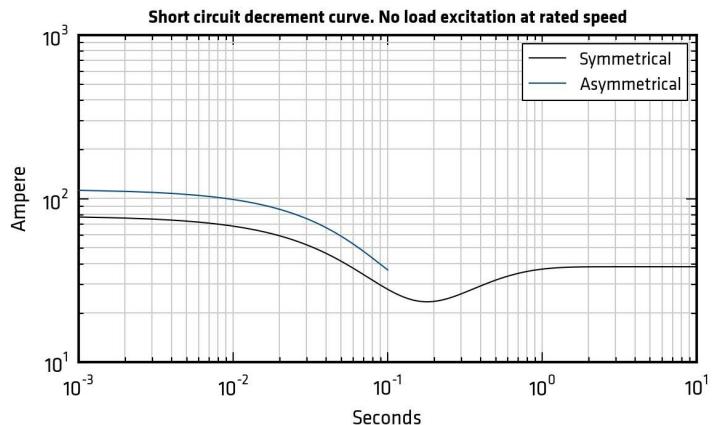


NPE32 2S4 C

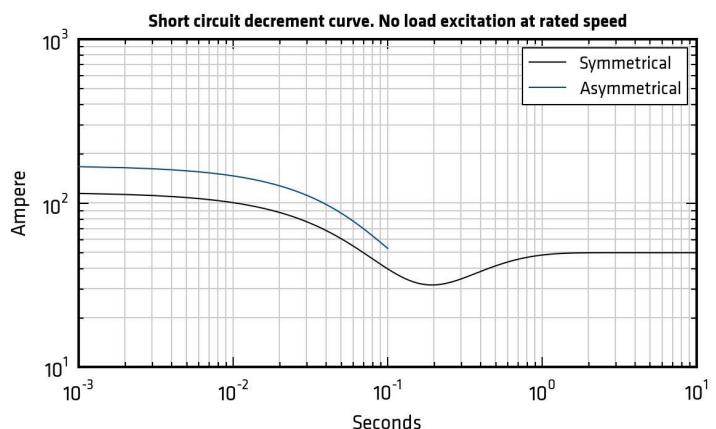

NPE32 1M4 C

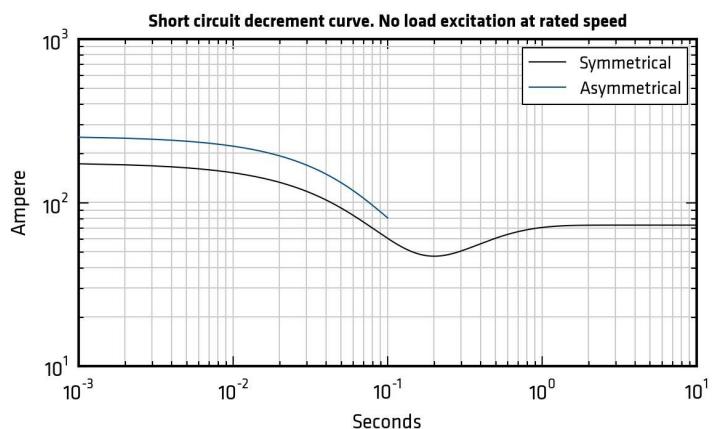


NPE32 2M4 C

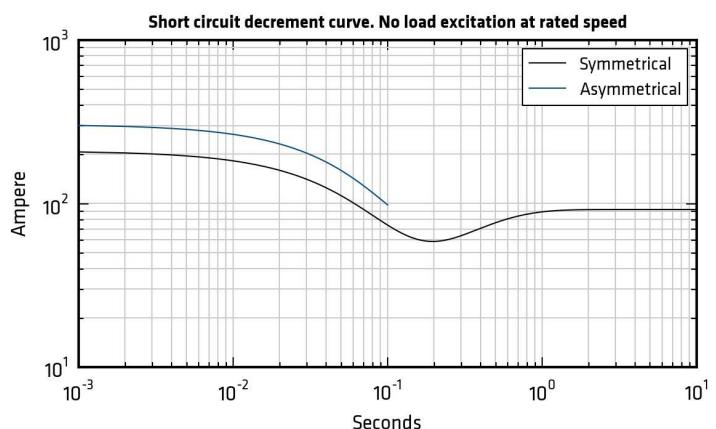


*Please refer to tables at page 6

60Hz Short circuit decrement curves - No load excitation at rated speed

NPE32 L4 C

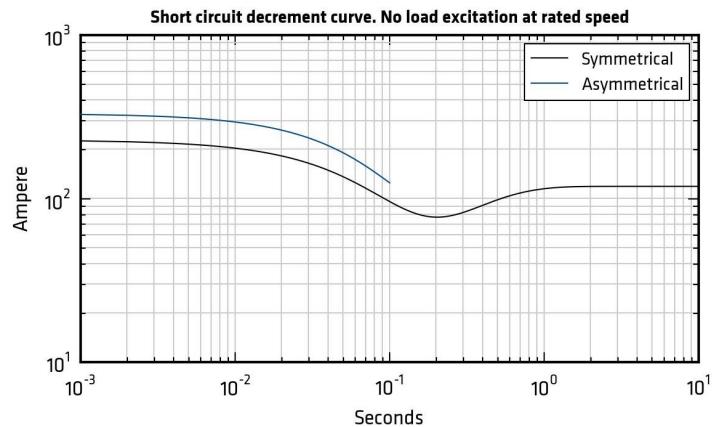

NPE32 VL4 C

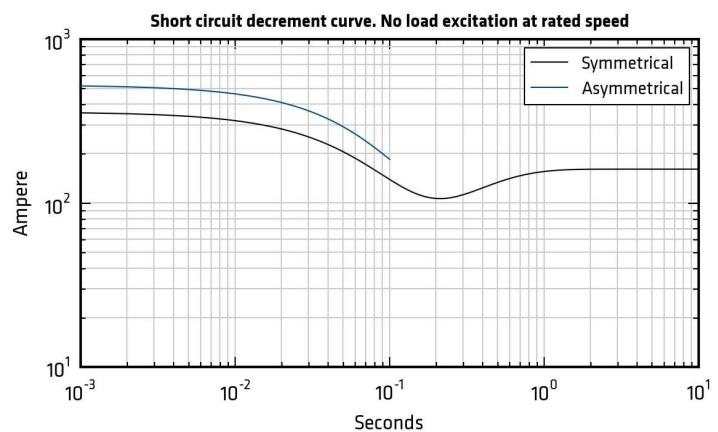


*Please refer to tables at page 6



Additional Characteristics

| Data | NPE32 1S4 C | | NPE32 2S4 C | | NPE32 1M4 C | | NPE32 2M4 C | | NPE32 L4 C | | NPE32 VL4 C | |
|----------------------------------|-------------|-------|-------------|-------|-------------|-------|-------------|-------|------------|-------|-------------|-------|
| | 50Hz | 60Hz | 50Hz | 60Hz | 50Hz | 60Hz | 50Hz | 60Hz | 50Hz | 60Hz | 50Hz | 60Hz |
| Damper cage | Copper | | | | | | | | | | | |
| Stator Winding Resistance (20°C) | Ω | 1,17 | | 0,73 | | 0,295 | | 0,18 | | 0,15 | | 0,11 |
| Rotor Winding Resistance (20°C) | Ω | 0,662 | | 0,707 | | 0,798 | | 0,889 | | 0,957 | | 1,139 |
| Stator Exciter Resistance (20°C) | Ω | 11,05 | | 11,05 | | 11,05 | | 11,05 | | 11,05 | | 11,05 |
| Rotor Exciter Resistance (20°C) | Ω | 0,32 | | 0,32 | | 0,32 | | 0,32 | | 0,32 | | 0,32 |
| Weight of complete generator | kg | 77,0 | | 83,0 | | 98,0 | | 109,0 | | 120,0 | | 145,0 |
| Unbalanced magnetic pull | kN/mm | 3,8 | | 3,8 | | 3,9 | | 3,9 | | 4,2 | | 4,5 |
| Air flow | m³/min | 9,3 | 12,0 | 9,3 | 12,0 | 9,3 | 12,0 | 9,3 | 12,0 | 9,3 | 12,0 | 9,3 |
| Noise level at 1m/7m | dB(A) | 64/54 | 67/58 | 64/54 | 67/58 | 64/54 | 67/58 | 64/54 | 67/58 | 64/54 | 67/58 | 64/54 |

PQ Diagram

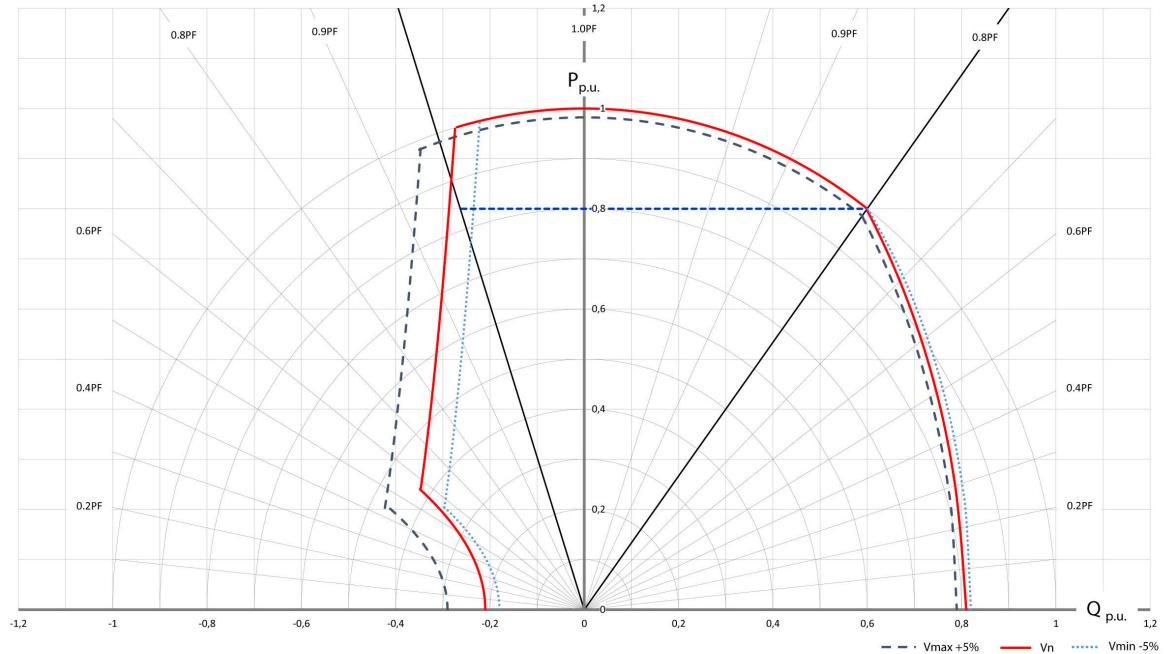


NPE32 1S4 C

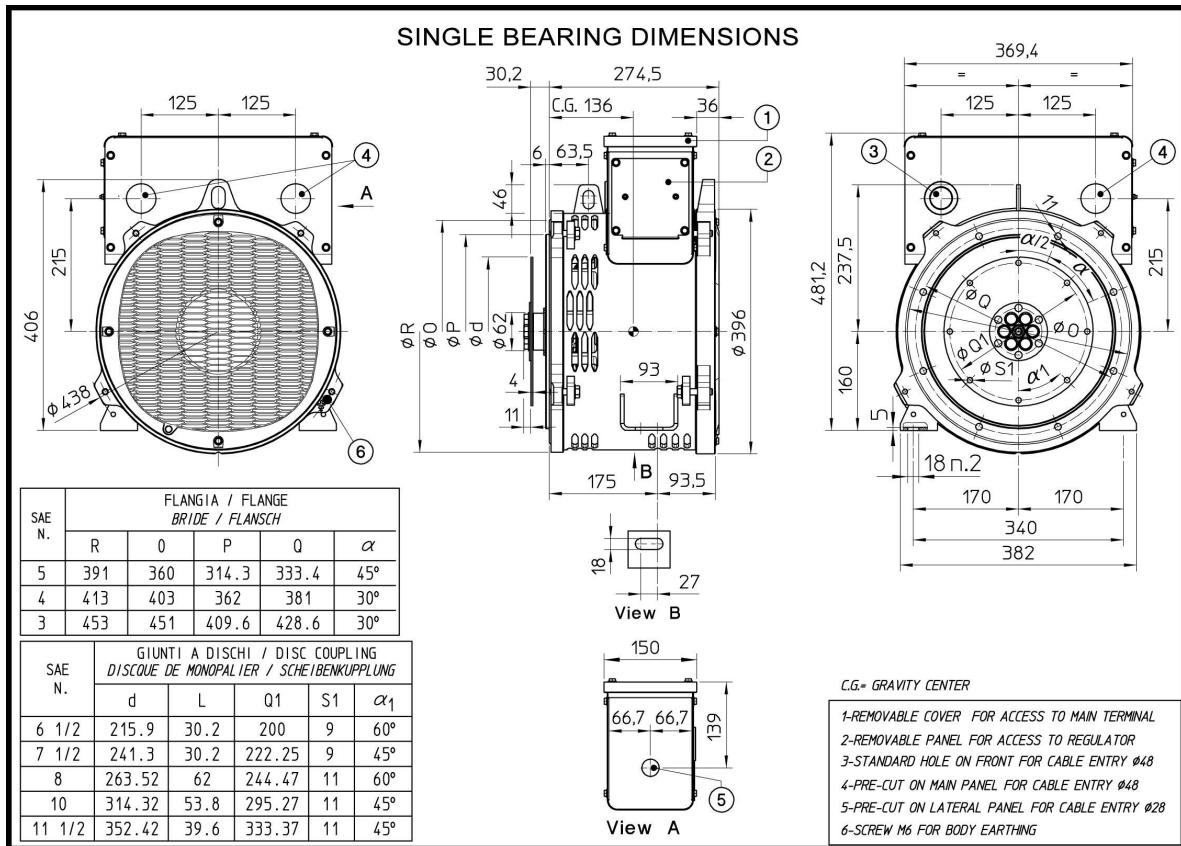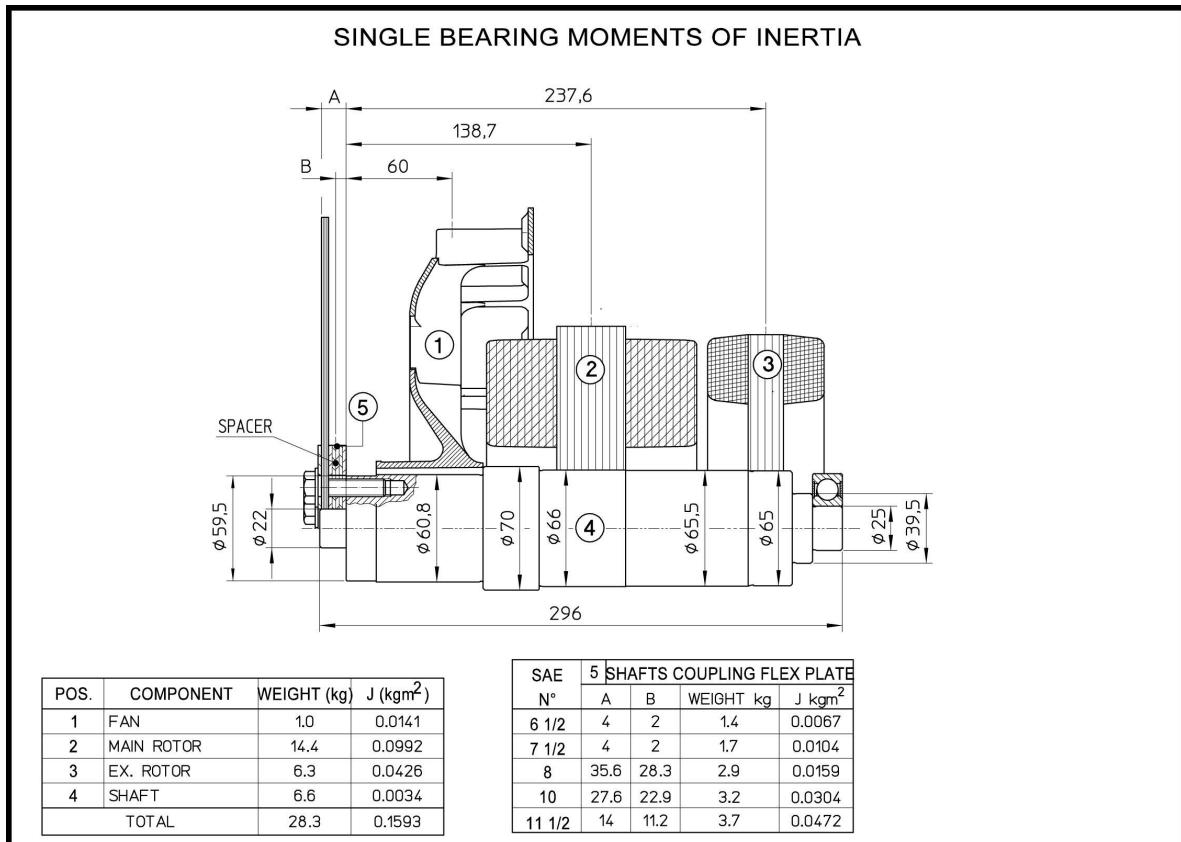

NPE32 2S4 C


SINGLE BEARING MOMENTS OF INERTIA

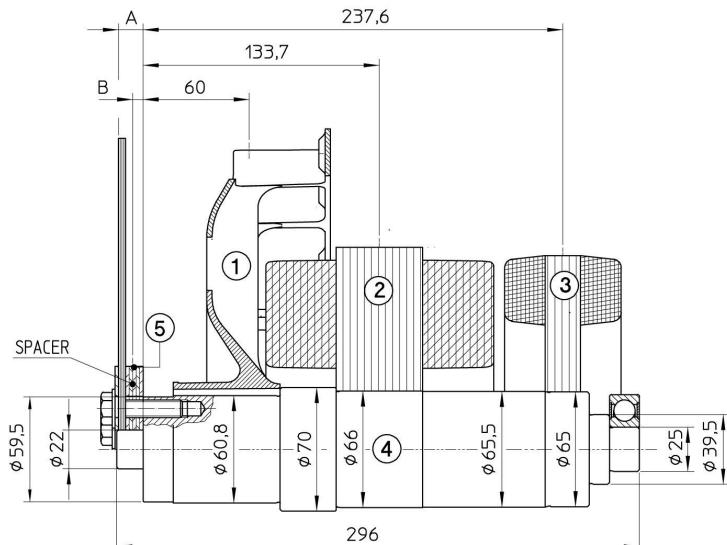



| POS. | COMPONENT | WEIGHT (kg) | J (kgm^2) |
|------|------------|-------------|----------------------|
| 1 | FAN | 1.0 | 0.0141 |
| 2 | MAIN ROTOR | 16.7 | 0.1141 |
| 3 | EX. ROTOR | 6.3 | 0.0426 |
| 4 | SHAFT | 6.6 | 0.0034 |
| | TOTAL | 30.6 | 0.1742 |

| SAE N° | 5 SHAFTS COUPLING FLEX PLATE | | | |
|-----------|------------------------------|------|-----------|--------------------|
| | A | B | WEIGHT kg | J kgm ² |
| 6 1/2 | 4 | 2 | 1.4 | 0.0067 |
| 7 1/2 | 4 | 2 | 1.7 | 0.0104 |
| 8 | 35.6 | 28.3 | 2.9 | 0.0159 |
| 10 | 27.6 | 22.9 | 3.2 | 0.0304 |
| 11 1/2 | 14 | 11.2 | 3.7 | 0.0472 |



SINGLE BEARING DIMENSIONS

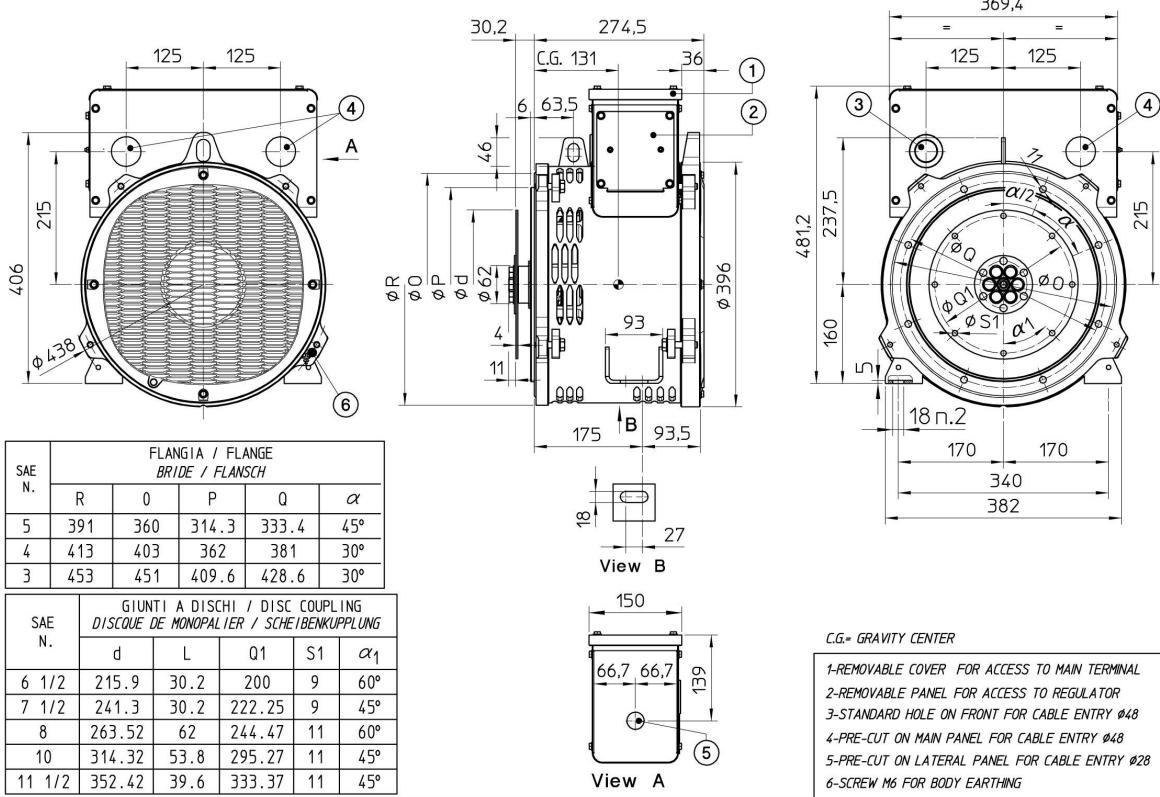



NPE32 1M4 C

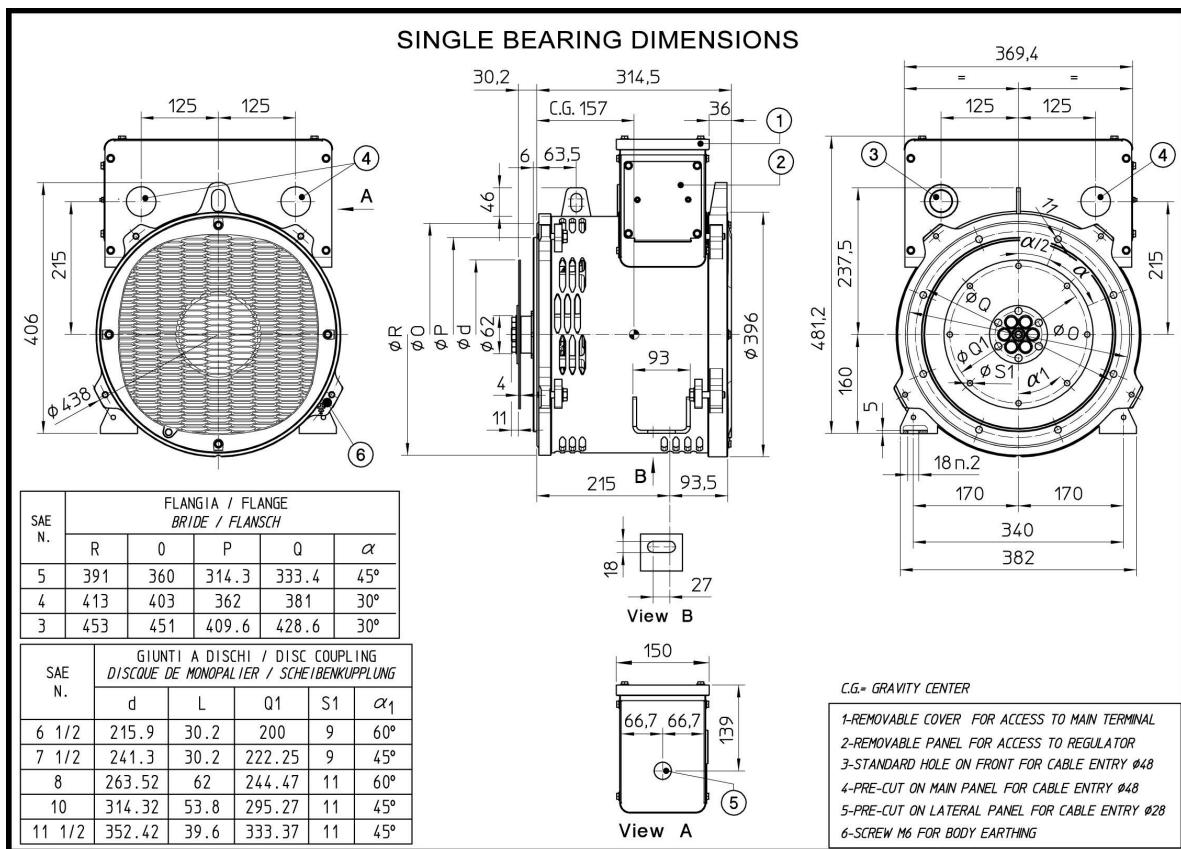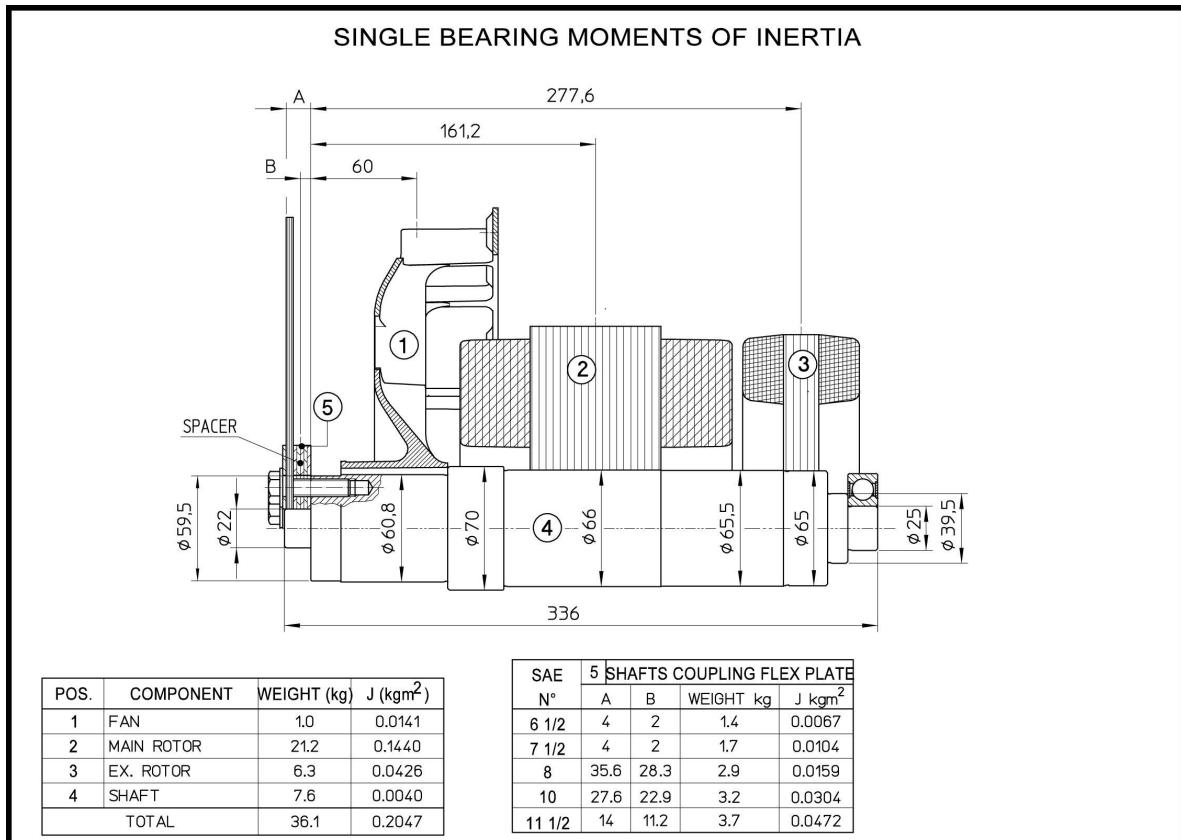



NPE32 2M4 C

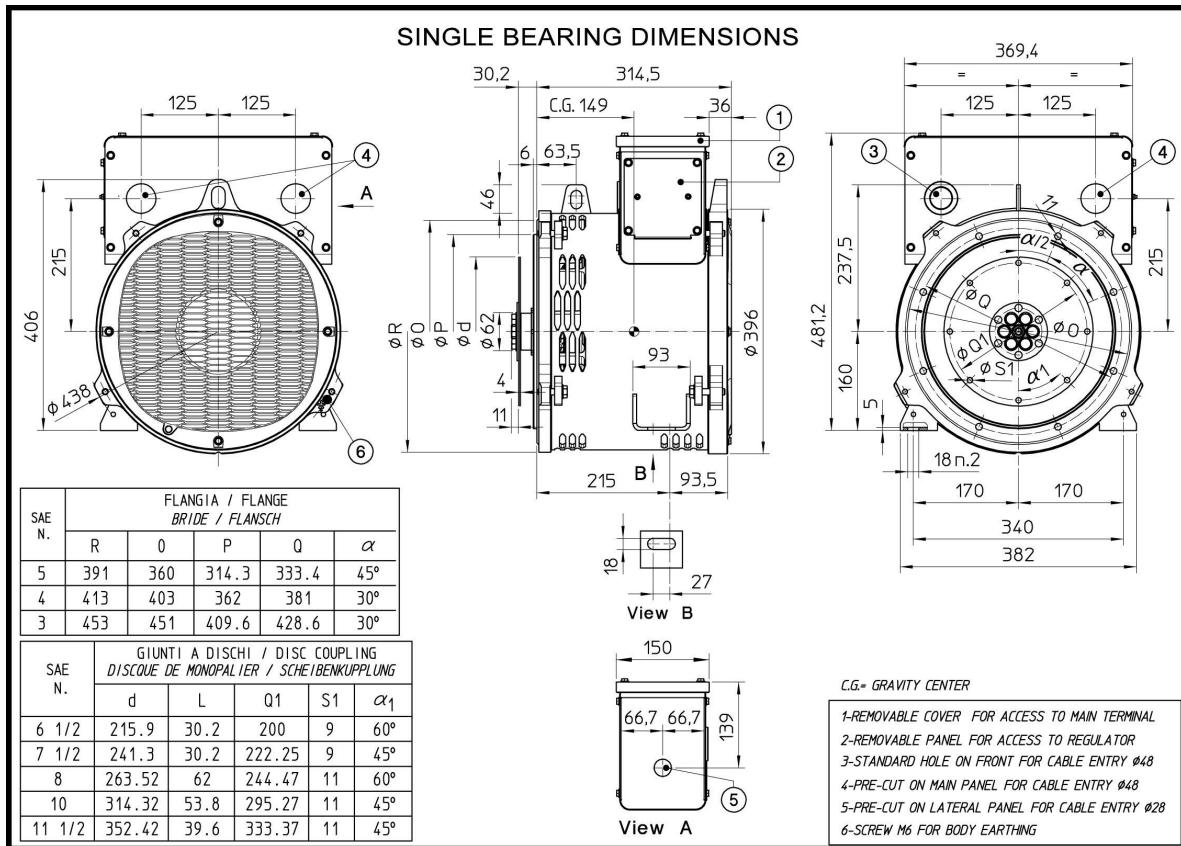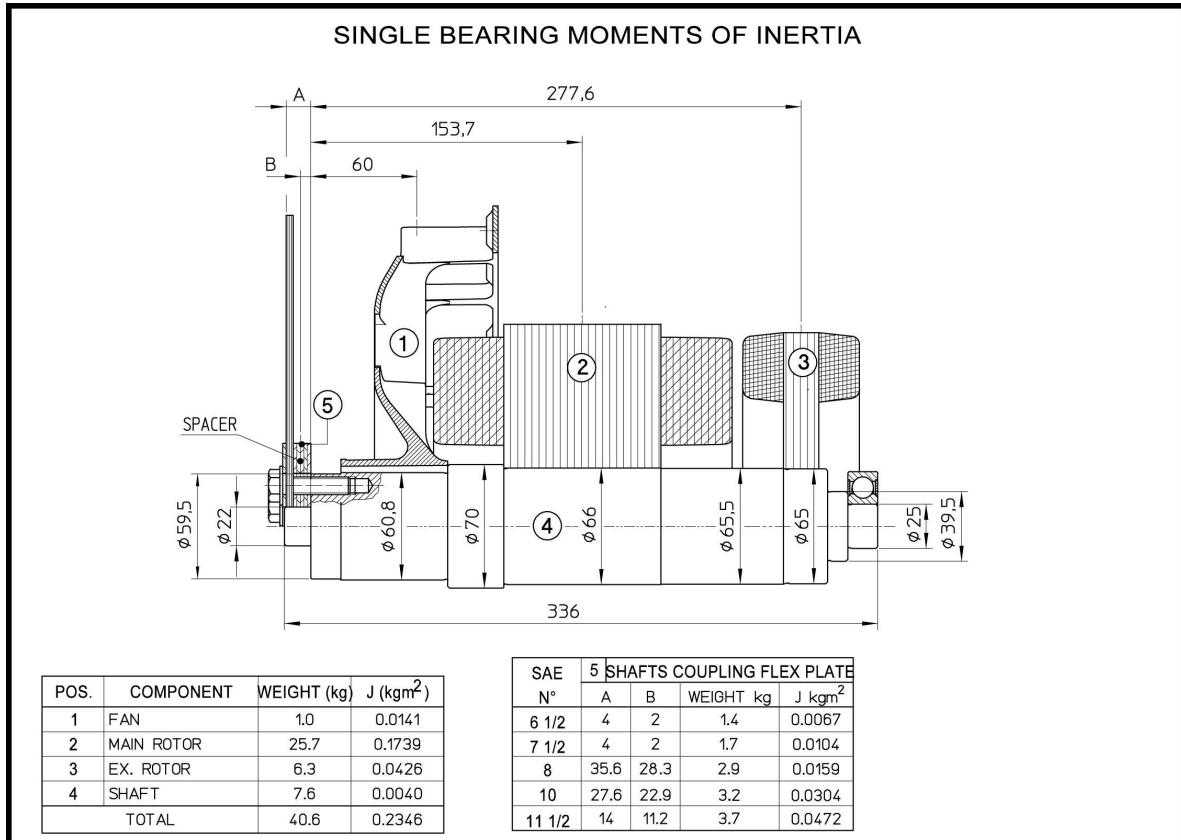

NPE32 L4 C

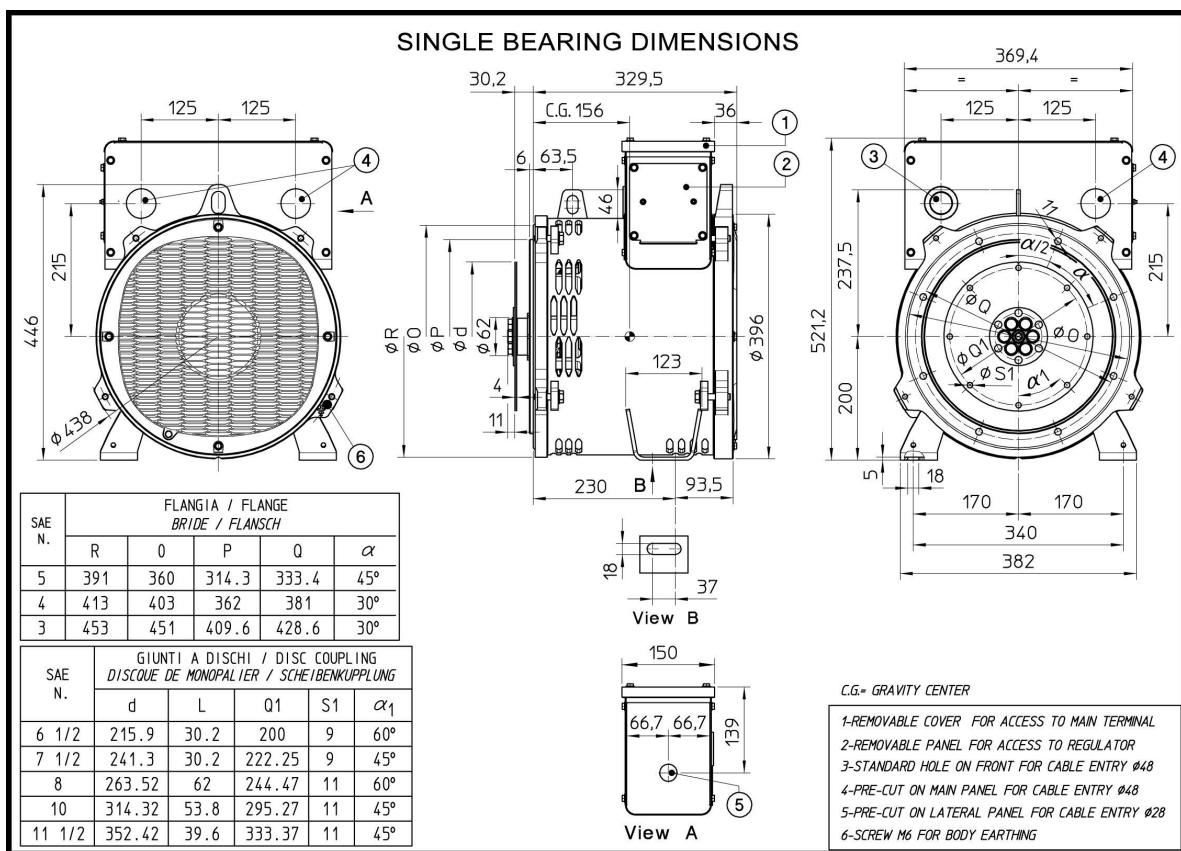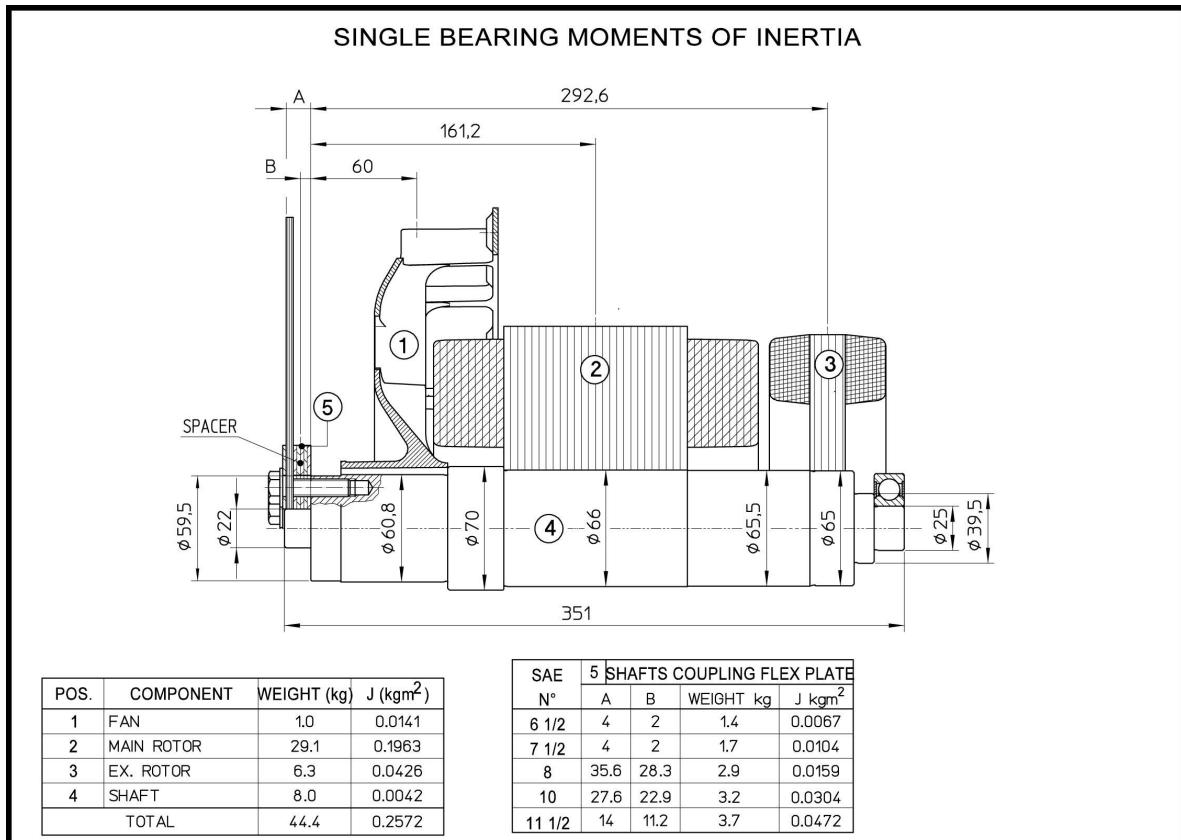

NPE32 VL4 C

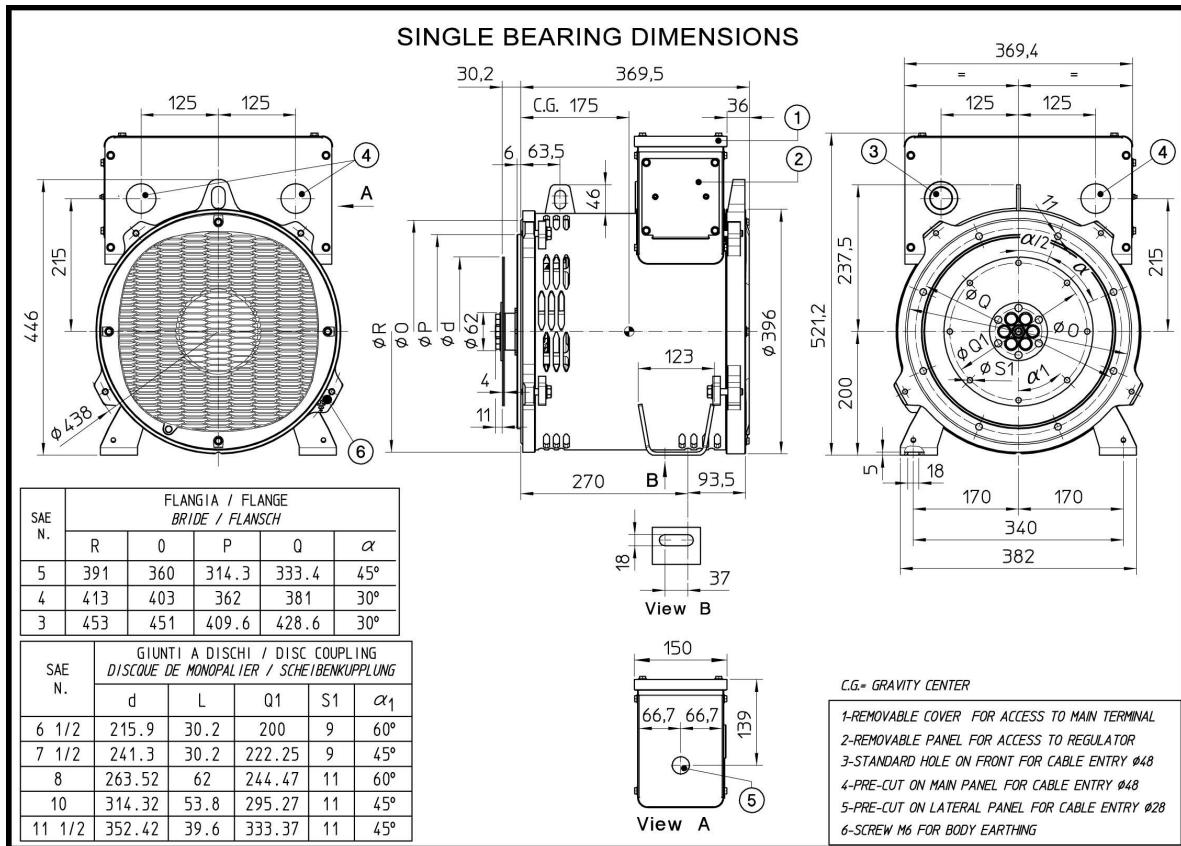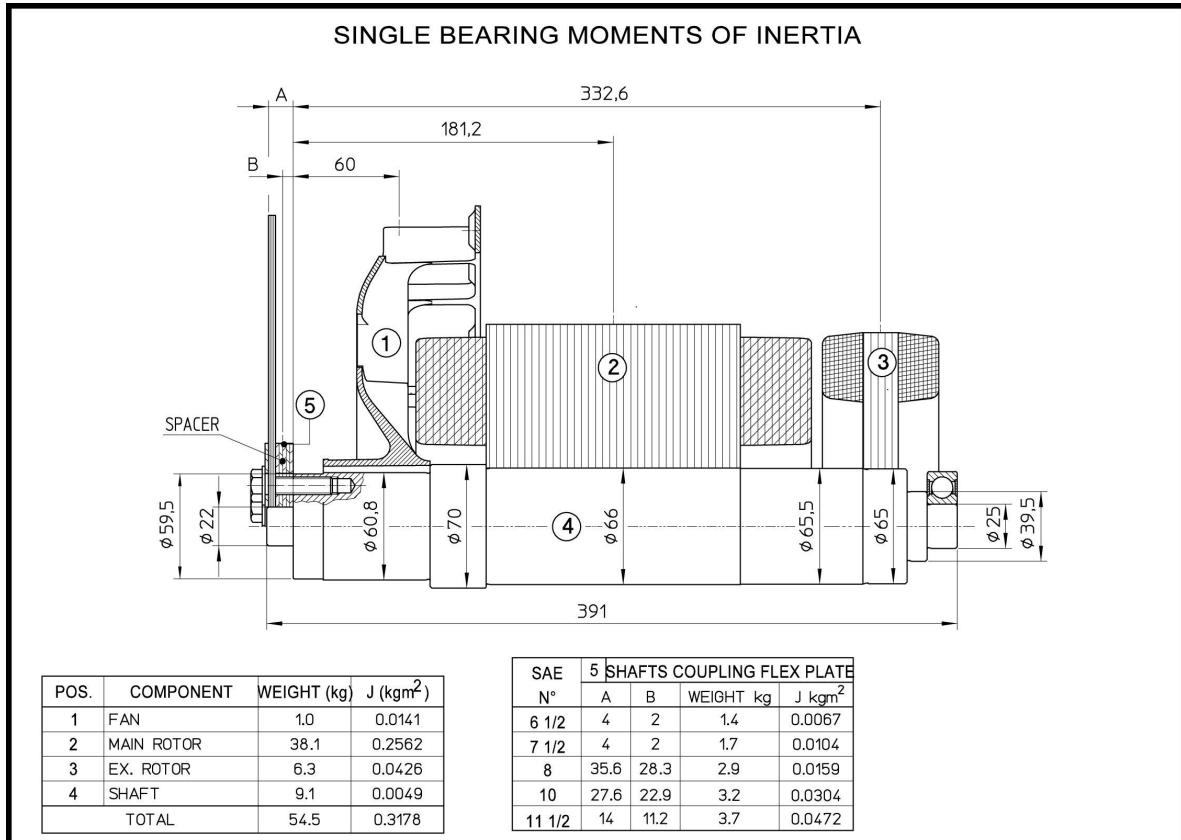

Notes

Mecc Alte SpA (HQ)

Via Roma
20 – 36051 Creazzo
Vicenza – ITALY
T: +39 0444 396111
E: info@meccalte.it
aftersales@meccalte.it

Mecc Alte Portable

Via Roma
20 – 36051 Creazzo
Vicenza – ITALY
T: +39 0444 396111
E: info@meccalte.it

Mecc Alte Power Products srl

Via Melaro
2 – 36075 Montecchio
Maggiore (VI) – ITALY
T: +39 0444 1831295
E: info@meccalte.it

Zanardi Alternatori srl

Via Dei Laghi
48/B – 36077 Altavilla
Vicenza – ITALY
T: +39 0444 370799
E: info@zanardialternatori.it

United Kingdom

Mecc Alte U.K. LTD
6 Lands' End Way
Oakham
Rutland LE15 6RF
T: +44 (0) 1572 771160
E: info@meccalte.co.uk

Spain

Mecc Alte España S.A.
C/ Rio Taibilla, 2
Polig. Ind. Los Valeros
03178 Benijofar (Alicante)
T: +34 (0) 96 6702152
E: info@meccalte.es

China

Mecc Alte Alternator Haimen LTD
755 Nanhai East Rd
Jiangsu HEDZ 226100 PRC
T: +86 (0) 513 82325758
E: info@meccalte.cn

India

Mecc Alte India PVT LTD
Plot NO:1, Sanaswadi
Talegaon
Dhamdhare Road Taluka:
Shirur, District:
Pune - 412208
Maharashtra, India
T: +91 2137 619600
E: info@meccalte.in

U.S.A. and Canada

Mecc Alte Inc.
1229 Adams Drive
McHenry, IL, 60051
T: +1 815 344 0530
E: info@meccalte.us

Germany

Mecc Alte Generatoren GmbH
Bucher Hang 2
D-87448 Waltenhofen
T: +49 (0)831 540755 0
E: info@meccalte.de

Australia

Mecc Alte Alternators PTY LTD
10 Duncan Road, PO Box 1046
Dry Creek, 5094, South
Australia
T: +61 (0) 8 8349 8422
E: info@meccalte.com.au

France

Mecc Alte International S.A.
Z.E.La Gagnerie
16330 ST.Amant de Boixe
T: +33 (0) 545 397562
E: info@meccalte.fr

Far East

Mecc Alte (F.E.) PTE LTD
19 Kian Teck Drive
Singapore 628836
T: +65 62 657122
E: info@meccalte.com.sg



www.meccalte.com