



Totally Focused. Totally Independent.

Technical Guide

---

# ECP34 4 A



The world's largest  
independent producer of  
alternators 1 – 5,000kVA





## Standards

Alternators are designed and produced within an ISO 9001 environment. The entire series is manufactured according to, and complies with, the most common specifications such as CEI 2-3, IEC 34-1, EN 60034-1, VDE 0530, BS 4999-5000, NF 51.111, CAN/CSA-C22.2 No14-95-No100-95, NEMA MG 1-2011, ISO 8528-3. Other standards such as UL1446, UL 1004/4 and /B are available on request.

## Windings and Performances

All windings are 2/3rds pitch to eliminate triplen harmonics within the voltage waveform and to avoid excessive neutral currents in certain parallel operating conditions. A fully interconnected aluminium or copper damper cage is supplied on the rotor of all models (excluding the ECP3 series).


- ▶ 12 wire reconnectable:
  - 50Hz – 380V to 440V and 220/110V to 240/120V (de-rates may apply at certain voltages)
  - 60Hz – 380V to 480V and 220/110V to 240/120V (de-rates may apply at certain voltages)
  
- ▶ 6 wire reconnectable:
  - 50Hz – 380V to 440V and 220V to 240V (de-rates may apply at certain voltages)
  - 60Hz – 380V to 480V and 220V to 240V (de-rates may apply at certain voltages)

| Winding Configurations          | Standard  |                               | Special (dedicated)           |                               |                               |                               |
|---------------------------------|---|-------------------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|
|                                 | 12 wire Reconnectable   | 6 wire Reconnectable          | 380V and 600V 60Hz            | 690V 50/60Hz                  | 220-240V 1ph 50Hz             | 220-240V 1ph 60Hz             |
| ECP3 to ECO38                   | Std   | Option                        | Option                        | Option                        | Option                        | Option                        |
| ECO40 to ECO46                  | Std   | Option                        | Option                        | Option                        | Option (to ECO40)             | Option (to ECO40)             |
| Insulation materials            | Class H   | Class H                       | Class H                       | Class H                       | Class H                       | Class H                       |
| High efficiency                 | Std   | Std                           | Std                           | Std                           | Std                           | Std                           |
| High motor starting             | >300%   | >300%                         | >300%                         | >300%                         | >300%                         | >300%                         |
| THD (Total Harmonic Distortion) | Typically <3.5% full load L-L   | Typically <3.0% full load L-L | Typically <3.5% full load L-L | Typically <3.5% full load L-L | Typically <4.5% full load L-N | Typically <4.5% full load L-N |
| Interference suppression        | VDE 0875 G/N/K, EN61000-6-3, EN61000-6-2, others available on request |                               |                               |                               |                               |                               |

## Winding Protection

There are various degrees of protection for the windings following the standard impregnation process, as can be seen here. The TOTAL+ butadienic black flexible coating is recommended for arduous applications.

| Winding Protection:   | STANDARD | STANDARD+ | GREY   | GREY+  | TOTAL+ |
|-----------------------|----------|-----------|--------|--------|--------|
| ECP3                  | Std      | Option    | Option | Option | Option |
| ECP28 and ECP32       | -        | Std       | Option | Option | Option |
| NPE32, ECP34 to ECO46 | -        | -         | Std    | Option | Option |

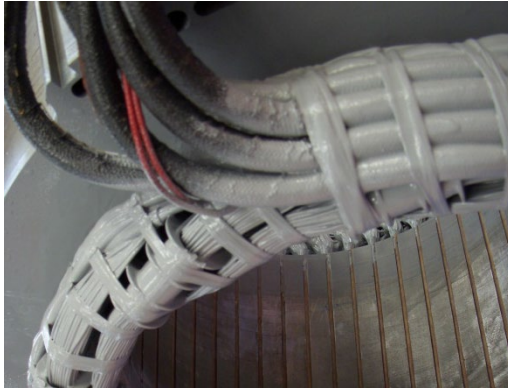


Grey treatment (marinization) on the left, TOTAL+ treatment shown on the right. The EG43 grey varnish, is an high temperature insulating enamel that forms a tough and flexible film, with excellent moisture and chemical protection. It is water and oil proof, and also protects windings from abrasion. It is applied spraying an over coating layer over the impregnated winding, or dipping the stator in a varnish barrel for superior treatments

The TOTAL+ is a protection system that makes Mecc Alte special. It is the ultimate winding treatment that offers truly superior performances when the environment is really harsh, or the application very demanding. The TOTAL+ is also extremely resistant to the particle abrasion as it adsorbs the impacts.

## Protection for Environment

In addition to protection on the windings themselves, the alternators can have increased ingress protection. Standard levels are IP23 with further upgrades available to include inlet filters, IP43 and IP45: 7% de-rates apply on inlet filters and IP43 protection. 20-30% de-rates apply for IP45 depending on alternator model.

Additional air exit louvres (called IP23+) are optionably retrofittable in the overall ECP32 to ECO 46 range, in order to comply to the most strict marine regulations.

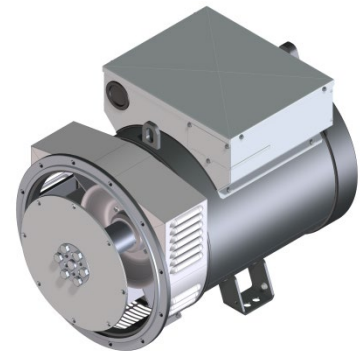


## Construction

The robust mechanical structure withstands up to 5G in any direction and 9G vertically and its design permits easy access to the connections and components during routine maintenance check-ups. The mechanical design has used the most advanced FEM techniques. The materials used are: FEP12 steel for the frame, C45 steel for the shaft and cast iron or aluminum pressure die cast for the end-brackets: fans are aluminum die casted either nylon fiber glass loaded, UL compliant materials. Rotors are dynamically balanced according grade 2.5 of ISO 1940-1.



## Terminals and Terminal Box

Easy access to regulators is assured through a pull out drawer or a drop down panel to allow safer adjustment. Large terminal boxes allow easy access of power cables, in the ECO43 and ECO46 higher power ranges the terminal allow the convenient choice of power cable or busbar connection with versatility of entry and connection. Current transformers are available as an option on series ECO 40, 43 and 46 with single or dual output.

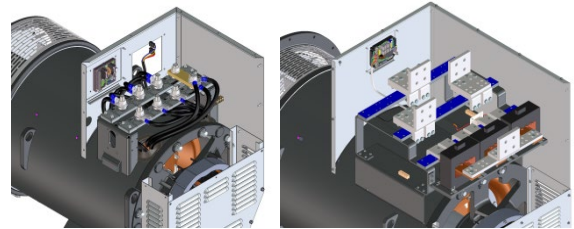

## Excitation and Regulation Systems

All ECP/ECO series have MAUX auxiliary winding to power the digital regulator. Both DSR and the DER1 are available to connect to PC through the DxR2 USB interface and DxR TERMINAL software to interrogate/download alarms & settings for analysis or for cloning other regulators. DER2 has got an integrated USB connection and can be connected to the PC without any optional connection boards. More settings such as LAMS, digital RAM based synchronous external control and soft start are obtainable through the DxR connection. Simple analogue potentiometers are available for the more usual adjustments.


| Excitation Systems                     | DSR   | DER1    | DER2    |
|--|-------|---------|---------|
| ECP3 to ECO38                          | Std   | Option  | Option  |
| ECO40 to ECO46                         | -     | Std     | Option  |
| Parallel Operation                     | √     | √       | √       |
| Mains Parallel                         | √     | √       | √       |
| 3 Phase Sensing (rms)                  | -     | √       | √       |
| Accuracy                               | +/-1% | +/-0.5% | +/-0.5% |
| Remote Voltage Control                 | √     | √       | √       |
| Alarm Log                              | √     | √       | √       |
| Analogue and Digital Configurable      | √     | √       | √       |
| LAMS (Load Acceptance V/f)             | √     | √       | √       |
| APO (Active Protection Output)         | √     | √       | √       |
| Soft Start                             | √     | √       | √       |
| High dynamic response                  | -     | -       | √       |
| USB connection without external boards | -     | -       | √       |

For a given motor start duty a smaller machine may be selected – also enhanced by low sub-transient reactance values for non-linear loads. The whole range from 6.5 to 3400kVA is capable of >300% sustained short circuit current for up to 20 seconds.

## Optional PMG3

PMG3 can be retro fit or factory fit on ECO 40, 43 and 46 series. This smart MeccAlte design allows an easy fix kit, through a tapered cone coupling and a simple replacement of the rear air louvre. PMG3 is also available on ECO 38, when ordered from the factory.

The complete AVR range is fully compatible with both MAUX and PMG3 systems, this minimises spare part management and flexibility of stock as one AVR suits all applications. The PMG3 is delivering the same amount of kVA available with the MAUX.



## Accessories

Additional optionals can be fit on our alternator series, such as PTC thermistors or PT100 both on windings and bearings, space heaters, high and low profile of terminal boxes (on most series), air filter clogging sensors, rotating diode bridge failure sensor (RBD), power factor controller for parallel operation (PFR/2), parallel devices (standard from ECO 40), air filters, IP43 and IP45 protections, marine IP23 + protection for SOLAS requirements and many others.

## Deration coefficients

| Altitude (meters)  | Ambient temperature (Celsius) |      |      |      |      |      |
|--------------------|-------------------------------|------|------|------|------|------|
|                    | 25                            | 40   | 45   | 50   | 55   | 60   |
| $\leq 1000$        | 1.07                          | 1    | 0.96 | 0.93 | 0.91 | 0.89 |
| $> 1000 \leq 1500$ | 1.01                          | 0.96 | 0.92 | 0.89 | 0.87 | 0.84 |
| $> 1500 \leq 2000$ | 0.96                          | 0.91 | 0.87 | 0.84 | 0.83 | 0.79 |
| $> 2000 \leq 3000$ | 0.9                           | 0.85 | 0.81 | 0.78 | 0.76 | 0.73 |

## Notes on short circuit curves

The indicated coefficients have to be used to correct the three phase short circuit curves values as a function of the rated voltage.

The indicated coefficient have to be used to correct the three phase short circuit curves values as a function of the type of short circuit voltage.

| 50 Hz   |        | 60 Hz   |        |
|---------|--------|---------|--------|
| Voltage | Factor | Voltage | Factor |
| 380     | 0.93X  | 415     | 0.85X  |
| 400     | 1X     | 440     | 0.90X  |
| 415     | 1.04X  | 460     | 0.95X  |
| 440     | 1.10X  | 480     | 1X     |

|                     | 3 phase | 2 phase L-L | 1 phase L-N |
|---------------------|---------|-------------|-------------|
| <i>Istantaneous</i> | 1X      | 0.87X       | 1.30X       |
| <i>Minimum</i>      | 1X      | 1.80X       | 3.20X       |
| <i>Sustained</i>    | 1X      | 1.50X       | 2.50X       |
| <i>Max Duration</i> | 20 sec. | 10 sec.     | 4 sec.      |

All the curves are shown for series or parallel star connection at 400V 50 Hz or 480V 60 Hz. If the unit is reconnected from series to parallel star, the additional coefficient is 2X. From series star to series delta, it is 1.72X. From series star to parallel delta, it is 3.44X.

## General characteristics

|                        |           |                   |           |
|------------------------|-----------|-------------------|-----------|
| Pole number            | 4         | Insulation class  | H         |
| Phase number           | 3         | Protection class  | IP23      |
| Number of wires        | 12        | NDE Bearing type  | 6311.2RS  |
| Execution              | Brushless | DE Bearing type   | 6314.2Z   |
| Regulator type         | DSR       | Maximum Overspeed | 2250      |
| Winding pitch          | 2/3       | Altitude          | 0-1000    |
| Code voltage reference | T0405S3   | Balancing         | ISO1940-1 |

## Ratings 50Hz

kVA / kW @ Temp. Rise / Ambient °C - 0.8 PF

|                    | STANDBY-163/27 |      |            |      | STANDBY-150/40 |      |            |      | H-125/40 |      |            |      | F-105/40 |      |             |      | B-80/40 |      |             |      |      |
|--------------------|----------------|------|------------|------|----------------|------|------------|------|----------|------|------------|------|----------|------|-------------|------|---------|------|-------------|------|------|
| Series             | 380V           | 400V | 415V       | 440V | 380V           | 400V | 415V       | 440V | 380V     | 400V | 415V       | 440V | 380V     | 400V | 415V        | 440V | 380V    | 400V | 415V        | 440V |      |
| Parallel Star YY   | 190V           | 200V | 208V       | 220V | 190V           | 200V | 208V       | 220V | 190V     | 200V | 208V       | 220V | 190V     | 200V | 208V        | 220V | 190V    | 200V | 208V        | 220V |      |
| Series Delta Δ     | 220V           | 230V | 240V       | 254V | 220V           | 230V | 240V       | 254V | 220V     | 230V | 240V       | 254V | 220V     | 230V | 240V        | 254V | 220V    | 230V | 240V        | 254V |      |
| Parallel Delta ΔΔ  | 110V           | 115V | 120V       | 127V | 110V           | 115V | 120V       | 127V | 110V     | 115V | 120V       | 127V | 110V     | 115V | 120V        | 127V | 110V    | 115V | 120V        | 127V |      |
| <b>ECP34 1S4 A</b> | <b>kVA</b>     | 95   | <b>95</b>  | 95   | 78             | 90   | <b>90</b>  | 90   | 75       | 85   | <b>85</b>  | 85   | 70       | 77   | <b>77</b>   | 77   | 63      | 68   | <b>68</b>   | 68   | 56   |
|                    | <b>kW</b>      | 76   | <b>76</b>  | 76   | 62             | 72   | <b>72</b>  | 72   | 60       | 68   | <b>68</b>  | 68   | 56       | 61,6 | <b>61,6</b> | 61,6 | 50,4    | 54,4 | <b>54,4</b> | 54,4 | 44,8 |
| <b>ECP34 2S4 A</b> | <b>kVA</b>     | 116  | <b>116</b> | 116  | 94             | 110  | <b>110</b> | 110  | 90       | 105  | <b>105</b> | 105  | 85       | 95   | <b>95</b>   | 95   | 77      | 84   | <b>84</b>   | 84   | 68   |
|                    | <b>kW</b>      | 93   | <b>93</b>  | 93   | 75             | 88   | <b>88</b>  | 88   | 72       | 84   | <b>84</b>  | 84   | 68       | 76   | <b>76</b>   | 76   | 61,6    | 67   | <b>67</b>   | 67   | 54   |
| <b>ECP34 1L4 A</b> | <b>kVA</b>     | 148  | <b>148</b> | 148  | 124            | 143  | <b>143</b> | 143  | 120      | 135  | <b>135</b> | 135  | 114      | 121  | <b>121</b>  | 121  | 103     | 108  | <b>108</b>  | 108  | 91   |
|                    | <b>kW</b>      | 118  | <b>118</b> | 118  | 99             | 114  | <b>114</b> | 114  | 96       | 108  | <b>108</b> | 108  | 91       | 97   | <b>97</b>   | 97   | 82      | 86   | <b>86</b>   | 86   | 73   |
| <b>ECP34 2L4 A</b> | <b>kVA</b>     | 164  | <b>164</b> | 164  | 136            | 158  | <b>158</b> | 158  | 131      | 150  | <b>150</b> | 150  | 125      | 136  | <b>136</b>  | 136  | 113     | 120  | <b>120</b>  | 120  | 100  |
|                    | <b>kW</b>      | 131  | <b>131</b> | 131  | 109            | 126  | <b>126</b> | 126  | 105      | 120  | <b>120</b> | 120  | 100      | 109  | <b>109</b>  | 109  | 90,4    | 96   | <b>96</b>   | 96   | 80   |
| <b>ECP34 3L4 A</b> | <b>kVA</b>     | 170  | <b>175</b> | 175  | 164            | 164  | <b>169</b> | 169  | 158      | 155  | <b>160</b> | 160  | 150      | 140  | <b>145</b>  | 145  | 135     | 124  | <b>128</b>  | 128  | 120  |
|                    | <b>kW</b>      | 136  | <b>140</b> | 140  | 131            | 131  | <b>135</b> | 135  | 126      | 124  | <b>128</b> | 128  | 120      | 112  | <b>116</b>  | 116  | 108     | 99   | <b>102</b>  | 102  | 96   |

## Ratings 60Hz

kVA / kW @ Temp. Rise / Ambient °C - 0.8 PF

|                    | STANDBY-163/27 |      |      |      | STANDBY-150/40 |      |      |      | H-125/40   |      |      |      | F-105/40    |      |      |      | B-80/40     |      |      |      |             |
|--------------------|----------------|------|------|------|----------------|------|------|------|------------|------|------|------|-------------|------|------|------|-------------|------|------|------|-------------|
| Series             | 415V           | 440V | 460V | 480V | 415V           | 440V | 460V | 480V | 415V       | 440V | 460V | 480V | 415V        | 440V | 460V | 480V | 415V        | 440V | 460V | 480V |             |
| Parallel Star YY   | 208V           | 220V | 230V | 240V | 208V           | 220V | 230V | 240V | 208V       | 220V | 230V | 240V | 208V        | 220V | 230V | 240V | 208V        | 220V | 230V | 240V |             |
| Series Delta Δ     | 240V           | 254V | 265V | 277V | 240V           | 254V | 265V | 277V | 240V       | 254V | 265V | 277V | 240V        | 254V | 265V | 277V | 240V        | 254V | 265V | 277V |             |
| Parallel Delta ΔΔ  | 120V           | 127V | 133V | 138V | 120V           | 127V | 133V | 138V | 120V       | 127V | 133V | 138V | 120V        | 127V | 133V | 138V | 120V        | 127V | 133V | 138V |             |
| <b>ECP34 1S4 A</b> | <b>kVA</b>     | 106  | 114  | 114  | <b>114</b>     | 101  | 108  | 108  | <b>108</b> | 95   | 102  | 102  | <b>102</b>  | 85,5 | 92   | 92   | <b>92</b>   | 76   | 81   | 81   | <b>81</b>   |
|                    | <b>kW</b>      | 85   | 91   | 91   | <b>91</b>      | 81   | 86   | 86   | <b>86</b>  | 76   | 82   | 82   | <b>81,6</b> | 68,4 | 73,6 | 73,6 | <b>73,6</b> | 60,8 | 64,8 | 64,8 | <b>64,8</b> |
| <b>ECP34 2S4 A</b> | <b>kVA</b>     | 127  | 139  | 139  | <b>139</b>     | 120  | 132  | 132  | <b>132</b> | 115  | 126  | 126  | <b>126</b>  | 104  | 114  | 114  | <b>114</b>  | 92   | 101  | 101  | <b>101</b>  |
|                    | <b>kW</b>      | 102  | 111  | 111  | <b>111</b>     | 96   | 106  | 106  | <b>106</b> | 92   | 101  | 101  | <b>101</b>  | 83,2 | 91,2 | 91,2 | <b>91,2</b> | 74   | 81   | 81   | <b>81</b>   |
| <b>ECP34 1L4 A</b> | <b>kVA</b>     | 153  | 165  | 178  | <b>178</b>     | 148  | 159  | 172  | <b>172</b> | 140  | 150  | 162  | <b>162</b>  | 125  | 135  | 146  | <b>146</b>  | 112  | 120  | 130  | <b>130</b>  |
|                    | <b>kW</b>      | 122  | 132  | 142  | <b>142</b>     | 118  | 127  | 138  | <b>138</b> | 112  | 120  | 130  | <b>130</b>  | 100  | 108  | 117  | <b>117</b>  | 90   | 96   | 104  | <b>104</b>  |
| <b>ECP34 2L4 A</b> | <b>kVA</b>     | 163  | 185  | 196  | <b>196</b>     | 158  | 178  | 189  | <b>189</b> | 150  | 170  | 180  | <b>180</b>  | 132  | 150  | 163  | <b>163</b>  | 120  | 136  | 144  | <b>144</b>  |
|                    | <b>kW</b>      | 130  | 148  | 157  | <b>157</b>     | 126  | 142  | 151  | <b>151</b> | 120  | 136  | 144  | <b>144</b>  | 106  | 120  | 130  | <b>130</b>  | 96   | 109  | 115  | <b>115</b>  |
| <b>ECP34 3L4 A</b> | <b>kVA</b>     | 180  | 202  | 210  | <b>210</b>     | 174  | 195  | 202  | <b>202</b> | 165  | 185  | 192  | <b>192</b>  | 150  | 160  | 173  | <b>173</b>  | 132  | 148  | 154  | <b>154</b>  |
|                    | <b>kW</b>      | 144  | 162  | 168  | <b>168</b>     | 139  | 156  | 162  | <b>162</b> | 132  | 148  | 154  | <b>154</b>  | 120  | 128  | 138  | <b>138</b>  | 106  | 118  | 123  | <b>123</b>  |



## Reactance & Time constants- Class H / 400V

| Unsaturated (ref. EN60034-4) |  |     | ECP34 1S4 A | ECP34 2S4 A | ECP34 1L4 A | ECP34 2L4 A | ECP34 3L4 A |
|------------------------------|--|-----|-------------|-------------|-------------|-------------|-------------|
| <b>X<sub>d</sub></b>         | Direct-axis synchronous reactance      | %   | 334,7       | 236,9       | 228,7       | 247,2       | 216,3       |
| <b>X'<sub>d</sub></b>        | Direct-axis transient reactance        | %   | 23          | 18,1        | 15,9        | 15,2        | 17,9        |
| <b>X''<sub>d</sub></b>       | Direct-axis subtransient reactance     | %   | 7,62        | 5,87        | 7,83        | 6,39        | 7,52        |
| <b>X<sub>q</sub></b>         | Quadrature-axis synchronous reactance  | %   | 175,6       | 154,1       | 140,1       | 125,8       | 147,3       |
| <b>X'<sub>q</sub></b>        | Quadrature-axis transient reactance    | %   | 175,6       | 154,1       | 140,1       | 125,8       | 147,3       |
| <b>X''<sub>q</sub></b>       | Quadrature-axis subtransient reactance | %   | 30,4        | 32,1        | 29,2        | 27,3        | 32          |
| <b>X<sub>2</sub></b>         | Negative-sequence reactance            | %   | 19,8        | 19,1        | 17,7        | 17          | 19,9        |
| <b>X<sub>0</sub></b>         | Zero sequence reactance                | %   | 3,71        | 3,61        | 2,78        | 2,58        | 3,06        |
| Saturated                    |  |     |             |             |             |             |             |
| <b>X<sub>d</sub></b>         | Direct-axis synchronous reactance      | %   | 284,5       | 201,4       | 194,4       | 210,1       | 183,9       |
| <b>X'<sub>d</sub></b>        | Direct-axis transient reactance        | %   | 19,5        | 15,4        | 13,5        | 13          | 15,2        |
| <b>X''<sub>d</sub></b>       | Direct-axis subtransient reactance     | %   | 6,48        | 4,99        | 6,65        | 5,43        | 6,39        |
| <b>X<sub>q</sub></b>         | Quadrature-axis synchronous reactance  | %   | 149,3       | 131         | 119,1       | 106,9       | 125,2       |
| <b>X'<sub>q</sub></b>        | Quadrature-axis transient reactance    | %   | 149,3       | 131         | 119,1       | 106,9       | 125,2       |
| <b>X''<sub>q</sub></b>       | Quadrature-axis subtransient reactance | %   | 25,8        | 27,3        | 24,9        | 23,2        | 27,2        |
| <b>X<sub>2</sub></b>         | Negative-sequence reactance            | %   | 14,8        | 16,2        | 15,1        | 14,4        | 16,9        |
| <b>X<sub>0</sub></b>         | Zero sequence reactance                | %   | 3,71        | 3,61        | 2,78        | 2,58        | 3,06        |
| <b>K<sub>cc</sub></b>        | Short circuit ratio                    |     | 0,5         | 0,47        | 0,45        | 0,48        | 0,48        |
| <b>T'<sub>d</sub></b>        | Transient time constant                | sec | 0,042       | 0,039       | 0,039       | 0,04        | 0,04        |
| <b>T''<sub>d</sub></b>       | Subtransient time constant             | sec | 0,006       | 0,006       | 0,008       | 0,01        | 0,01        |
| <b>T'<sub>do</sub></b>       | Open circuit time constant             | sec | 1,5         | 1,7         | 1,85        | 1,9         | 1,91        |
| <b>T<sub>a</sub></b>         | Armature time constant                 | sec | 0,015       | 0,015       | 0,017       | 0,017       | 0,017       |

## Additional information - Class H / 400V

|  |                                 |   |           |           |           |           |           |
|--|---------------------------------|---|-----------|-----------|-----------|-----------|-----------|
| <b>I<sub>o</sub></b>                   | Excitation current at no load   | A | 0,5       | 0,6       | 0,6       | 0,4       | 0,45      |
| <b>I<sub>c</sub></b>                   | Excitation current at full load | A | 2,3       | 2,2       | 2,1       | 2,4       | 2,5       |
| Overload                               |                                 |   |           |           |           |           |           |
| Overload per 20 sec.                   |                                 |   |           |           | %         |           |           |
|  |                                 |   |           |           | 300       |           |           |
| Heat dissipation                       |                                 | W | 6317      | 7106      | 8254      | 8755      | 8898      |
| Telephone Harmonic Factor - THF        |                                 | % | <2        | <2        | <2        | <2        | <2        |
| Waveform Distors.(THD) full load LL/LN |                                 | % | 2,9 / 3   | 2,8 / 2,9 | 2,3 / 2,5 | 2,3 / 2,4 | 2,4 / 2,5 |
| Waveform Distors.(THD) no load LL/LN   |                                 | % | 1,6 / 1,8 | 1,8 / 1,9 | 1,7 / 1,9 | 1,7 / 1,8 | 1,7 / 1,8 |

## Reactance &amp; Time constants- Class H / 480V






| Unsaturated (ref. EN60034-4) |  |     | ECP34 1S4 A | ECP34 2S4 A | ECP34 1L4 A | ECP34 2L4 A | ECP34 3L4 A |
|------------------------------|--|-----|-------------|-------------|-------------|-------------|-------------|
| <b>X<sub>d</sub></b>         | Direct-axis synchronous reactance      | %   | 334,7       | 236,9       | 228,7       | 247,2       | 223,3       |
| <b>X'<sub>d</sub></b>        | Direct-axis transient reactance        | %   | 23          | 18,1        | 15,9        | 15,2        | 18,5        |
| <b>X''<sub>d</sub></b>       | Direct-axis subtransient reactance     | %   | 7,62        | 5,87        | 7,83        | 6,39        | 7,76        |
| <b>X<sub>q</sub></b>         | Quadrature-axis synchronous reactance  | %   | 175,6       | 154,1       | 140,1       | 125,8       | 152         |
| <b>X'<sub>q</sub></b>        | Quadrature-axis transient reactance    | %   | 175,6       | 154,1       | 140,1       | 125,8       | 152         |
| <b>X''<sub>q</sub></b>       | Quadrature-axis subtransient reactance | %   | 30,4        | 32,1        | 29,2        | 27,3        | 33,1        |
| <b>X<sub>2</sub></b>         | Negative-sequence reactance            | %   | 19,8        | 19,1        | 17,7        | 17          | 20,5        |
| <b>X<sub>0</sub></b>         | Zero sequence reactance                | %   | 3,71        | 3,61        | 2,78        | 2,58        | 3,16        |
| Saturated                    |  |     |             |             |             |             |             |
| <b>X<sub>d</sub></b>         | Direct-axis synchronous reactance      | %   | 284,5       | 201,4       | 194,4       | 210,1       | 189,8       |
| <b>X'<sub>d</sub></b>        | Direct-axis transient reactance        | %   | 19,5        | 15,4        | 13,5        | 13          | 15,7        |
| <b>X''<sub>d</sub></b>       | Direct-axis subtransient reactance     | %   | 6,48        | 4,99        | 6,65        | 5,43        | 6,6         |
| <b>X<sub>q</sub></b>         | Quadrature-axis synchronous reactance  | %   | 149,3       | 131         | 119,1       | 106,9       | 129,2       |
| <b>X'<sub>q</sub></b>        | Quadrature-axis transient reactance    | %   | 149,3       | 131         | 119,1       | 106,9       | 129,2       |
| <b>X''<sub>q</sub></b>       | Quadrature-axis subtransient reactance | %   | 25,8        | 27,3        | 24,9        | 23,2        | 28,1        |
| <b>X<sub>2</sub></b>         | Negative-sequence reactance            | %   | 16,8        | 16,2        | 15,1        | 14,4        | 17,4        |
| <b>X<sub>0</sub></b>         | Zero sequence reactance                | %   | 3,71        | 3,61        | 2,78        | 2,58        | 3,16        |
| <b>K<sub>cc</sub></b>        | Short circuit ratio                    |     | 0,5         | 0,47        | 0,45        | 0,48        | 0,48        |
| <b>T'<sub>d</sub></b>        | Transient time constant                | sec | 0,042       | 0,039       | 0,039       | 0,04        | 0,04        |
| <b>T''<sub>d</sub></b>       | Subtransient time constant             | sec | 0,006       | 0,006       | 0,008       | 0,01        | 0,01        |
| <b>T'<sub>do</sub></b>       | Open circuit time constant             | sec | 1,5         | 1,7         | 1,85        | 1,9         | 1,91        |
| <b>T<sub>a</sub></b>         | Armature time constant                 | sec | 0,015       | 0,015       | 0,017       | 0,017       | 0,017       |

## Additional information - Class H / 480V

|  |                                 |   |           |           |           |           |           |
|--|---------------------------------|---|-----------|-----------|-----------|-----------|-----------|
| <b>I<sub>o</sub></b>                   | Excitation current at no load   | A | 0,7       | 0,5       | 0,5       | 0,5       | 0,4       |
| <b>I<sub>c</sub></b>                   | Excitation current at full load | A | 2,2       | 2,2       | 2,0       | 2,6       | 2,5       |
| Overload                               |                                 |   |           |           |           |           |           |
| Overload per 20 sec.                   |                                 |   |           |           | %         |           |           |
|  |                                 |   |           |           | 300       |           |           |
| Heat dissipation                       |                                 | W | 5766      | 6663      | 7109      | 7579      | 7575      |
| Telephone Interference Factor - TIF    |                                 |   | <40       | <40       | <40       | <40       | <40       |
| Waveform Distors.(THD) full load LL/LN |                                 | % | 2,9 / 3   | 2,8 / 2,9 | 2,3 / 2,5 | 2,3 / 2,4 | 2,4 / 2,5 |
| Waveform Distors.(THD) no load LL/LN   |                                 | % | 1,6 / 1,8 | 1,8 / 1,9 | 1,7 / 1,9 | 1,7 / 1,8 | 1,7 / 1,8 |

## Efficiencies @ 50Hz






| Models      |   | 380V 50Hz |      |      |      |      | 400V 50Hz |      |      |      |      | 415V 50Hz |      |      |      |      | 440V 50Hz |      |      |      |      |
|-------------|---|-----------|------|------|------|------|-----------|------|------|------|------|-----------|------|------|------|------|-----------|------|------|------|------|
|             |   | 0.25      | 0.5  | 0.75 | 1    | 1.1  | 0.25      | 0.5  | 0.75 | 1    | 1.1  | 0.25      | 0.5  | 0.75 | 1    | 1.1  | 0.25      | 0.5  | 0.75 | 1    | 1.1  |
| ECP34 1S4 A | % | 86,2      | 89,9 | 91,6 | 91,4 | 91,1 | 86,0      | 90,0 | 91,9 | 91,5 | 91,1 | 85,8      | 90,0 | 91,8 | 91,2 | 90,8 | 85,8      | 89,8 | 91,5 | 91,0 | 90,6 |
| ECP34 2S4 A | % | 87,2      | 90,6 | 92,2 | 92,1 | 92,0 | 87,0      | 90,7 | 92,5 | 92,2 | 92,0 | 86,8      | 90,7 | 92,4 | 91,9 | 91,6 | 86,8      | 90,5 | 92,1 | 91,7 | 91,5 |
| ECP34 1L4 A | % | 88,2      | 91,6 | 93,1 | 92,8 | 92,5 | 88,2      | 91,7 | 93,4 | 92,9 | 92,5 | 88,1      | 91,7 | 93,2 | 92,6 | 92,2 | 88,0      | 91,6 | 93,0 | 92,4 | 92,0 |
| ECP34 2L4 A | % | 89,2      | 91,9 | 93,2 | 93,1 | 92,9 | 89,0      | 92,0 | 93,5 | 93,2 | 93,0 | 88,8      | 92,0 | 93,4 | 92,9 | 92,7 | 88,8      | 91,8 | 93,1 | 92,7 | 92,5 |
| ECP34 3L4 A | % | 89,8      | 92,2 | 93,4 | 93,4 | 93,2 | 89,6      | 92,3 | 93,7 | 93,5 | 93,3 | 89,4      | 92,3 | 93,6 | 93,2 | 93,0 | 89,4      | 92,1 | 93,3 | 93,0 | 92,8 |

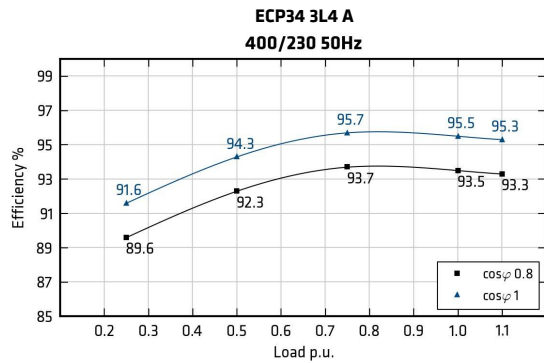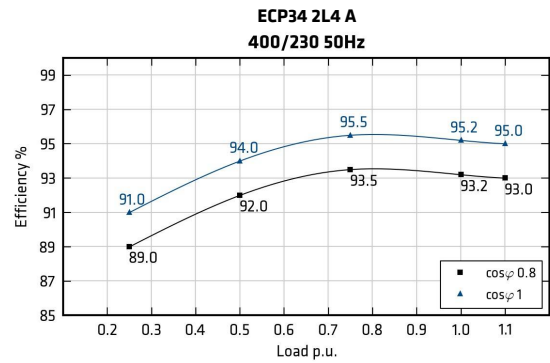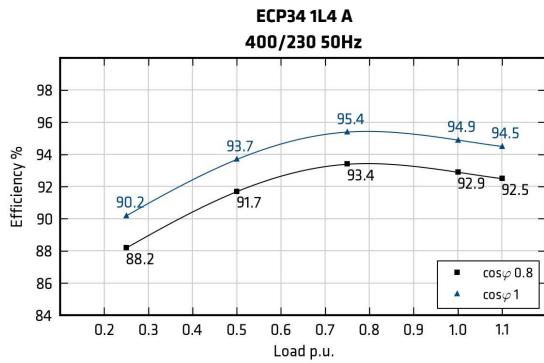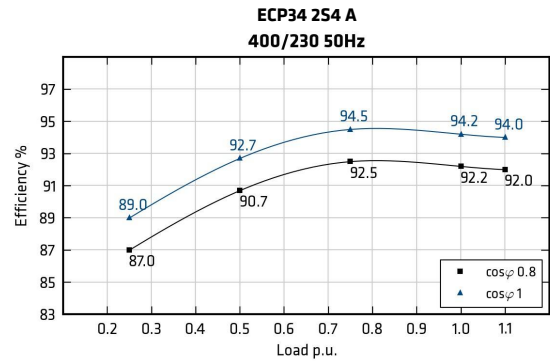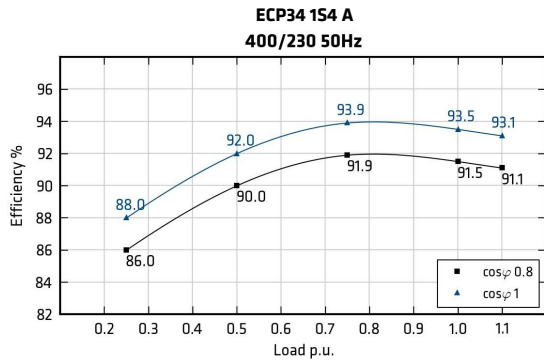









## Efficiencies @ 60Hz

| Models      |   | 415V 60Hz |      |      |      |      | 440V 60Hz |      |      |      |      | 460V 60Hz |      |      |      |      | 480V 60Hz |      |      |      |      |
|-------------|---|-----------|------|------|------|------|-----------|------|------|------|------|-----------|------|------|------|------|-----------|------|------|------|------|
|             |   | 0.25      | 0.5  | 0.75 | 1    | 1.1  | 0.25      | 0.5  | 0.75 | 1    | 1.1  | 0.25      | 0.5  | 0.75 | 1    | 1.1  | 0.25      | 0.5  | 0.75 | 1    | 1.1  |
| ECP34 1S4 A | % | 87,7      | 91,5 | 93,3 | 92,7 | 92,2 | 87,7      | 91,6 | 93,5 | 93,2 | 93,0 | 87,7      | 91,7 | 93,6 | 93,3 | 93,1 | 87,5      | 91,8 | 93,8 | 93,4 | 93,1 |
| ECP34 2S4 A | % | 88,2      | 92,0 | 93,6 | 93,1 | 92,7 | 88,2      | 92,1 | 93,8 | 93,6 | 93,4 | 88,2      | 92,2 | 93,9 | 93,7 | 93,5 | 88,0      | 92,3 | 94,1 | 93,8 | 93,5 |
| ECP34 1L4 A | % | 89,3      | 93,1 | 94,5 | 94,0 | 93,6 | 89,4      | 93,3 | 95,0 | 94,5 | 94,1 | 89,5      | 93,5 | 95,2 | 94,7 | 94,3 | 89,3      | 93,6 | 95,3 | 94,8 | 94,4 |
| ECP34 2L4 A | % | 90,2      | 93,5 | 94,7 | 94,3 | 94,1 | 90,2      | 93,6 | 94,9 | 94,8 | 94,6 | 90,2      | 93,7 | 95,0 | 94,9 | 94,7 | 90,0      | 93,8 | 95,2 | 95,0 | 94,8 |
| ECP34 3L4 A | % | 91,2      | 93,8 | 95,0 | 94,6 | 94,4 | 91,2      | 93,9 | 95,2 | 95,1 | 94,9 | 91,2      | 94,0 | 95,3 | 95,2 | 95,0 | 91,0      | 94,1 | 95,5 | 95,3 | 95,1 |

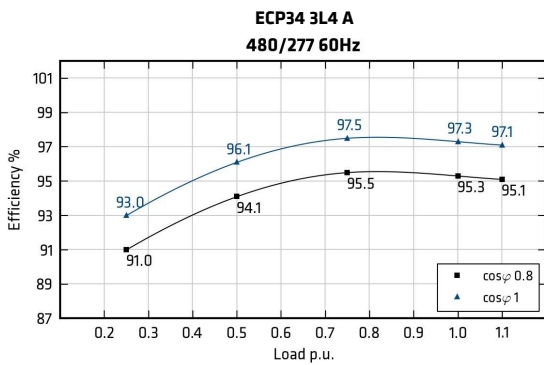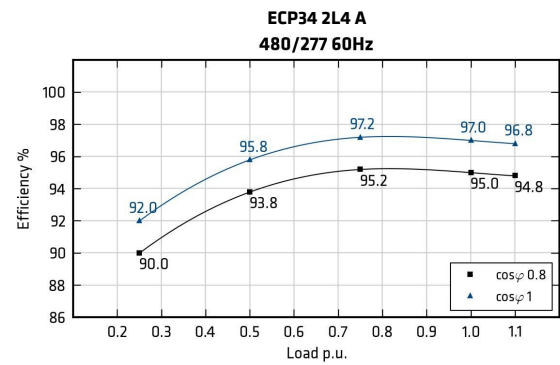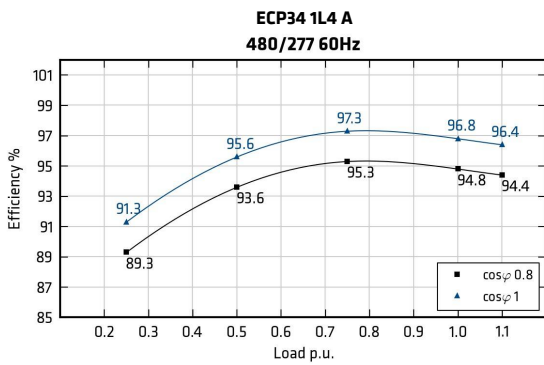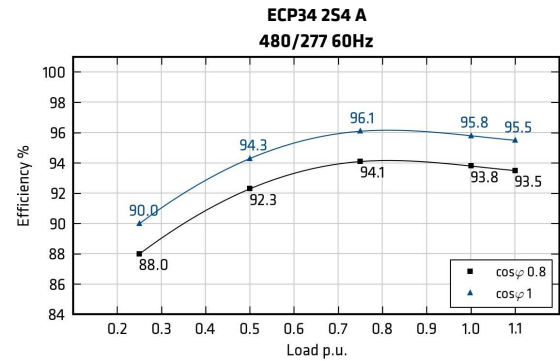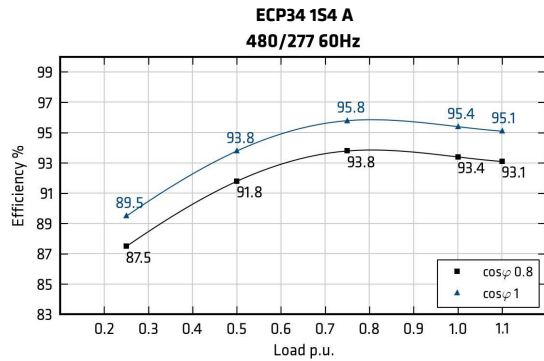

Transients voltage

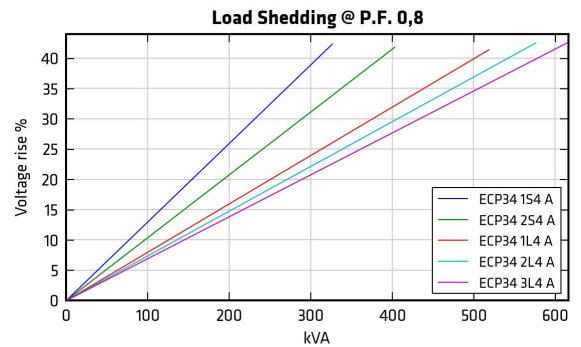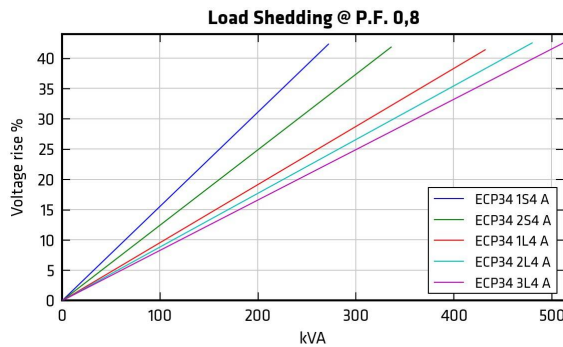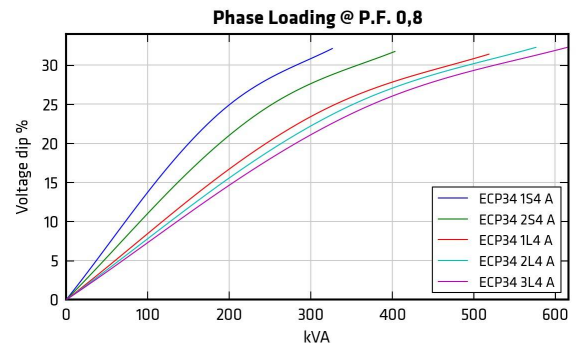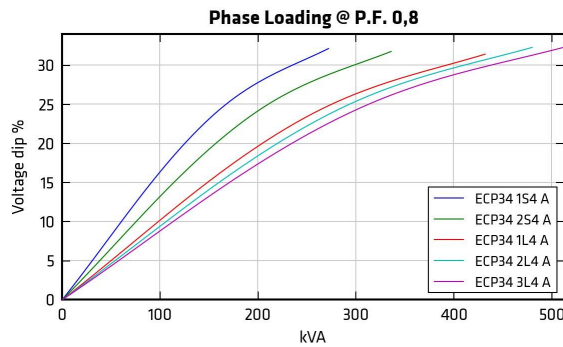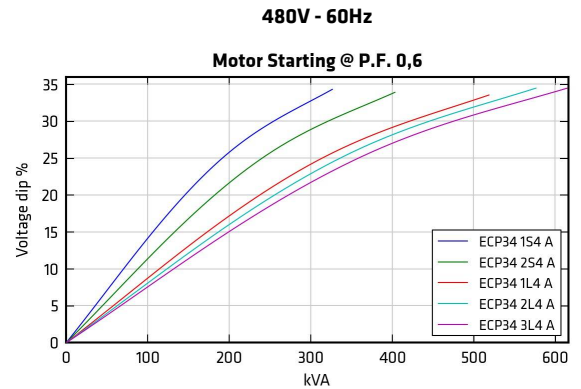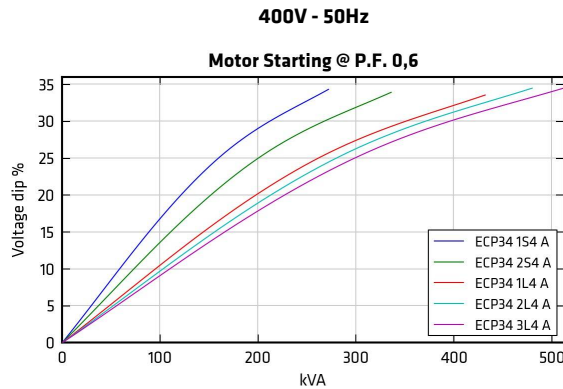

In order to scale transient curves as a function of a power factor or voltage if not indicated, please proceed as follows:

Power Factor coefficient corrector (PFCC), to be used on power factor 0.6 curves:

$$PFCC = \sin(\text{ARCCos}(PF_{\text{new}})) / 0.8$$

Example. The PFCC at power factor 0.3 is 1.192 [  $PFCC = \sin(\text{ARCCos}(0.3)) / 0.8$  ]. This means that the voltage fall at a given power at pf 0.3 is equivalent to the one that can be read on the pf 0.6 curve if the load is considered 1.192 times bigger (19% higher value. ).

In this example, a 100 kVA load insertion at pf 0.3 is equivalent in voltage fall to a 119kVA load insertion at pf 0.6.

Voltage coefficient corrector (VCC):


$$VCC = (400/V_{\text{new}})^2 \text{ if } 50 \text{ Hz}; VCC = (480/V_{\text{new}})^2 \text{ if } 60 \text{ Hz}$$

Example. VCC at 415V 60 Hz is 1.338 [  $VCC = (480/415)^2$  ]. This means that the voltage fall at a given power at 415V is equivalent to the one that can be read on the power factor 0.6 curve if the load is considered 1.338 times bigger (33% higher value. ).


In this example, a 100 kVA load insertion at 415V is equivalent in voltage fall to a 133kVA load insertion at 480V.

50Hz Short circuit decrement curves - No load excitation at rated speed


ECP34 1S4 A

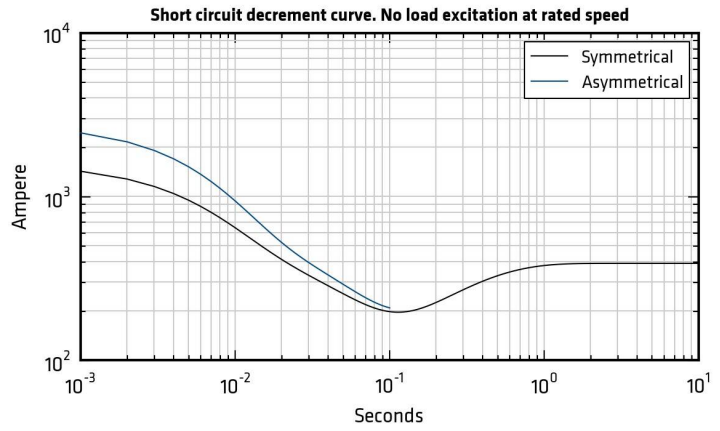


ECP34 2S4 A

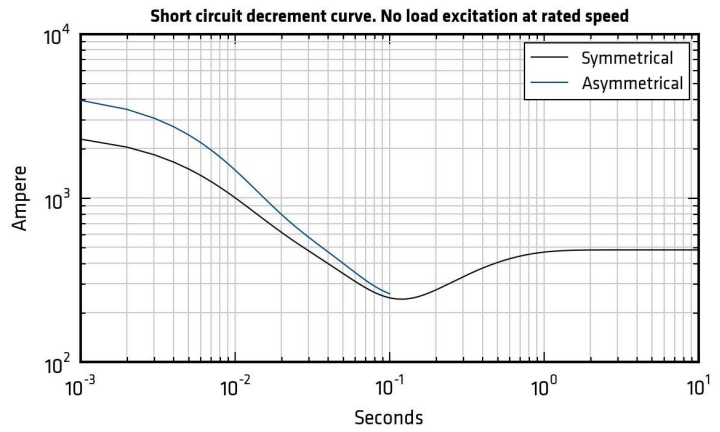

ECP34 1L4 A

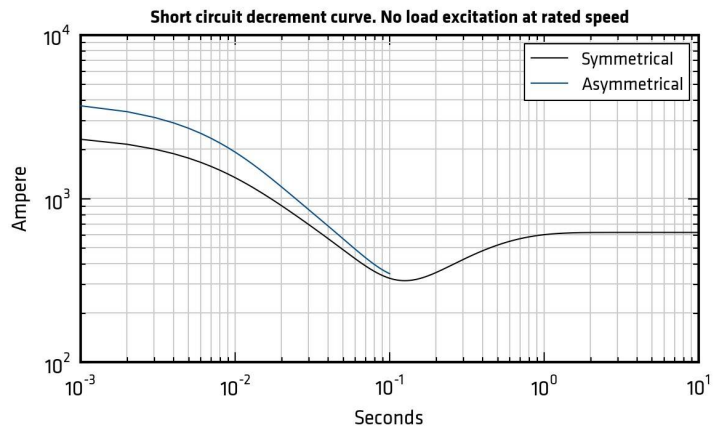

ECP34 2L4 A

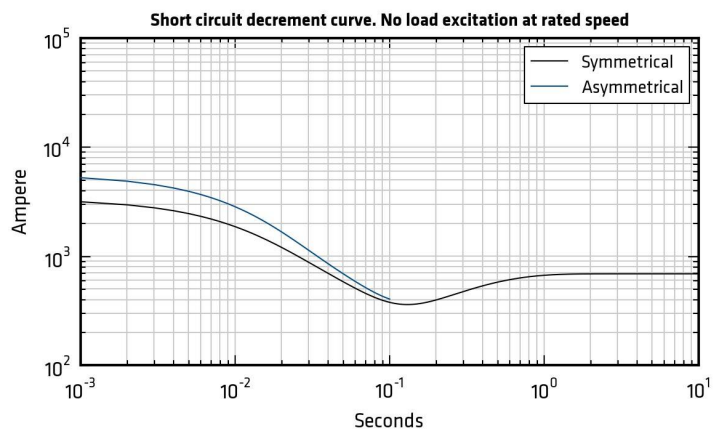


\*Please refer to tables at page 6



50Hz Short circuit decrement curves - No load excitation at rated speed


ECP34 3L4 A

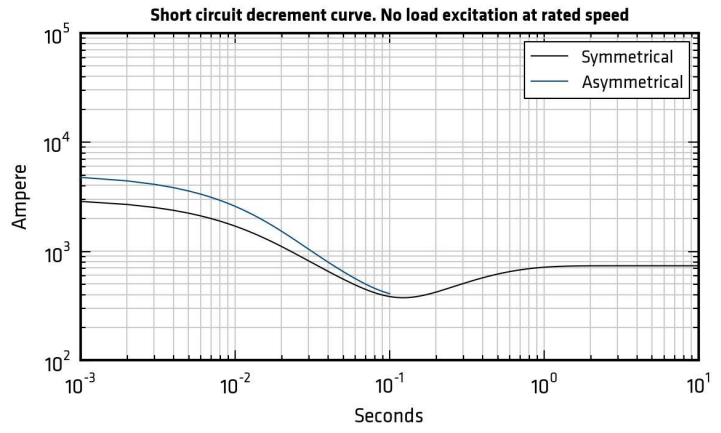


\*Please refer to tables at page 6

60Hz Short circuit decrement curves - No load excitation at rated speed


ECP34 1S4 A

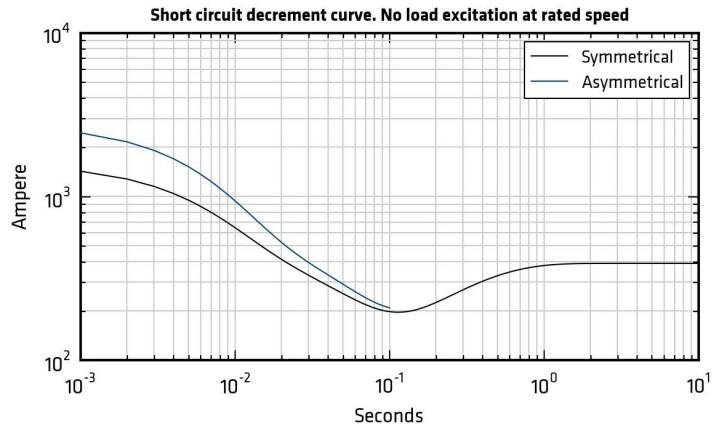


ECP34 2S4 A

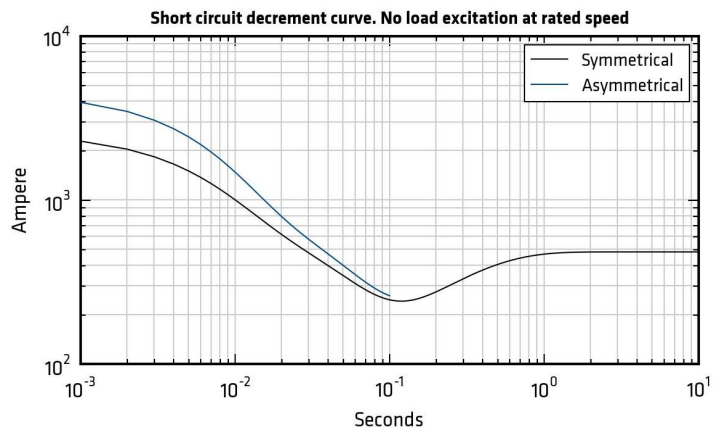

ECP34 1L4 A

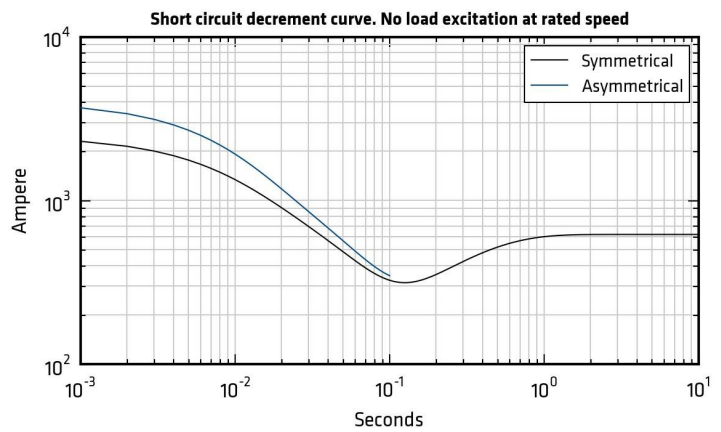


ECP34 2L4 A

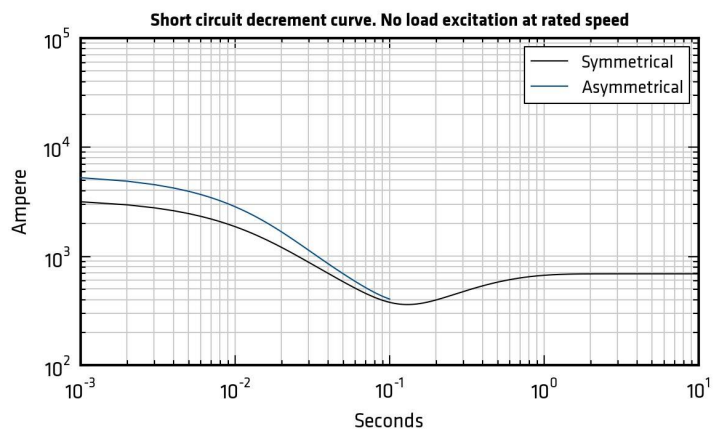

\*Please refer to tables at page 6

60Hz Short circuit decrement curves - No load excitation at rated speed

ECP34 3L4 A

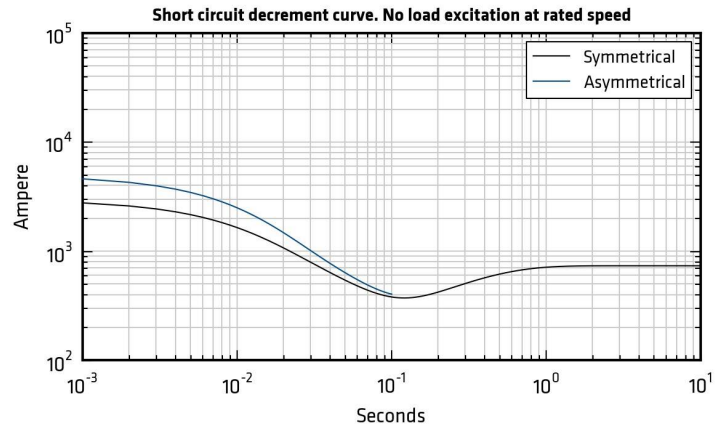


\*Please refer to tables at page 6





## Additional Characteristics



| Data                             | ECP34 1S4 A         |       | ECP34 2S4 A |       | ECP34 1L4 A |       | ECP34 2L4 A |       | ECP34 3L4 A |       |       |
|----------------------------------|---------------------|-------|-------------|-------|-------------|-------|-------------|-------|-------------|-------|-------|
|                                  | 50Hz                | 60Hz  | 50Hz        | 60Hz  | 50Hz        | 60Hz  | 50Hz        | 60Hz  | 50Hz        | 60Hz  |       |
| Damper cage                      | Aluminium           |       |             |       |             |       |             |       |             |       |       |
| Stator Winding Resistance (20°C) | Ω                   | 0,03  |             | 0,02  |             | 0,016 |             | 0,015 |             | 0,015 |       |
| Rotor Winding Resistance (20°C)  | Ω                   | 2,477 |             | 2,951 |             | 4,142 |             | 3,577 |             | 4,35  |       |
| Stator Exciter Resistance (20°C) | Ω                   | 15,28 |             | 15,28 |             | 15,28 |             | 15,28 |             | 15,28 |       |
| Rotor Exciter Resistance (20°C)  | Ω                   | 0,41  |             | 0,41  |             | 0,41  |             | 0,41  |             | 0,41  |       |
| Weight of complete generator     | kg                  | 331,0 |             | 409,0 |             | 467,0 |             | 481,0 |             | 485,0 |       |
| Unbalanced magnetic pull         | kN/mm               | 4,9   |             | 5,1   |             | 5,7   |             | 5,6   |             | 5,4   |       |
| Air flow                         | m <sup>3</sup> /min | 19,3  | 23,0        | 19,3  | 23,0        | 19,3  | 23,0        | 19,3  | 23,0        | 19,3  | 23,0  |
| Noise level at 1m/7m             | dB(A)               | 79/65 | 83/69       | 79/65 | 83/69       | 79/65 | 83/69       | 79/65 | 83/69       | 79/65 | 83/69 |

## PQ Diagram


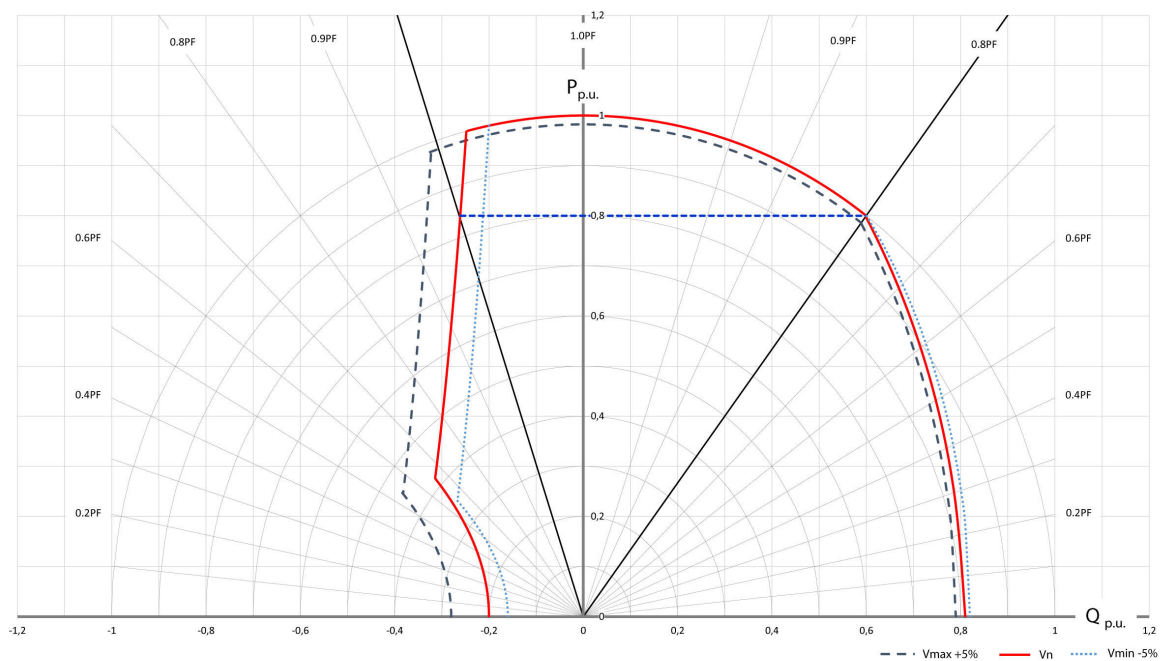


ECP34 1S4 A

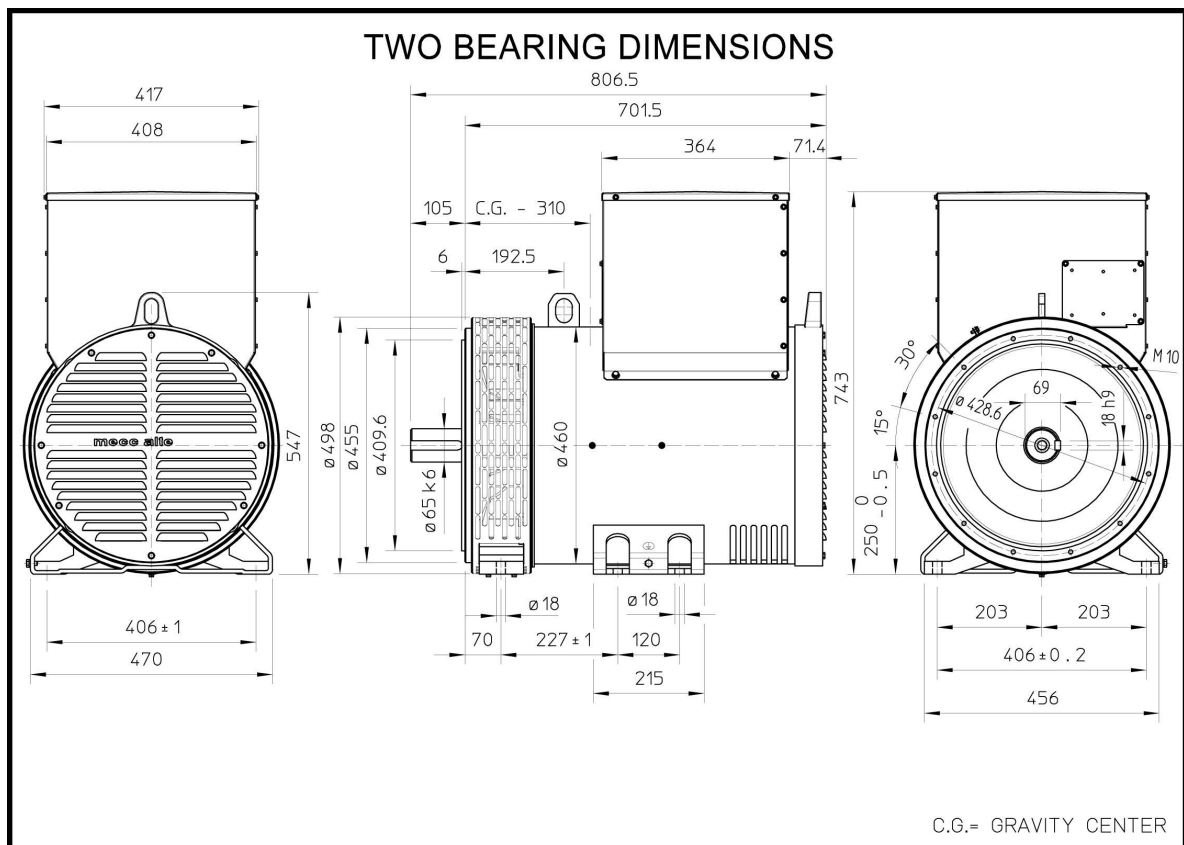
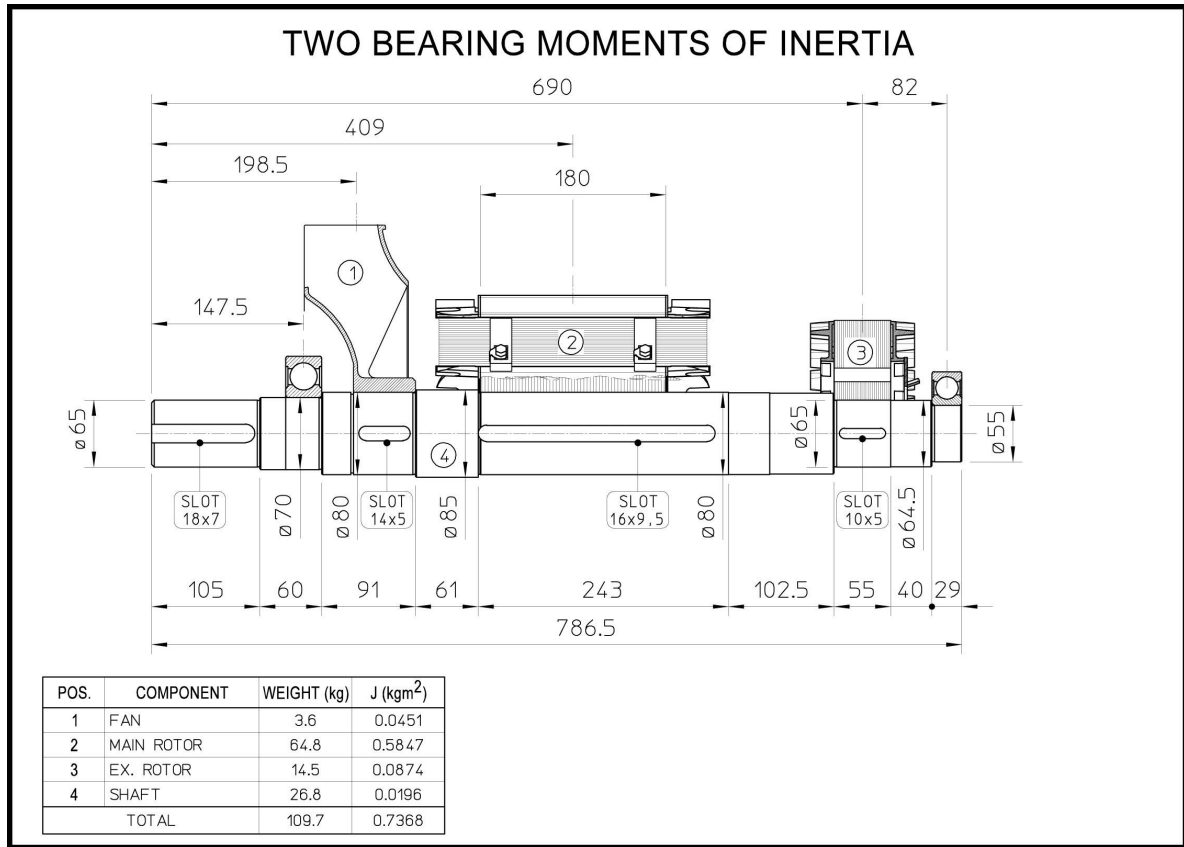


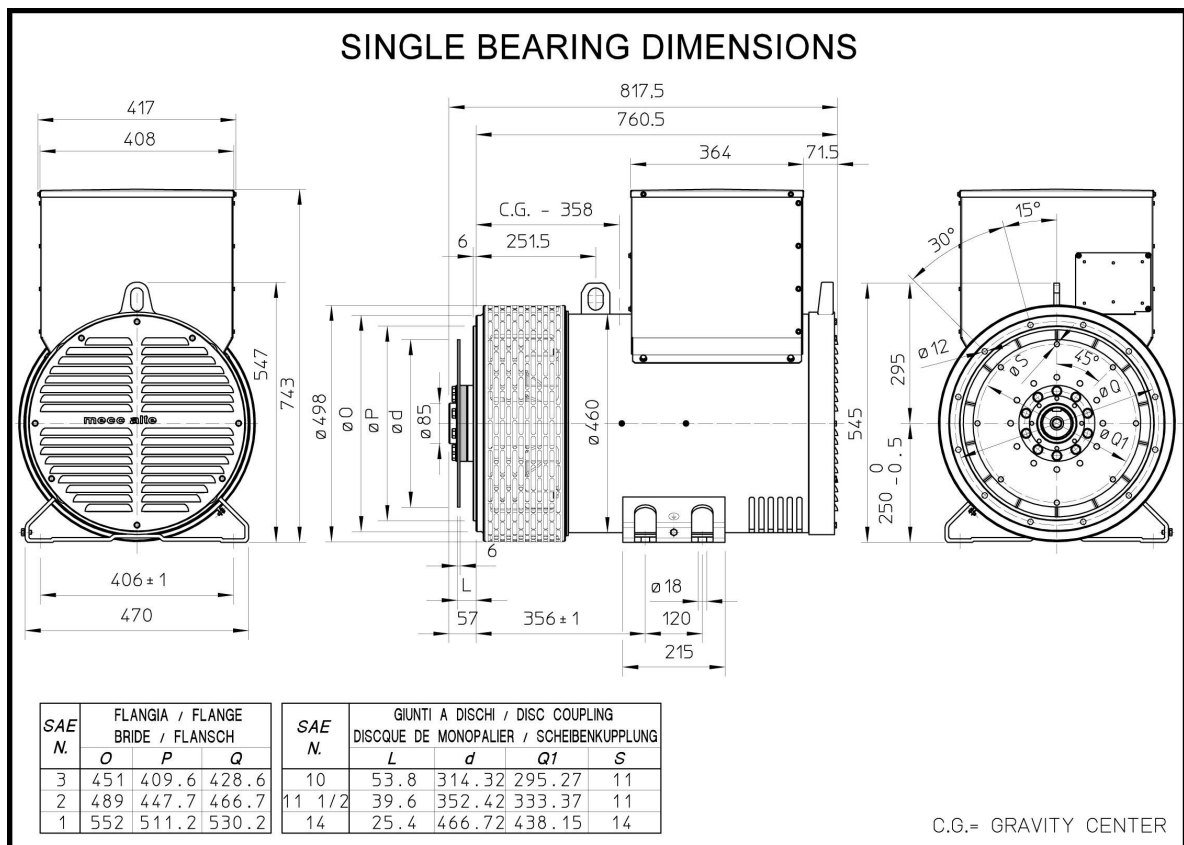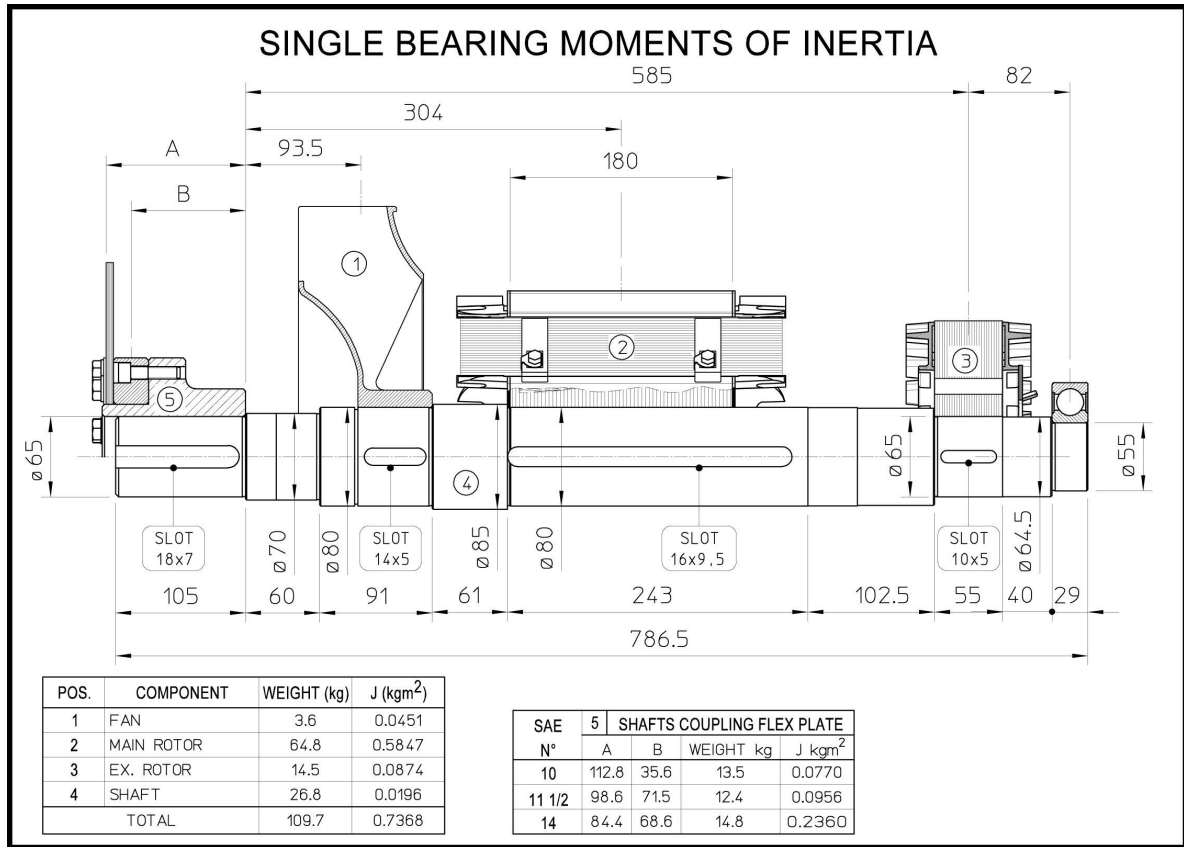

ECP34 2S4 A

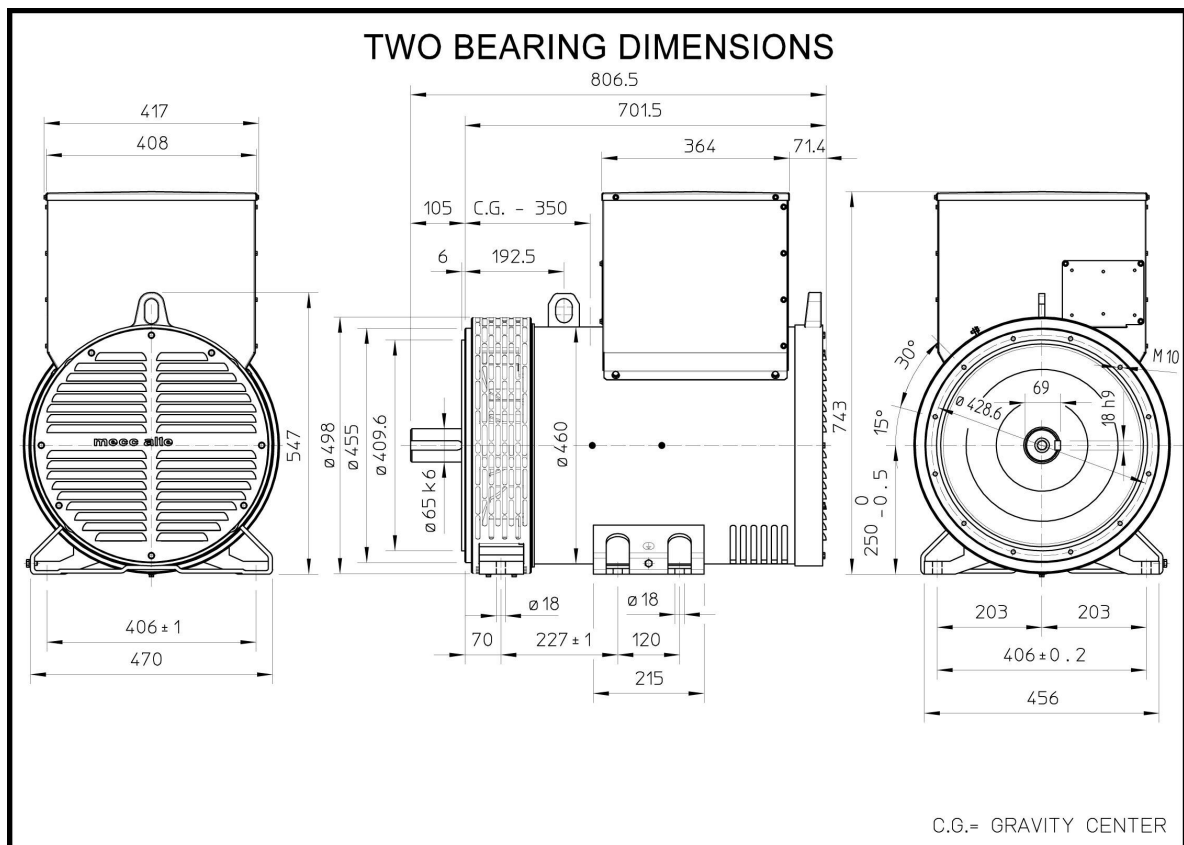
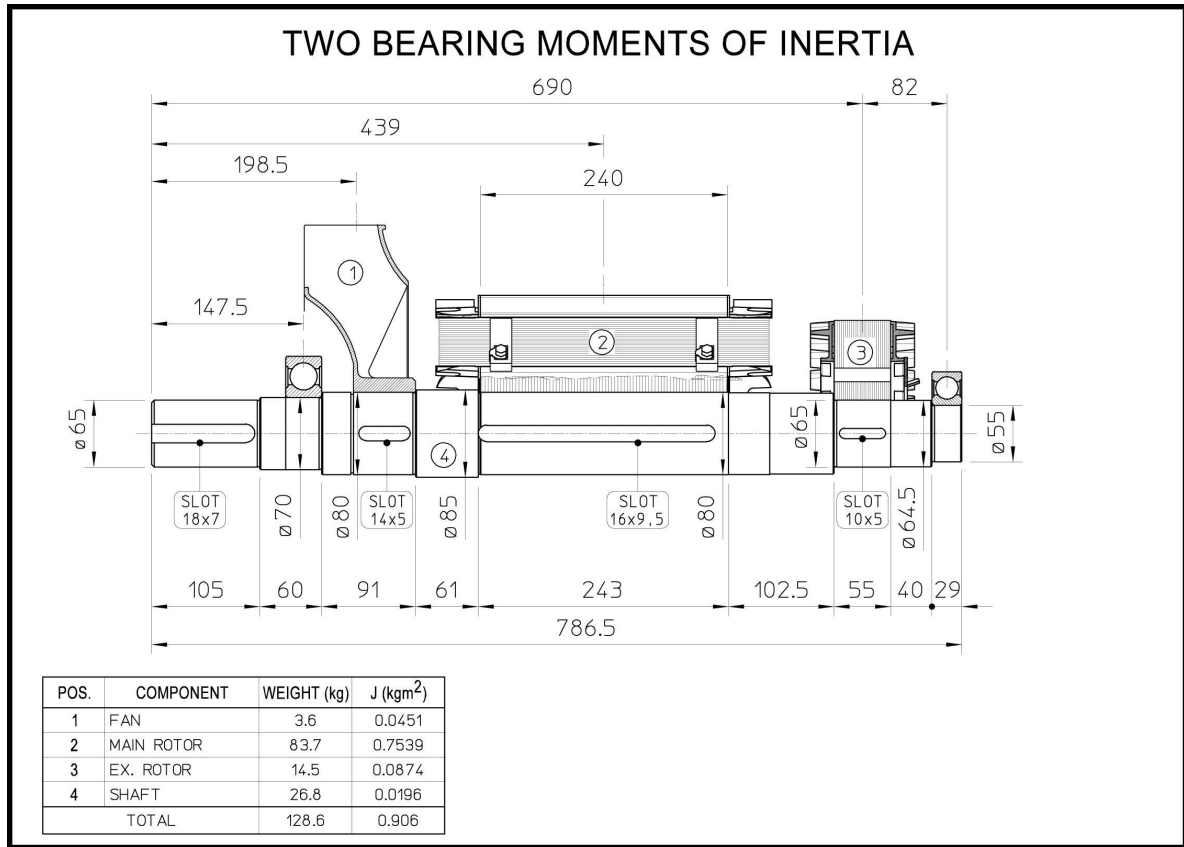




ECP34 2S4 A

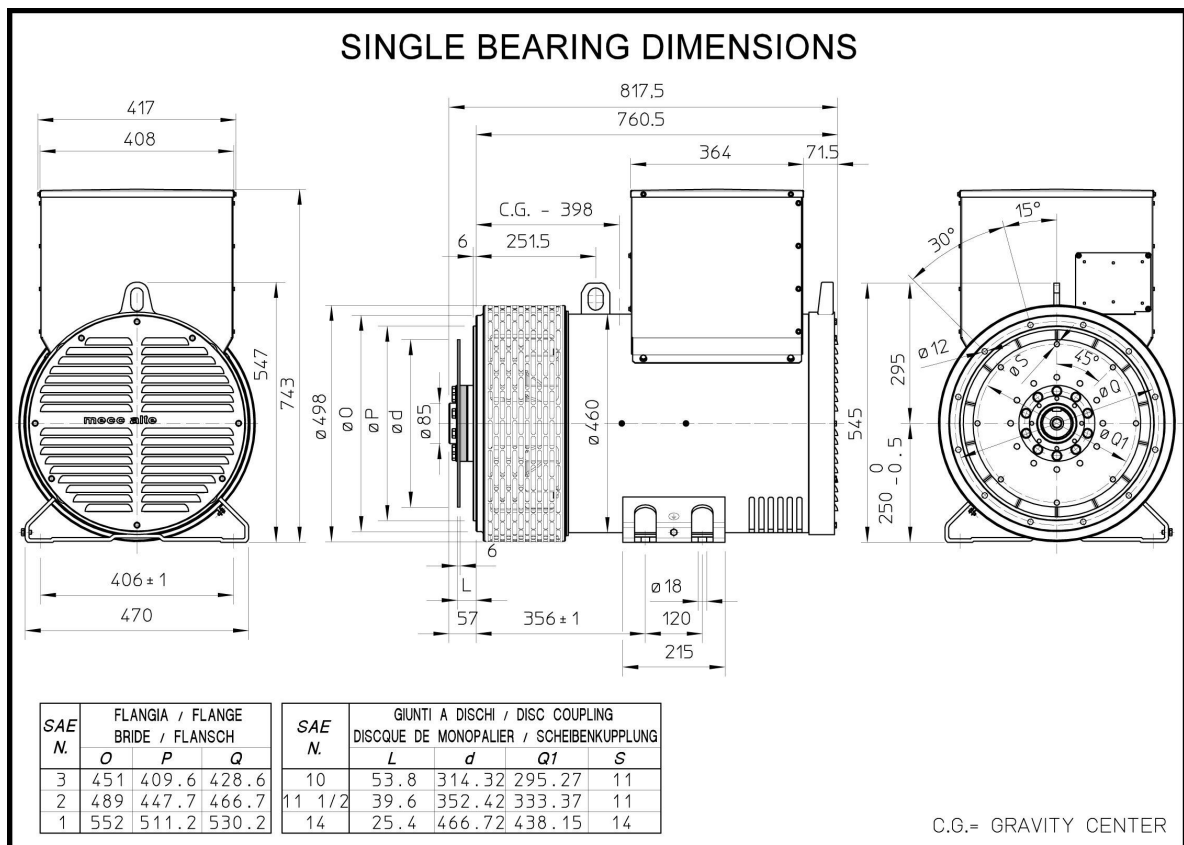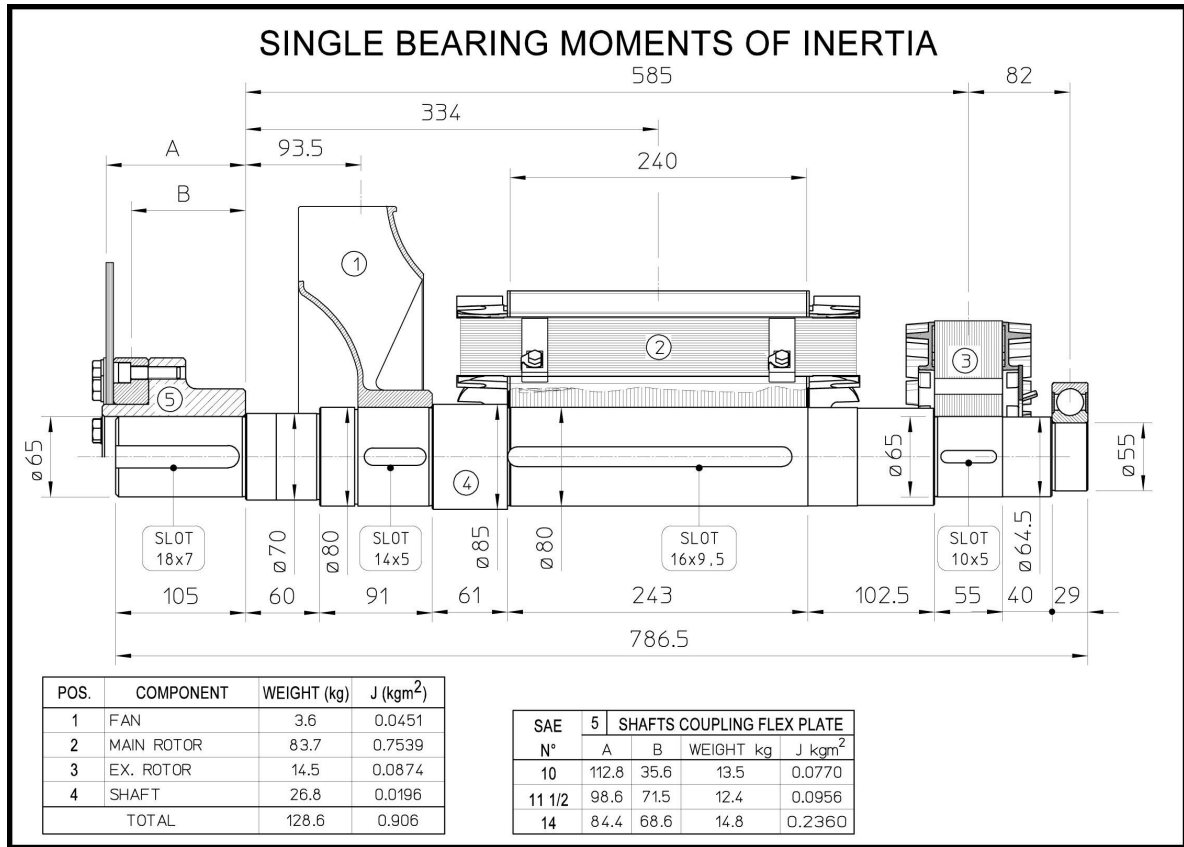







ECP34 1L4 A

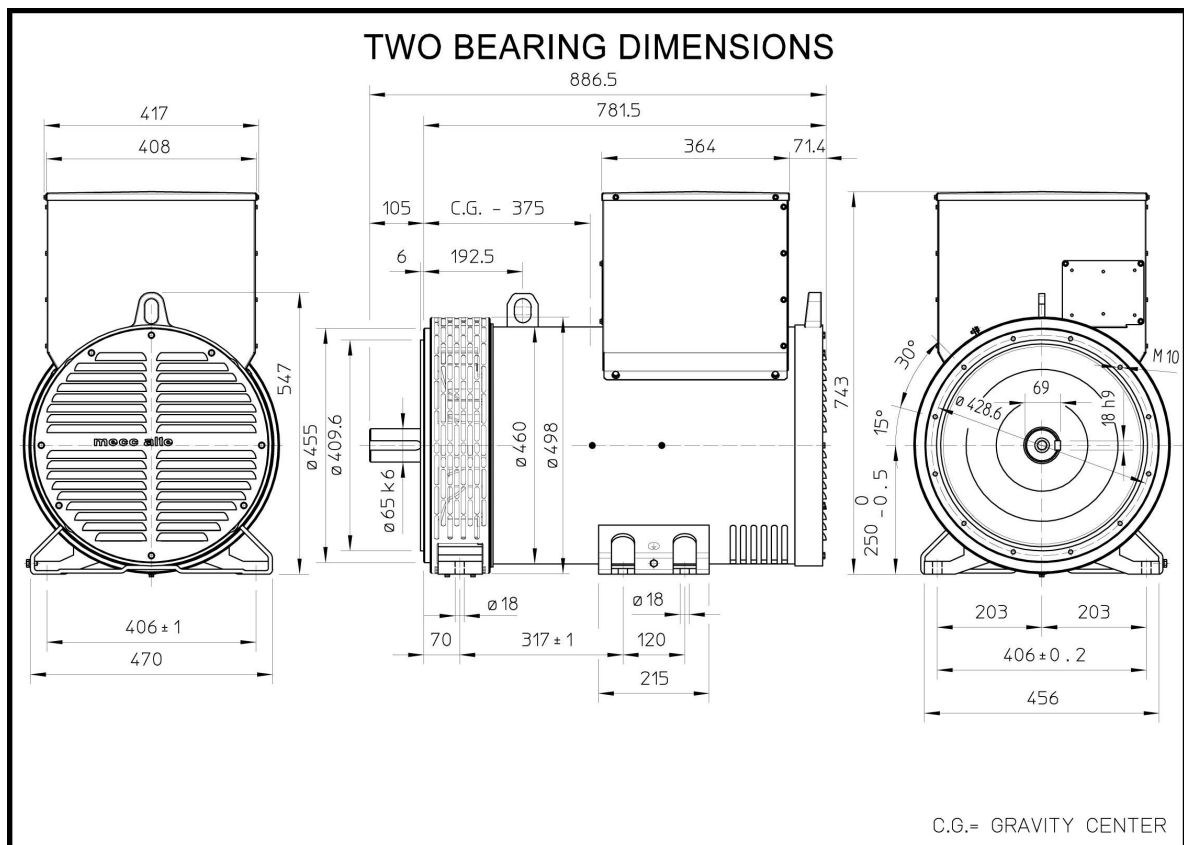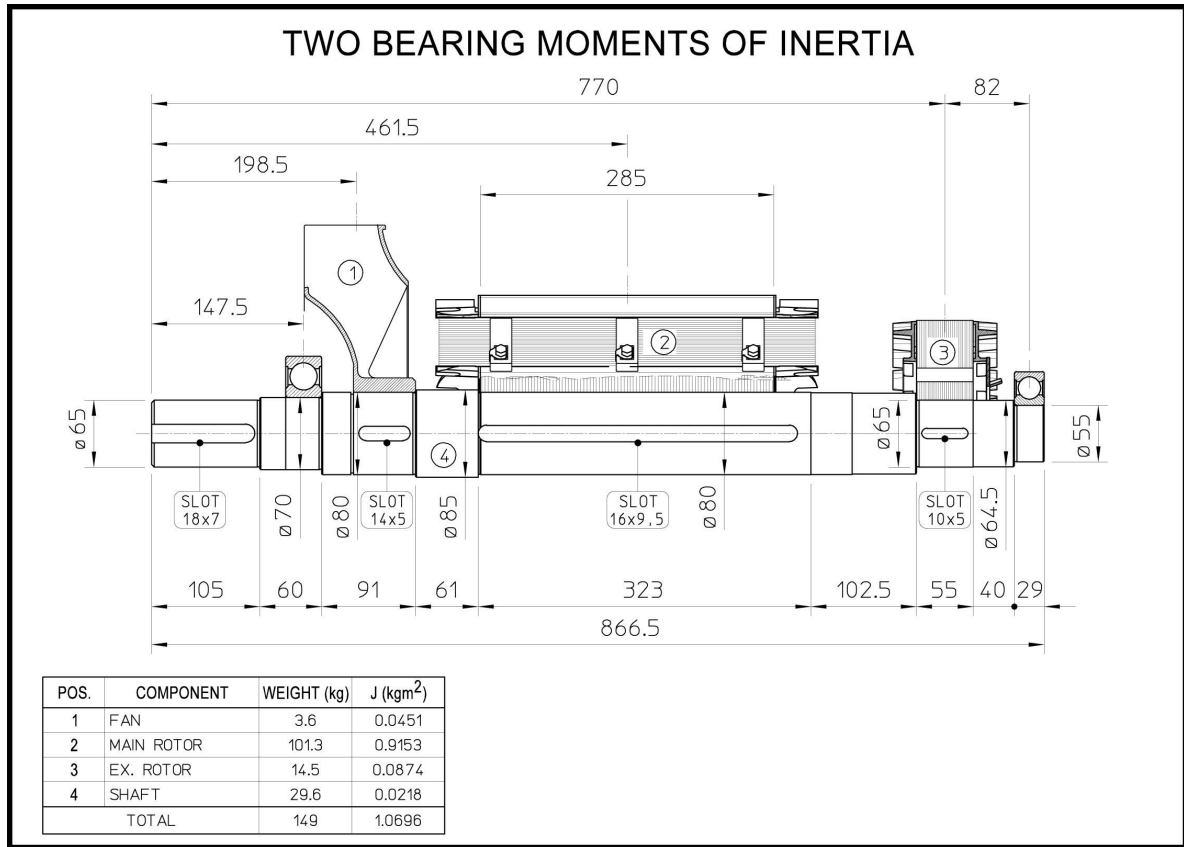

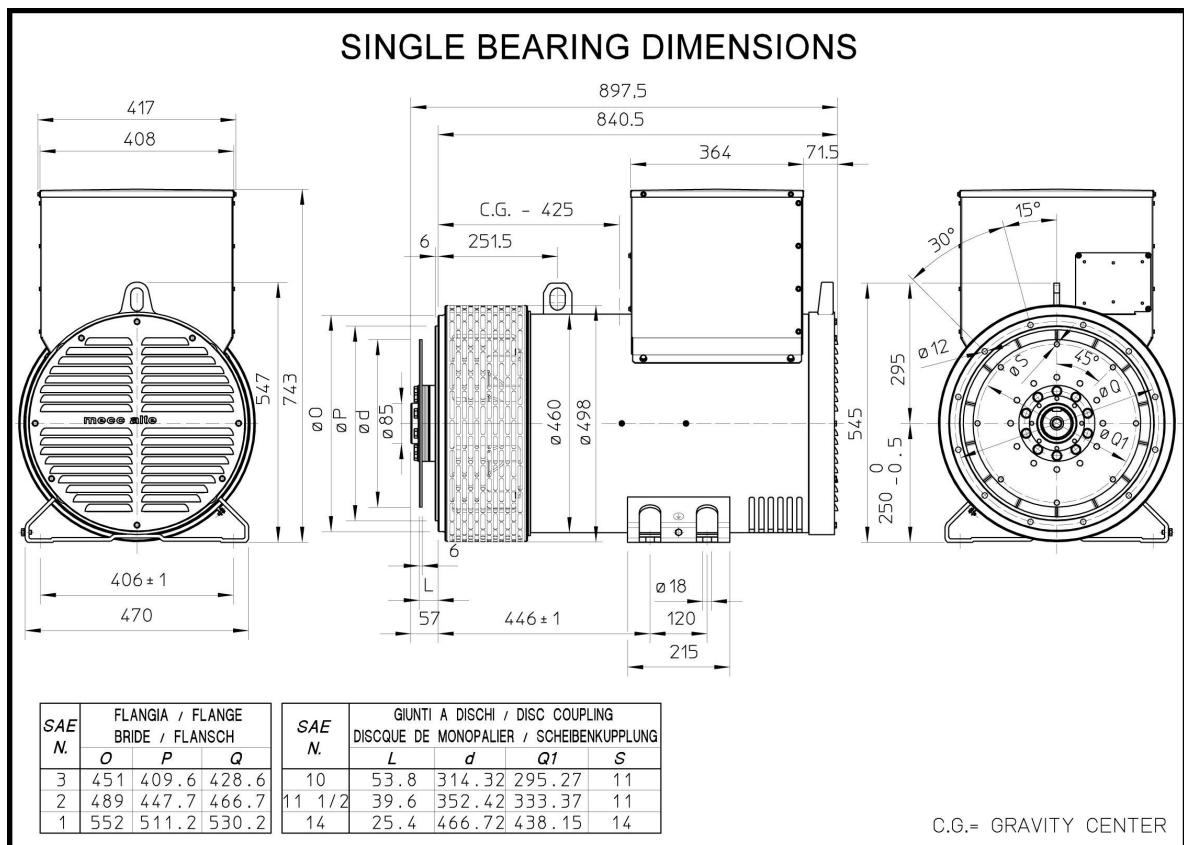
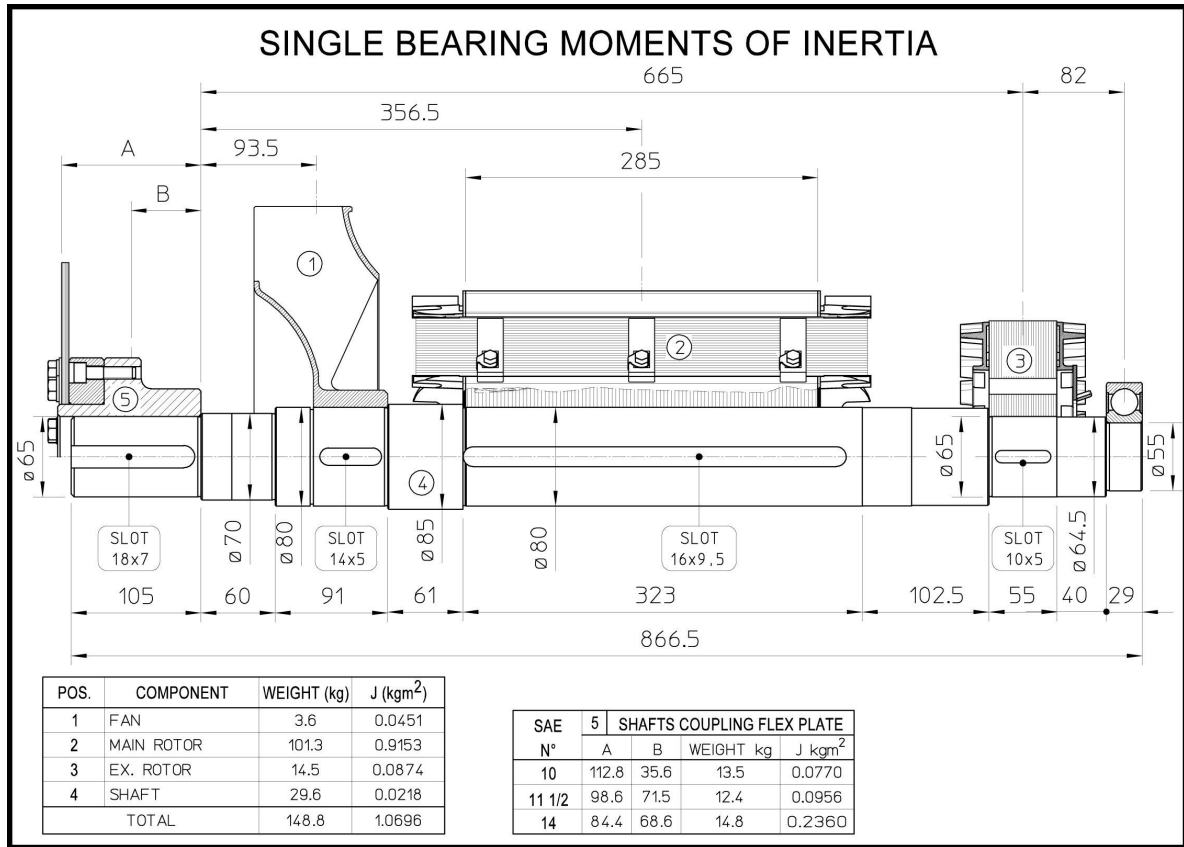


ECP34 2L4 A

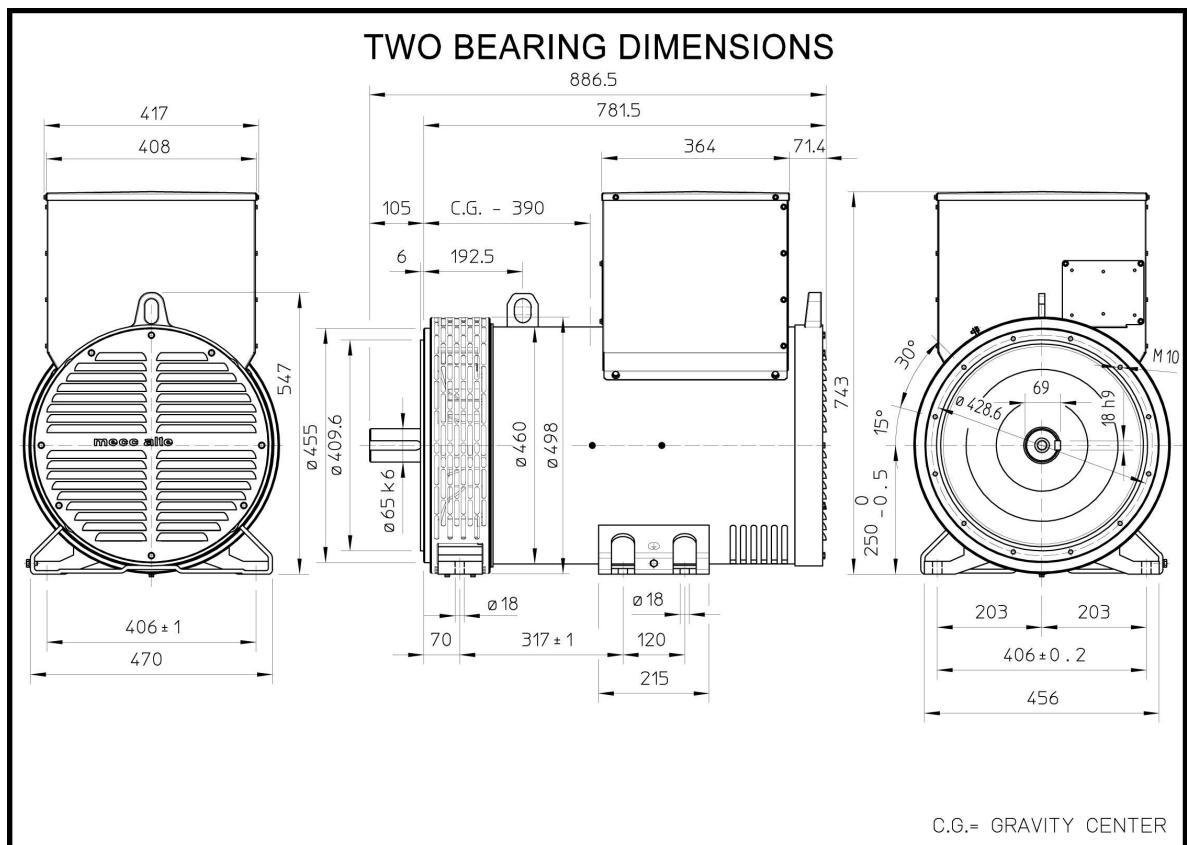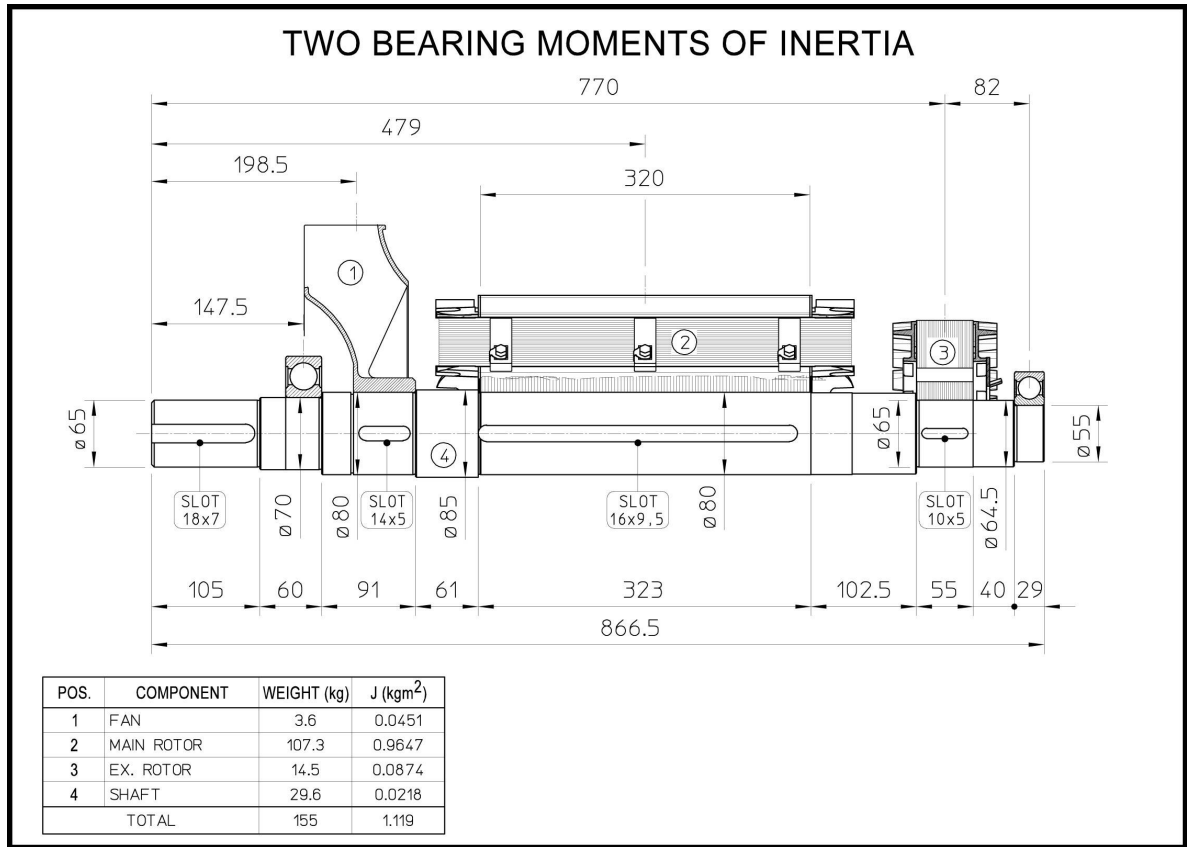

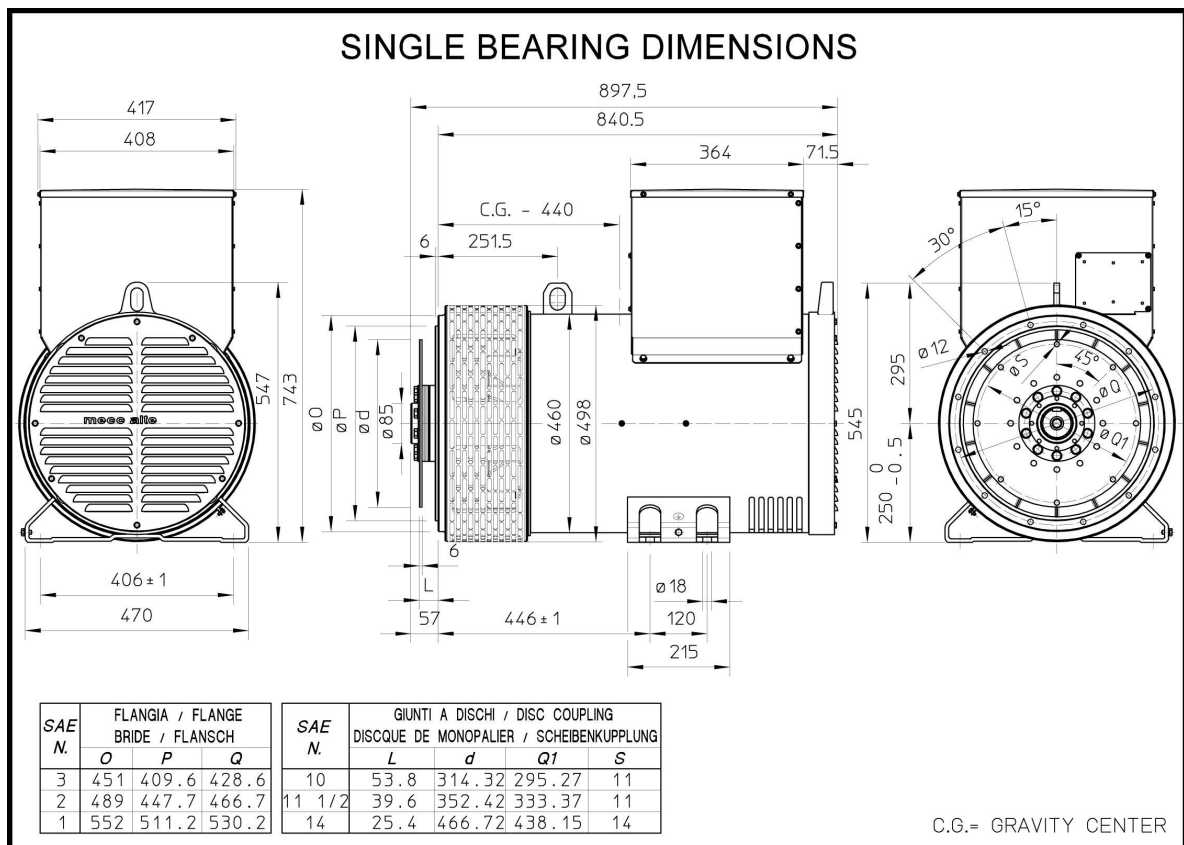
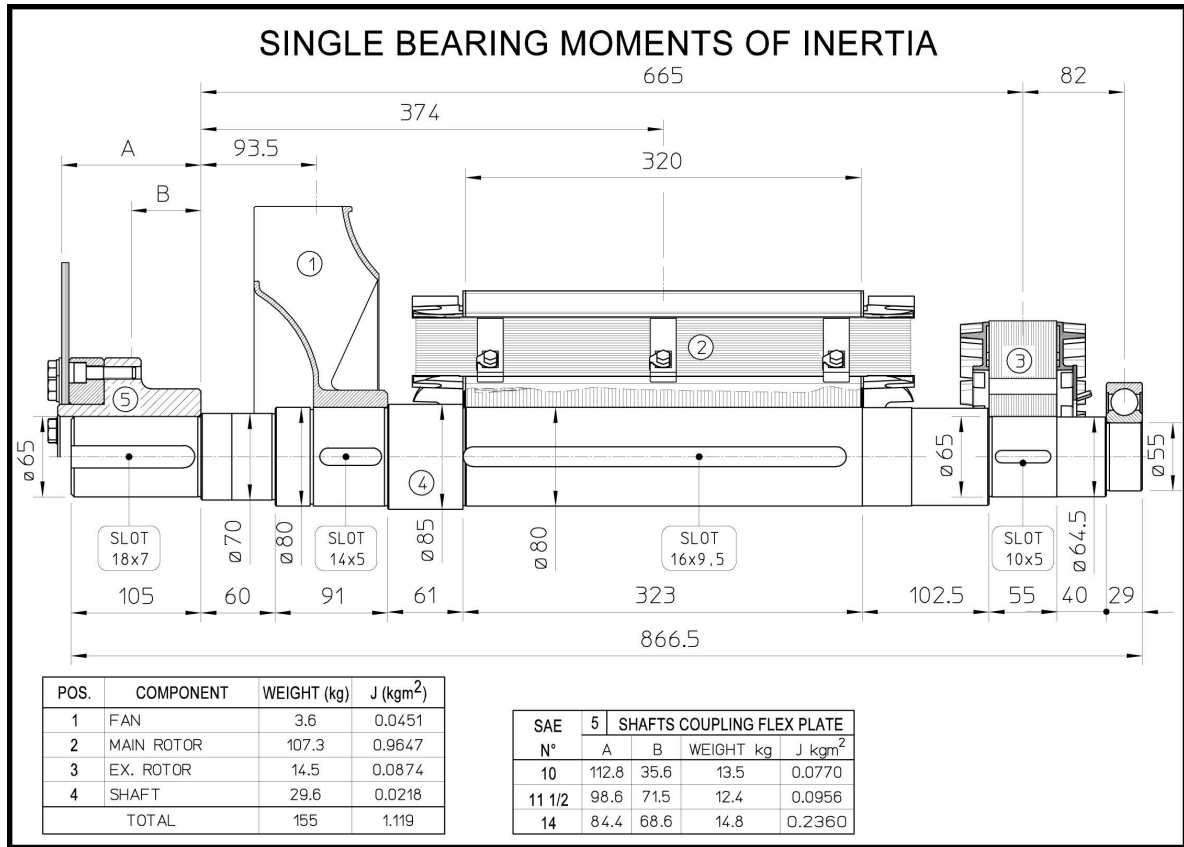


ECP34 3L4 A

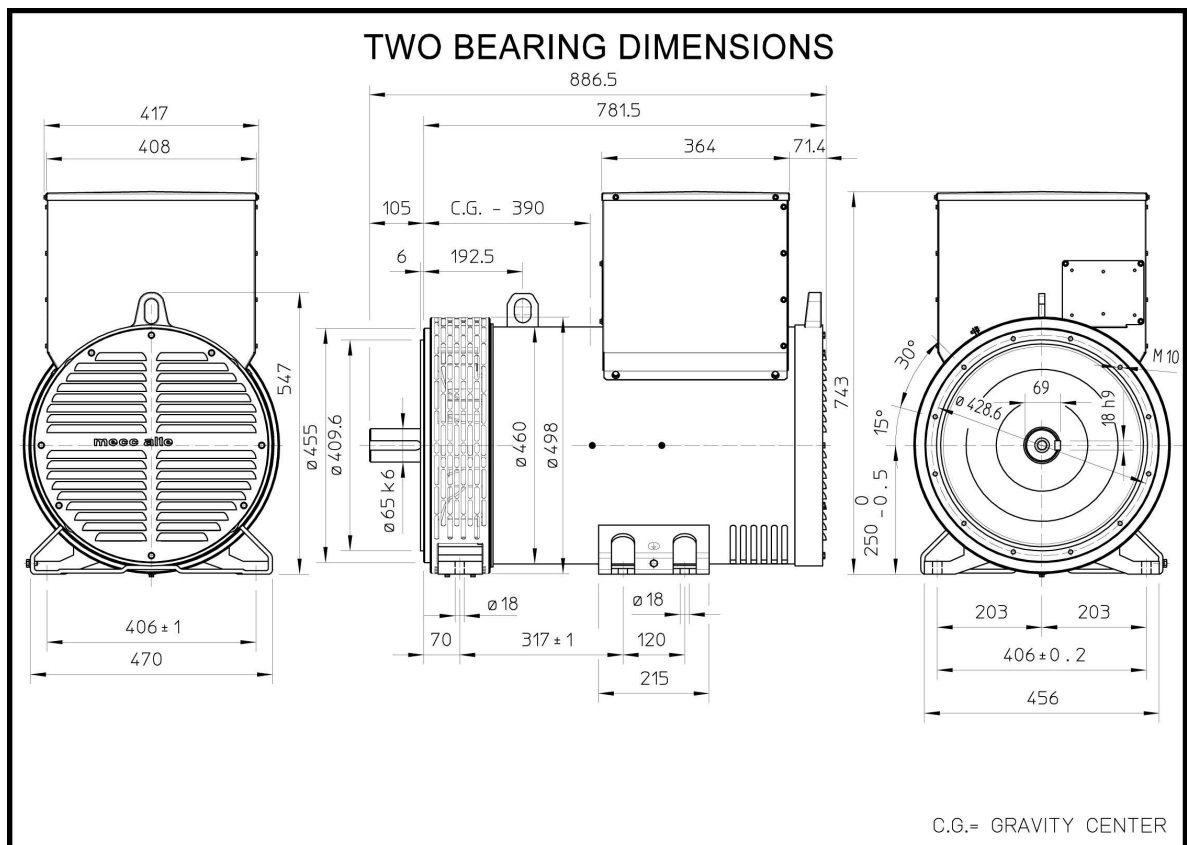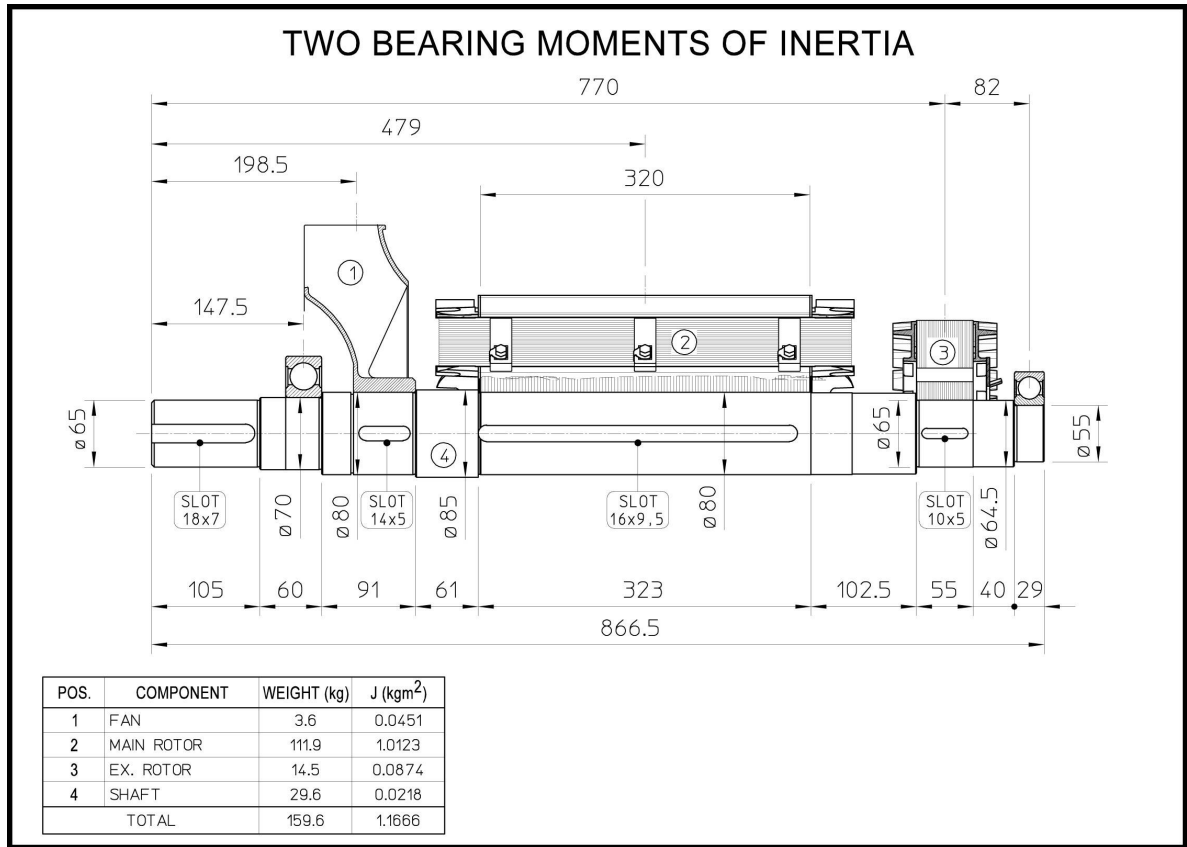



ECP34 3L4 A

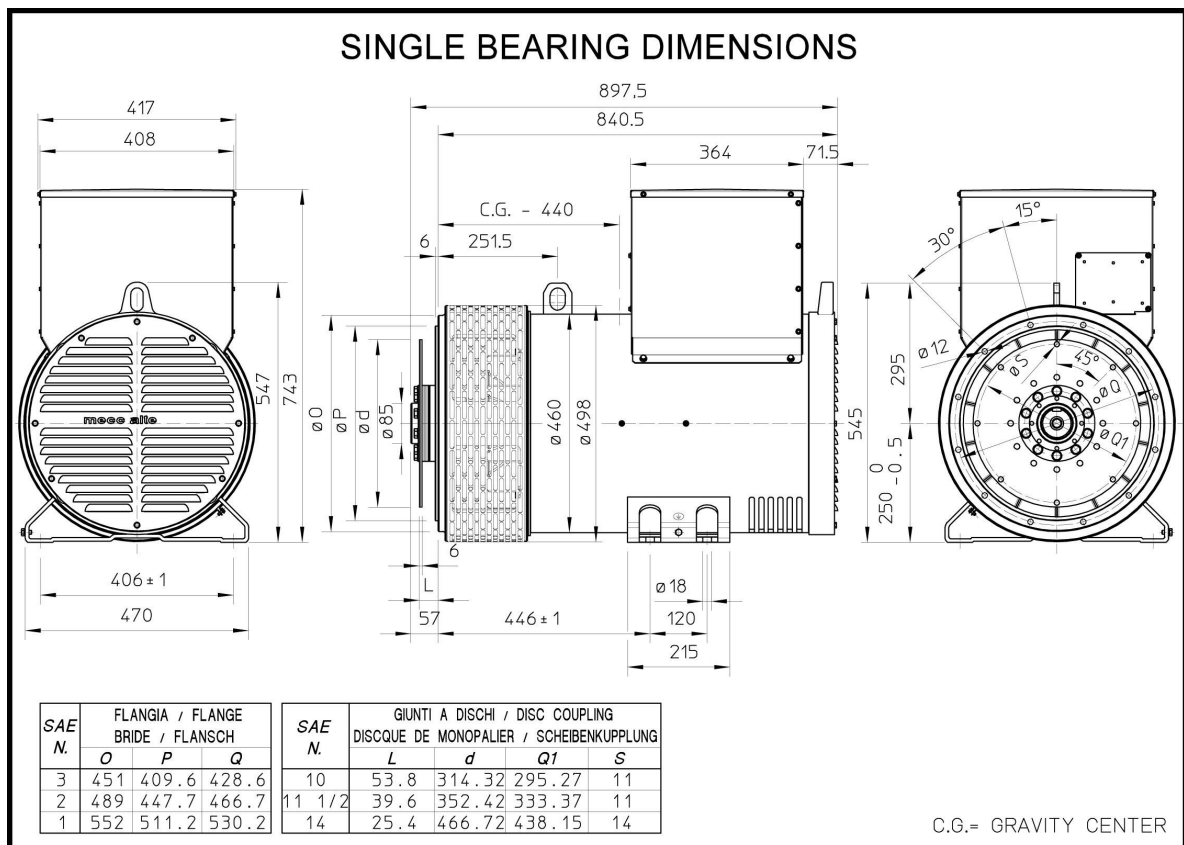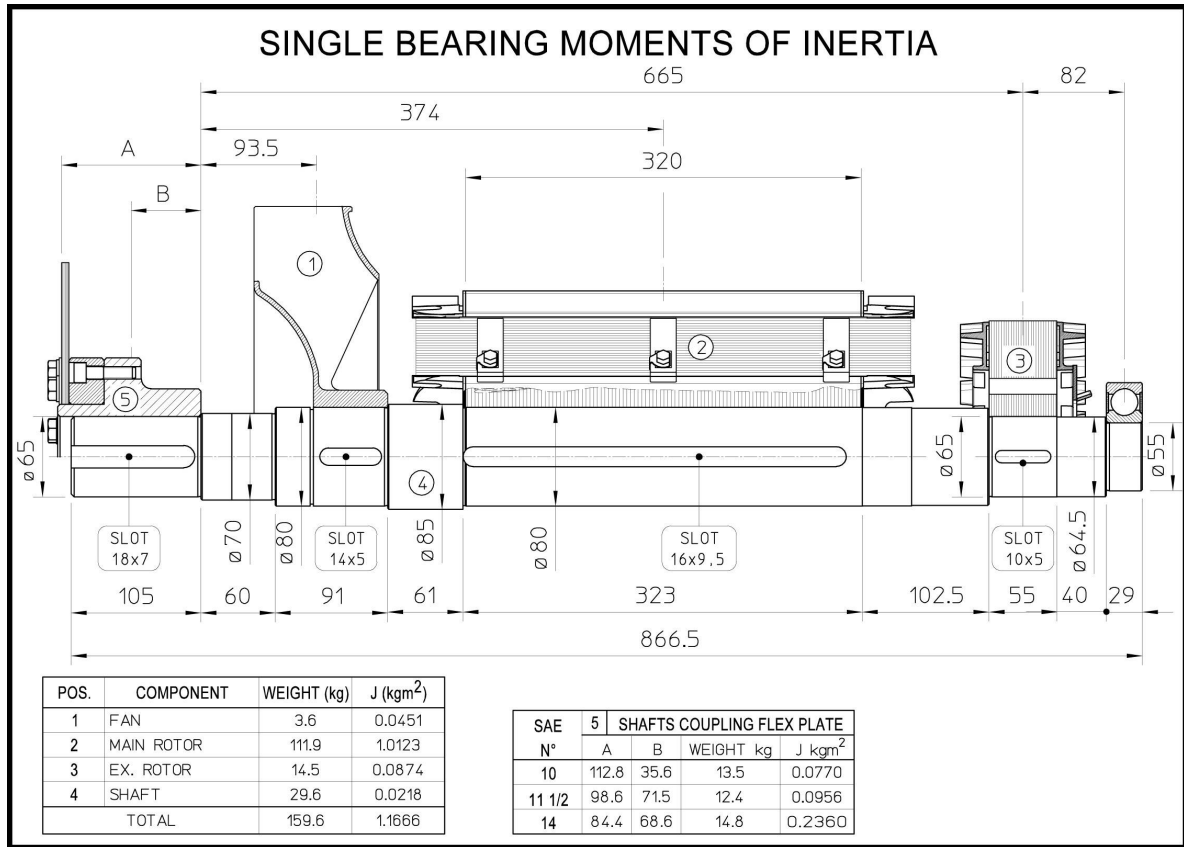





---

**Mecc Alte SpA (HQ)**

Via Roma  
20 - 36051 Creazzo  
Vicenza - ITALY  
T: +39 0444 396111  
E: info@meccalte.it  
aftersales@meccalte.it

---

**Mecc Alte Portable**

Via Roma  
20 - 36051 Creazzo  
Vicenza - ITALY  
T: +39 0444 396111  
E: info@meccalte.it

---

**Mecc Alte Power Products srl**

Via Melaro  
2 - 36075 Montecchio  
Maggiore (VI) - ITALY  
T: +39 0444 1831295  
E: info@meccalte.it

---

**Zanardi Alternatori srl**

Via Dei Laghi  
48/B - 36077 Altavilla  
Vicenza - ITALY  
T: +39 0444 370799  
E: info@zanardialternatori.it

---

**United Kingdom**

Mecc Alte U.K. LTD  
6 Lands' End Way  
Oakham  
Rutland LE15 6RF  
T: +44 (0) 1572 771160  
E: info@meccalte.co.uk

---

**Spain**

Mecc Alte España S.A.  
C/ Rio Taibilla, 2  
Polig. Ind. Los Valeros  
03178 Benijofar (Alicante)  
T: +34 (0) 96 6702152  
E: info@meccalte.es

---

**China**

Mecc Alte Alternator Haimen LTD  
755 Nanghai East Rd  
Jiangsu HEDZ 226100 PRC  
T: +86 (0) 513 82325758  
E: info@meccalte.cn

---

**India**

Mecc Alte India PVT LTD  
Plot NO: 1, Sanaswadi  
Talegaon  
Dhamdhare Road Taluka:  
Shirur, District:  
Pune - 412208  
Maharashtra, India  
T: +91 2137 619600  
E: info@meccalte.in

---

**U.S.A. and Canada**

Mecc Alte Inc.  
1229 Adams Drive  
McHenry, IL, 60051  
T: +1 815 344 0530  
E: info@meccalte.us

---

**Germany**

Mecc Alte Generatoren GmbH  
Bucher Hang 2  
D-87448 Waltenhofen  
T: +49 (0)831 540755 0  
E: info@meccalte.de

---

**Australia**

Mecc Alte Alternators PTY LTD  
10 Duncan Road, PO Box 1046  
Dry Creek, 5094, South  
Australia  
T: +61 (0) 8 8349 8422  
E: info@meccalte.com.au

---

**France**

Mecc Alte International S.A.  
Z.E.La Gagnerie  
16330 ST.Amant de Boixe  
T: +33 (0) 545 397562  
E: info@meccalte.fr

---

**Far East**

Mecc Alte (F.E.) PTE LTD  
19 Kian Teck Drive  
Singapore 628836  
T: +65 62 657122  
E: info@meccalte.com.sg



[www.meccalte.com](http://www.meccalte.com)